

S4SUN

SOLAR BOREHOLE SYSTEM





Sandro Stramare
Chief Executive Officer

WHO IS DAB?

"The added value of DAB has always been knowing when to combine long experience and tradition with the quest for technological innovation".

This challenge has been overcome thanks to the commitment of internal resources and the constant care of client relations.

Because the important thing is to always look at the origins, to never forget where you started.

The simple and effective solutions are the biggest form of innovation. The technology of our products speak the same language of those who buy or use them. This is our strength.

DAB has grown along with its employees and its clients over the years, developing a clear and unambiguous identity and providing a complete 360° service.

We have always invested a lot and we want to continue to do so. In the moments of aggregation with the client, we want to create not only a professional environment, but also a friendly one, forming a team that pursues a common objective.

The relationship with the client is not only essential, but it is also a virtuous model that keeps and maintains solid human relationships.

Because when you choose a DAB, you also choose the company, its continued support, communication and cooperation to achieve total client satisfaction.



RESIDENTIAL BUILDING SERVICE

DAB produces reliable products, technologically advanced, easy to install and efficient, ensuring high energy savings in the following domestic and residential application sectors: heating and air conditioning, water supply and pressurization, irrigation and gardening, use of rain water, drainage, collection and disposal of waste water, circulation and filtration of swimming pool water.



COMMERCIAL BUILDING SERVICE

DAB develops technologically advanced solutions, highly efficient and reliable for many commercial application sectors: from heating and air condition circulation systems, to water supply and fire fighting system pressurization, to the disposal of wastewater.



AGRICULTURE AND IRRIGATION

DAB offers pumping solutions for extraction of water from the subsoil for agricultural and irrigation applications. High quality submersible pumps and motors, reliable and capable of guaranteeing high energy efficiency. A wide range of products to meet the needs of any type of plant

SUBMERSIBLE SOLAR MOTOR

M220SOL



M220SOL

M220SOL-H

TECHNICAL DATA

Performance range:

Flow up to 21m³/h and max head of 240 meters

Motor versions:

M220SOL – 0.37 to 2.2kW (55V starting, 150m Pump Head Max)

M220SOL-H – 0.37 to 2.2kW (90V starting, 320m Pump Head Max)

Horizontal Installation:

Minimum 5° angle

Max input limit:

DC: 55 – 440Voc; 12A

90 – 440Voc; (H version)

AC: 90 – 280V; 10A

Max power output (P2): 2200W

Max speed: 3000rpm

Max water temp: 40°C

Min water temp: 0°C

General Data

- It is the ideal solution for supplying water in remote areas, where the normal power supply of electricity to the power grid is inconsistent or completely unavailable. The S4SUN is designed for ease of use, requiring no maintenance and is coupled exclusively with the DAB S4 to supply water using solar energy.
- The motor uses rare earth permanent magnets and has a built-in VFD. Vector control and MPPT are used to select the best operating point for the pump providing a highly efficient and cooler operating motor.
- Equipped with a fully built-in inverter and control system to allow direct connection of AC or DC power supplies. The inverter will guarantee even higher system operating efficiencies through less power loss and exposure to temperature variances. Therefore a smaller number of photovoltaic panels are required for the system to operate.
- The M220SOL has a lower starting voltage of 55V DC meaning less solar power required for operation.
- The M220SOL-H has a higher starting voltage requirement of 90V DC giving more support for higher pressure requirements.
- For an integrated fully automated pumping system, it is recommended that every solar motor is installed with a solar controller to use with multiple control inputs and power supplies (AC/DC).
- Dry run protection (No water in the borehole):
The motor is equipped with dry run protection. If there is insufficient water for 10 seconds the motor will stop. After 60 seconds the motor will restart and run for 10 seconds. If no water is detected, the motor will stop and attempt to restart every 30 minutes.
- Pump operation with zero flow condition (Closed Valve):
Motor will switch off but this action can take up to 3 – 45 minutes. Data received by the VSD inside the motor will be annualized and calculated in order for the motor to shut off.
- Pump operation with zero flow condition with flow sensor installed (Closed valve):
With the flow sensor (accessory) in operation, the sensor will relay the zero flow information to the controller and after 3 minutes the motor will shut down unless flow resumes.

ELECTRICAL DATA

MOTOR TYPE	AC V	DC V	P2 kW	In AC A	In DC A	AC MAX W	DC MAX W	RPM
MOTOR M220SOL	90-280	55-440	2,2	10	12	2200	3000	3000
MOTOR M220SOL-H	90-280	90-440	2,2	10	12	2200	3000	3000


DIMENSIONS

MOTOR TYPE	LENGHT mm	WEIGHT kg	DIAMETER mm
MOTOR M220SOL	655	13,5	100
MOTOR M220SOL-H	695	14,5	95

SUBMERSIBLE SOLAR MOTOR

M220SOL

MATERIALS

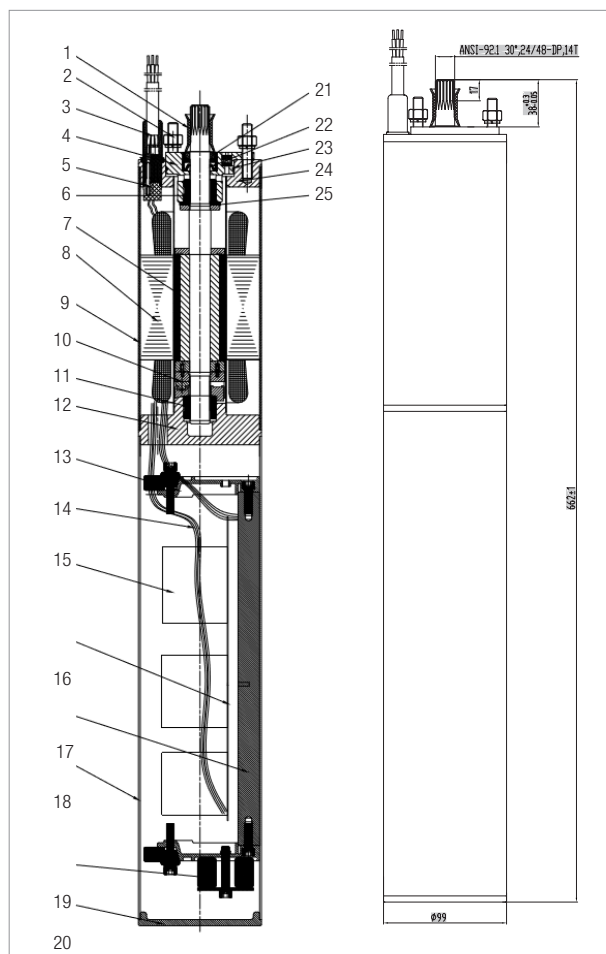

NO.	COMPONENTS	MATERIAL
1	Sediment /Sand Guard	Fluorine Rubber
2	Fasteners	Stainless steel AISI 316
3	Cable gland	--
4	Upper Bearing Housing	Stainless steel AISI 304L
5	Internal cable connection	Stainless steel AISI 316 / Nitrile rubber
6	Upper Bearing	Graphite
7	Permanent Magnet Rotor	--
8	Stator	--
9	Motor Housing	Stainless steel AISI 304L
10	Thrust Bearing	Graphite / Stainless Steel AISI 420
11	Lower Bearing Support	Graphite
12	Lower Bearing Housing	Stainless steel AISI 304L
13	Stent	--
14	Internal Wire	--
15	Capacitor	--
16	PABA	--
17	Radiator	Aluminium
18	Base Plate	Stainless steel AISI 304L
19	Inductor	--
20	Base	Stainless Steel 304
21	Mechanical Seal / Sand Ring	Silicone Carbide
22	Lip Seal	Nitrile Rubber
23	O Ring	Nitrile Rubber
24	Upper Housing	Stainless steel AISI 304L
25	Wear Pads	Polytetrafluoroethylene

SOLAR MOTOR CONTROLLER

M220CON



General Data

The M220CON controller is a microcontroller, designed, developed and manufactured for the S4SUN. It is suitable for simultaneous AC and DC incoming power supplies. The controller is capable of switching manually or automatically between two power supplies depending on DC/Solar power availability.

AC, DC power mode or AUTO mode switchable.

In AC mode, the incoming power source can be from the main power supply or a generator. In DC mode, the power supply is from solar panels. However, DC will be the favoured power supply. When DC power source is below minimum 55V (M220) or 90V (M220-H) the device shuts down the supply for 10min's then switches to AC power when DC power returns it automatically switches back.

Features

- The M220CON controller can take signals from two digital switches placed in a tank or similar.
- The controller can also be configured as a pressure system with pressure switch, non-return valve and pressure tank.
- The high-level float LED light on the M220CON controller will indicate that the tank is full and will stop the pump.
- The low-level float LED light on the M220CON controller will indicate that the tank is empty and will start the pump after 10 minutes.
- On power-up, if the tank is not full, then the M220CON controller powers the pump to fill the tank.
- The M220CON controller is suitable for outdoor installation and is weather-proof (IP65 enclosure). However, installation in direct sunlight should be avoided.

Adjustable generator shut off timer to prevent repeated starting:

- The controller will automatically switch between DC and AC depending on device voltage.
- This timer locks the generator into a run state while the DC input stabilizes.

Adjustable flow sensor restart timer:



- Adjust restart delay after no flow, ideal for low yielding water source applications.
- Once zero flow is detected the control will maintain operation for 3 minutes then turn off the pump.
- There is a two minute lock out cycle when power is supplied to the controller.

Sizing of generator:

- Total Watt of the solar array, multiplied by 1.1 and then divided by 0.8 to arrive at the minimum kVA required from the generator.

SOLAR MOTOR CONTROLLER

WIRING DIAGRAM

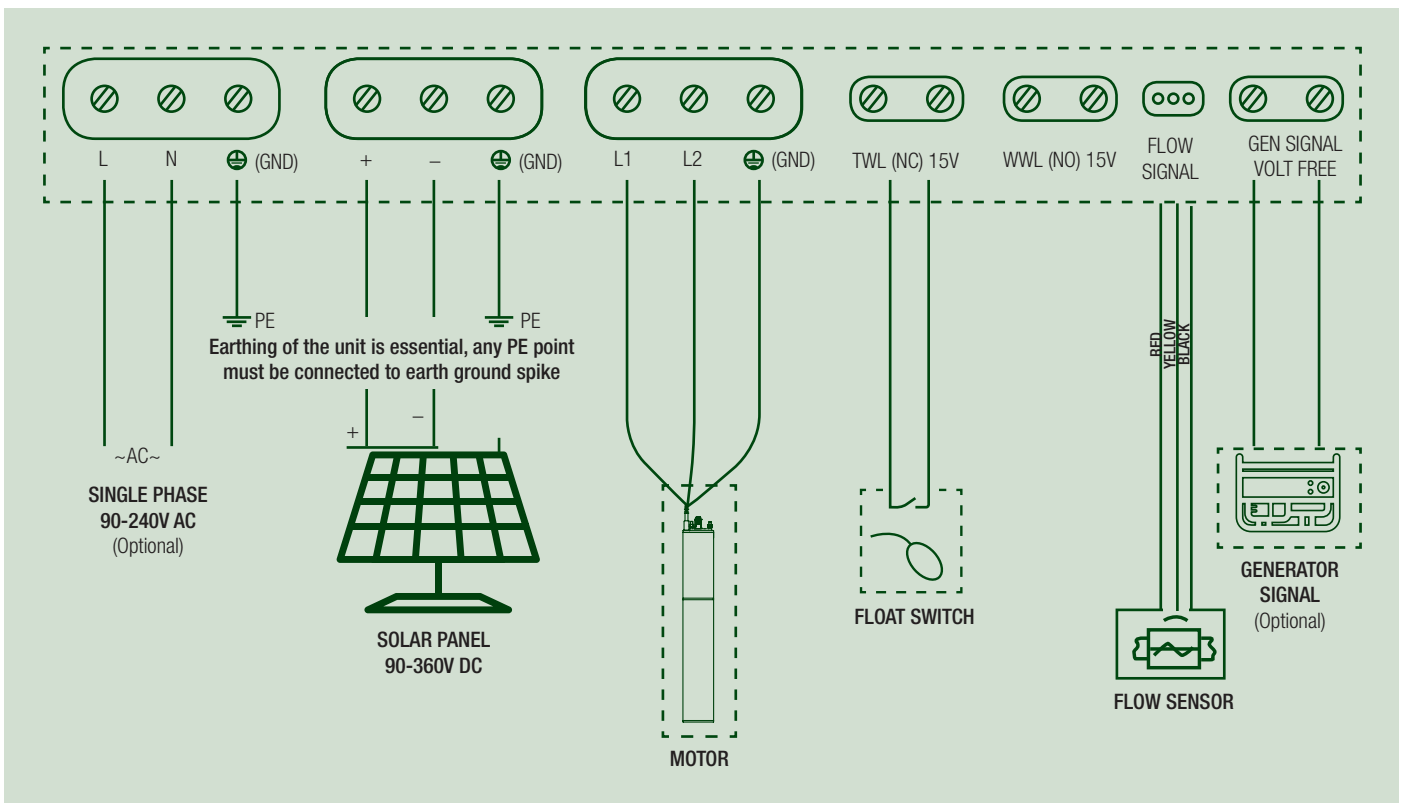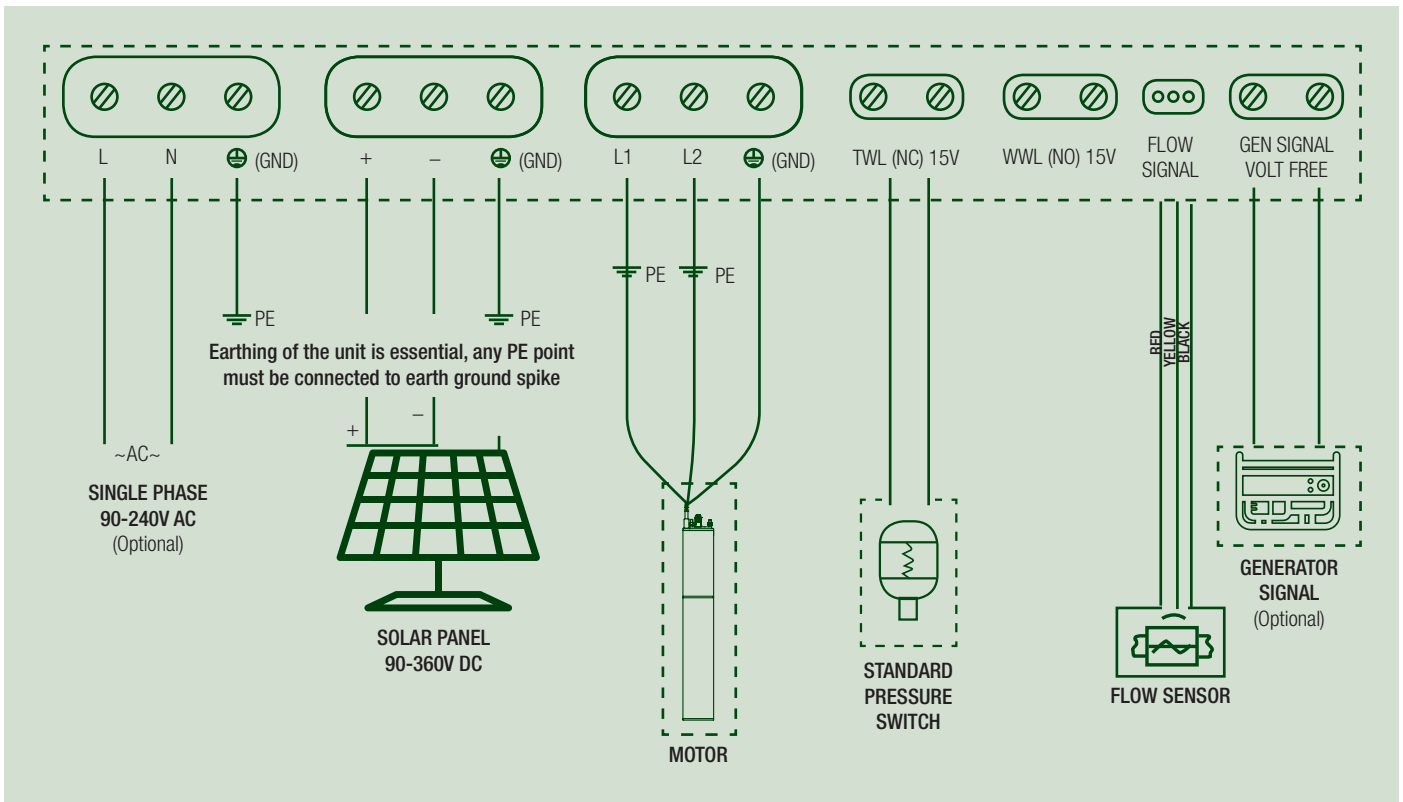

ACCESSORIES

Flow Sensor	Item Desc	Specification	Waterproof cable	Item Desc	Specification
	Flow sensor 2" with waterproof connection	Inlet & outlet diameter is 2", flow range 10-300L/min, working voltage 3-24V, pulse characteristic F=0.2*Q, pressure range =>2.0MPa (To be used with waterproof cable)		Flow sensor cable - 10m extra length waterproof	10 meters extra length waterproof cable to suit flow sensor with waterproof connectors
Zinc Anode	Item Desc	Specification	Solar Panel	Item Desc	Specification
	Zinc anode	50mm clamp on 50mm		330 Watt solar panel	Wattage 330 V _{oc} (V): 46.15 - 46.27 I _{sc} (A): 8.92 - 9.41 Dimensions (mm) (±2) 1958 x 987 x 40

CABLE SELECTION


Solar Panel Input			Cable Length H (Up to 'X' Meters)									
			10	25	50	75	100	125	150	200	250	300
DC Input Power (W)	VMPP (V)	IMPP (A)	Cross Section mm ²									
600	60	10	2,5	6	16	25	25	35	35	50	70	70
700	70	10	2,5	6	10	16	25	25	35	50	50	70
800	80	10	2,5	6	10	16	25	25	25	35	50	50
900	90	10	1,5	4	10	16	16	25	25	35	50	50
1000	100	10	1,5	4	10	10	16	25	25	35	35	50
1100	110	10	1,5	4	10	10	16	16	25	25	35	50
1200	120	10	1,5	4	6	10	16	16	25	25	35	35
1300	130	10	1,5	4	6	10	16	16	16	25	35	35
1400	140	10	1,5	2,5	6	10	10	16	16	25	25	35
1500	150	10	1,5	2,5	6	10	10	16	16	25	25	35
1600	160	10	1,5	2,5	6	10	10	16	16	25	25	25
1700	170	10	1,5	2,5	4	6	10	10	16	16	25	25
1800	180	10	1,5	2,5	4	6	10	10	16	16	25	25
1900	190	10	1,5	2,5	4	6	10	10	16	16	25	25
2000	200	10	1,5	2,5	4	6	10	10	10	16	25	25
2100	210	10	1,5	2,5	4	6	10	10	10	16	16	25
2200	220	10	1,5	2,5	4	6	10	10	10	16	16	25
2300	230	10	1,5	1,5	4	6	6	10	10	16	16	25
2400	240	10	1,5	1,5	4	6	6	10	10	16	16	25
2500	250	10	1,5	1,5	4	4	6	10	10	16	16	16
2600	260	10	1,5	1,5	4	4	6	10	10	16	16	16
2700	270	10	1,5	1,5	2,5	4	6	10	10	10	16	16
2800	280	10	1,5	1,5	2,5	4	6	6	10	10	16	16
2900	290	10	1,5	1,5	2,5	4	6	6	10	10	16	16
3000	300	10	1,5	1,5	2,5	4	6	6	10	10	16	16
3100	310	10	1,5	1,5	2,5	4	6	6	10	10	16	16

INSTALLATION GUIDE

BEST PRACTICE


Option 1: System using mechanical float switch, pressure switch, pressure tank, flow sensor & NRV

DC & AC POWER WIRING

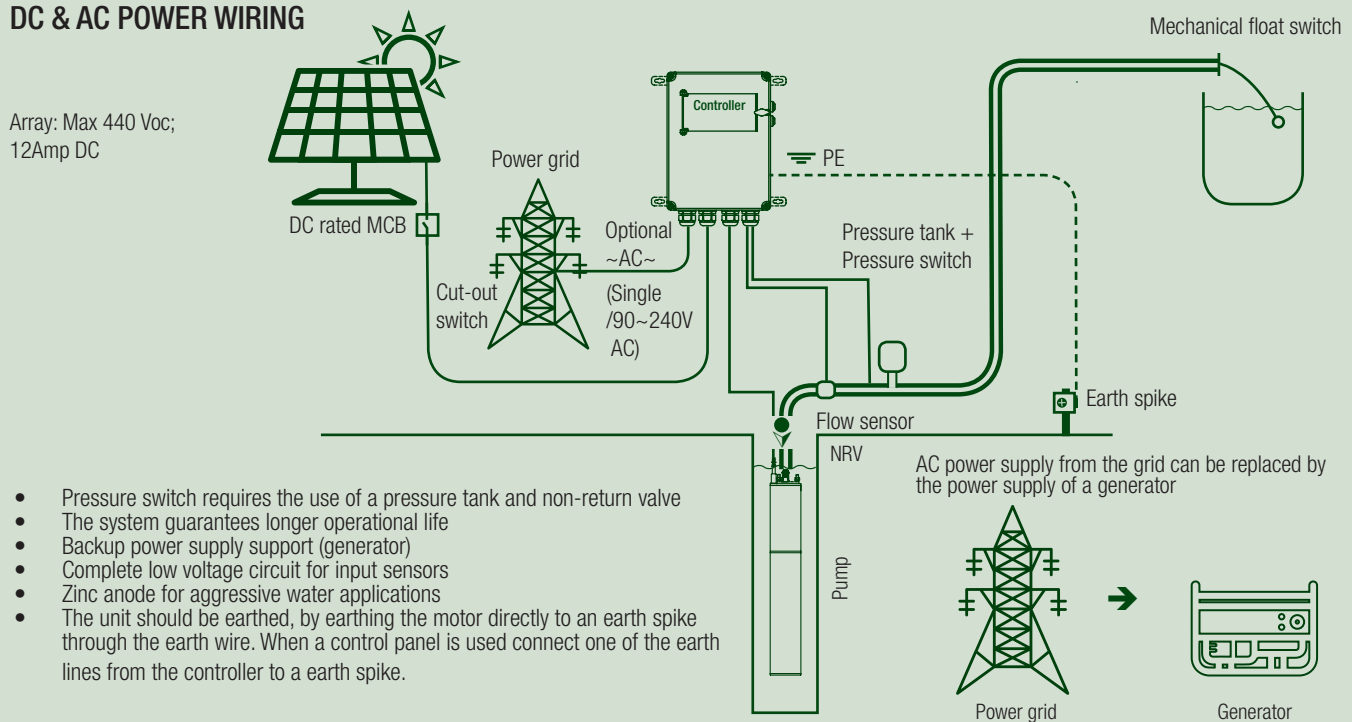

Option 2: System using electronic float switch, flow sensor & NRV

DC & AC POWER WIRING

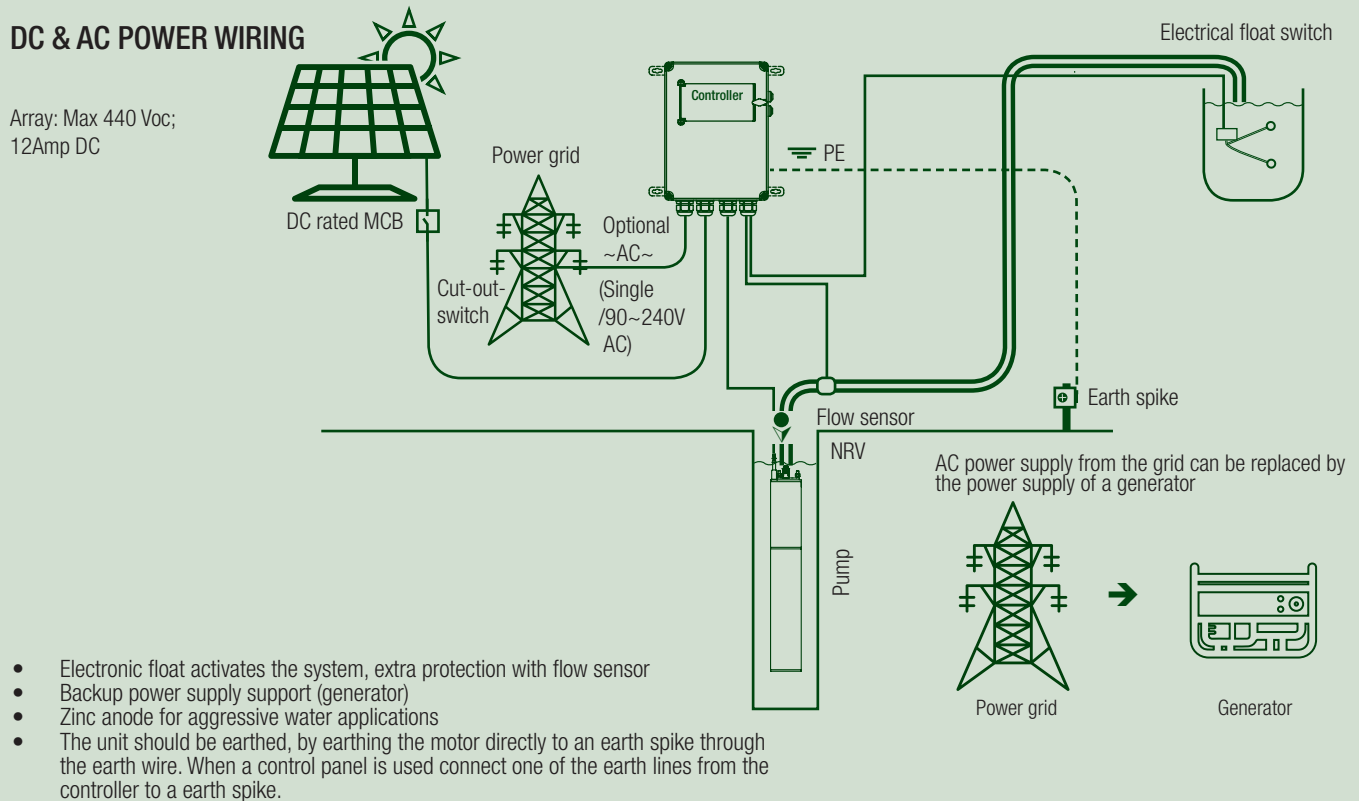


INSTALLATION GUIDE

BEST PRACTICE


Option 3: System using flow sensor & NRV

DC & AC POWER WIRING

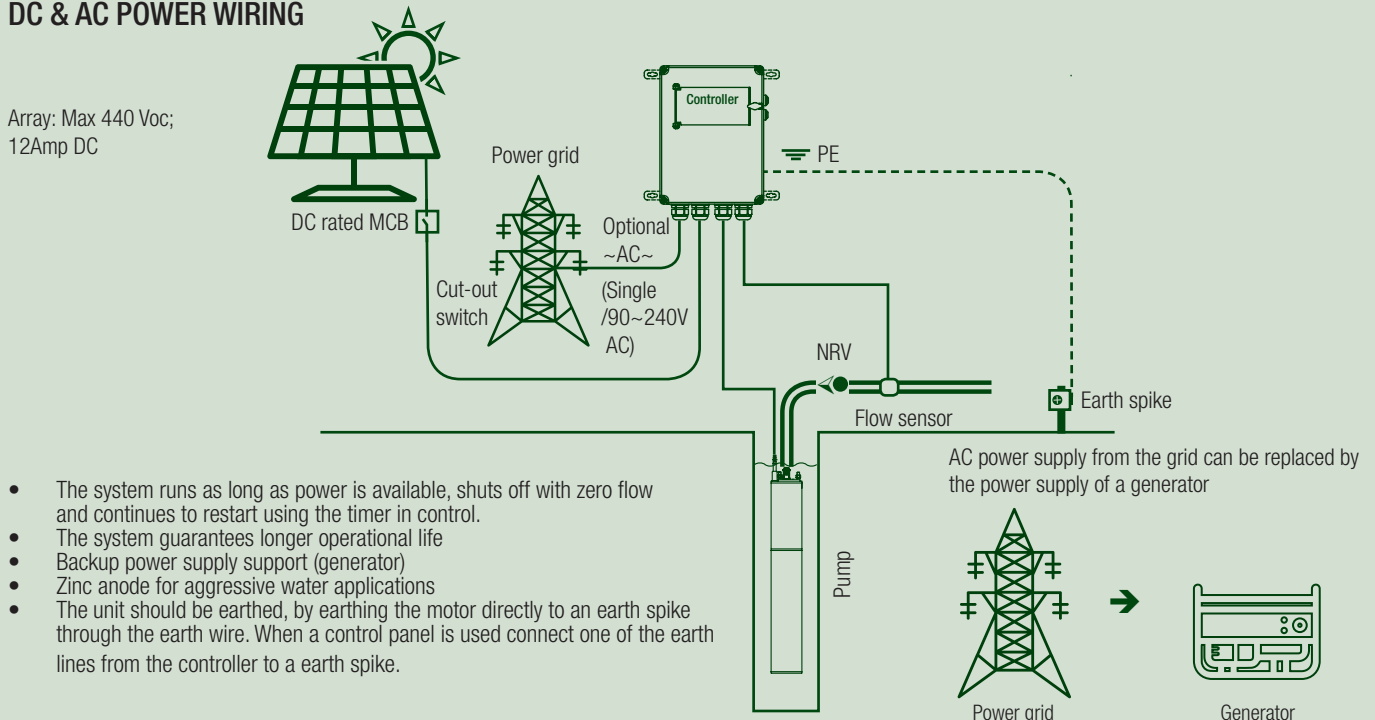

Horizontal installation of the system using electronic float switch, flow sensor & NRV

DC & AC POWER WIRING

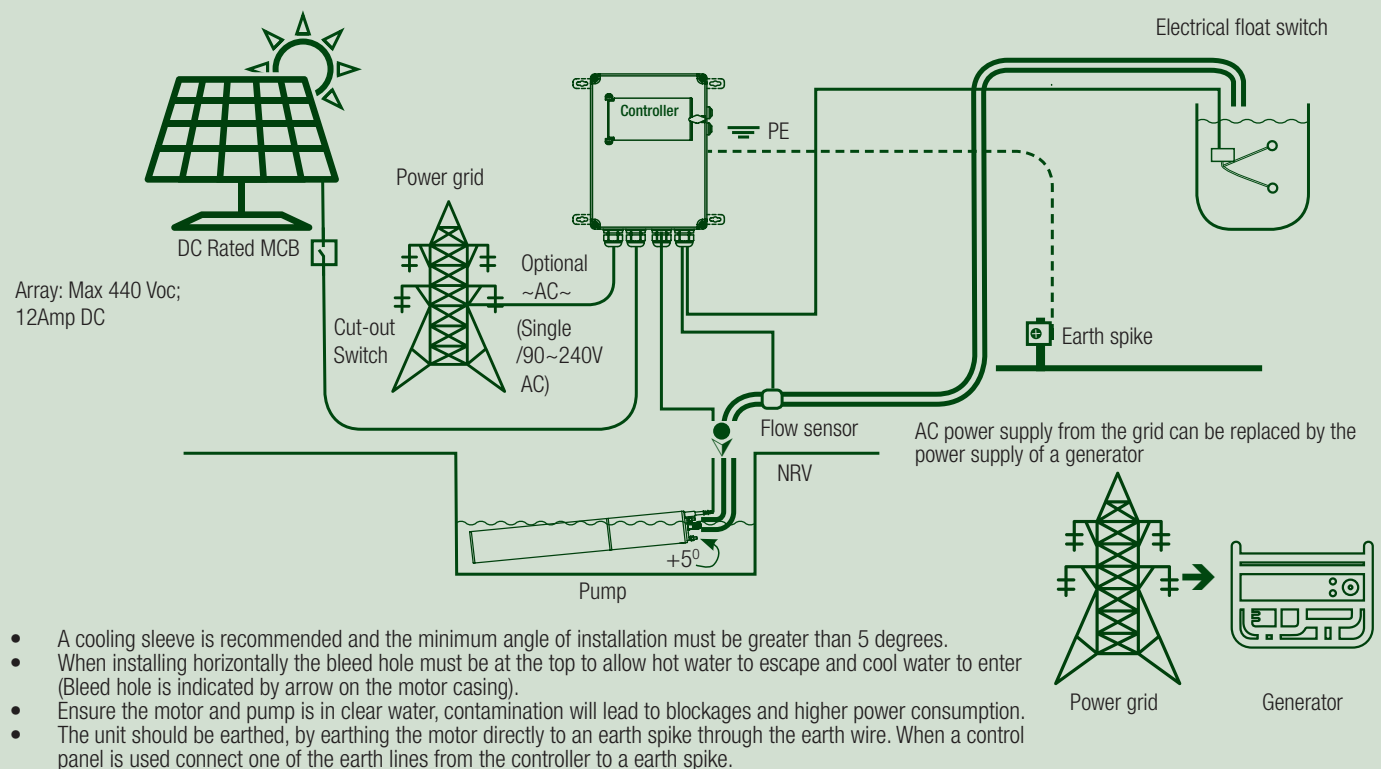


EASY SOLAR SELECTION CHART

Flow (l/h)	Total Pump Head (m)	S4SUN Model	Panel Selection Based on 330W solar panels connected in series
900	240	S4SUN 2/40 H	8
1020	240	S4SUN 2/40 H	8
1020	50	S4SUN 1/19 L	3
1020	80	S4SUN 1/26 L	4
1020	115	S4SUN 1/37 L	5
1020	130	S4SUN 1/37 L	6
1200	200	S4SUN 2/40 H	8
1500	160	S4SUN 4/27 H	9
1500	180	S4SUN 2/40 H	8
1800	160	S4SUN 2/28 H	8
2100	160	S4SUN 3/39 H	9
2160	20	S4SUN 2/7 L	2
2160	30	S4SUN 2/10 L	2
2160	48	S4SUN 2/14 L	3
2160	63	S4SUN 2/20 L	4
2160	90	S4SUN 2/28 L	6
2160	130	S4SUN 2/28 L	8
3000	20	S4SUN 3/13 L	2
3000	30	S4SUN 3/19 L	3
3000	40	S4SUN 3/19 L	3
3000	60	S4SUN 3/19 L	4
3000	80	S4SUN 3/32 L	7
3000	100	S4SUN 3/39 L	8
3000	120	S4SUN 3/39 L	10
3600	20	S4SUN 4/7 L	2
3600	32	S4SUN 4/9 L	3
3600	40	S4SUN 4/9 L	4
3600	65	S4SUN 4/19 L	6
3600	90	S4SUN 4/27 L	8
5400	20	S4SUN 6/7 L	3
5400	30	S4SUN 6/10 L	4
5400	40	S4SUN 6/14 L	5
5400	55	S4SUN 6/21 L	8
7800	20	S4SUN 8/6 L	4
7800	30	S4SUN 8/13 L	6
7800	40	S4SUN 8/13 L	8
12000	20	S4SUN 12/11 L	7
15600	15	S4SUN 16/8 L	7
15600	20	S4SUN 16/8 L	8


* The easy solar selection chart is only a guideline and final selection should be confirmed by the performance curve.

S4-1 SERIES


S4-1/13

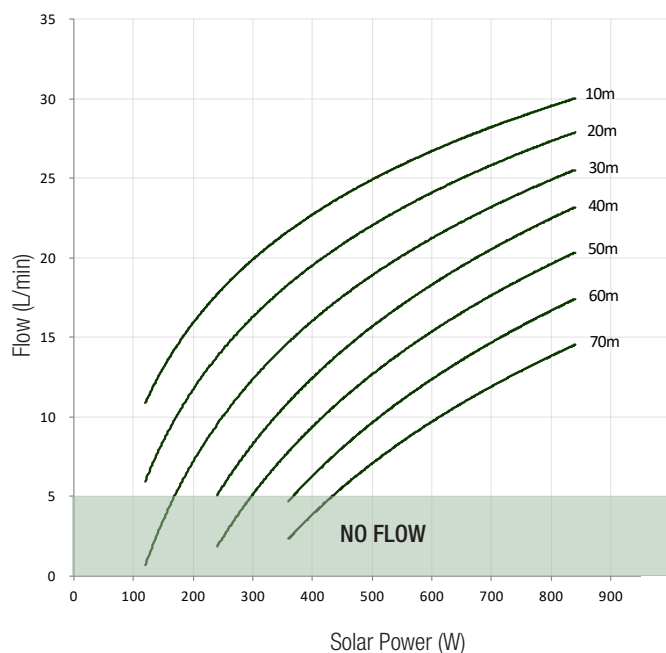


S4-1/19

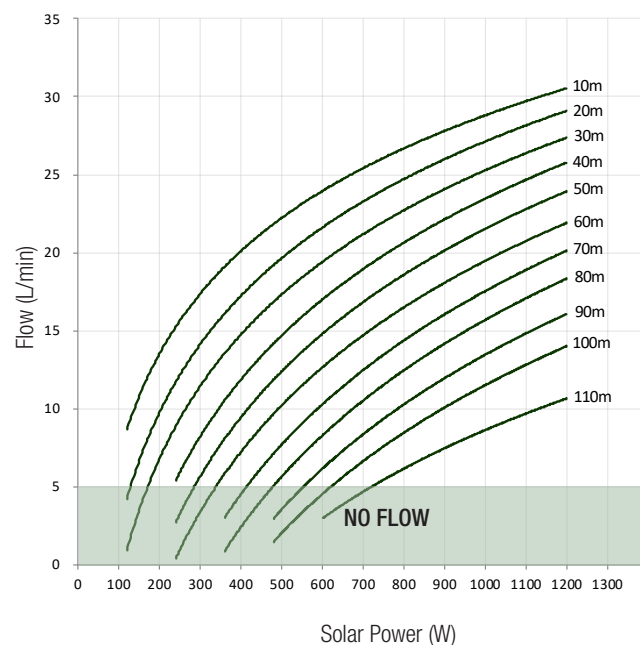

S4-1/26

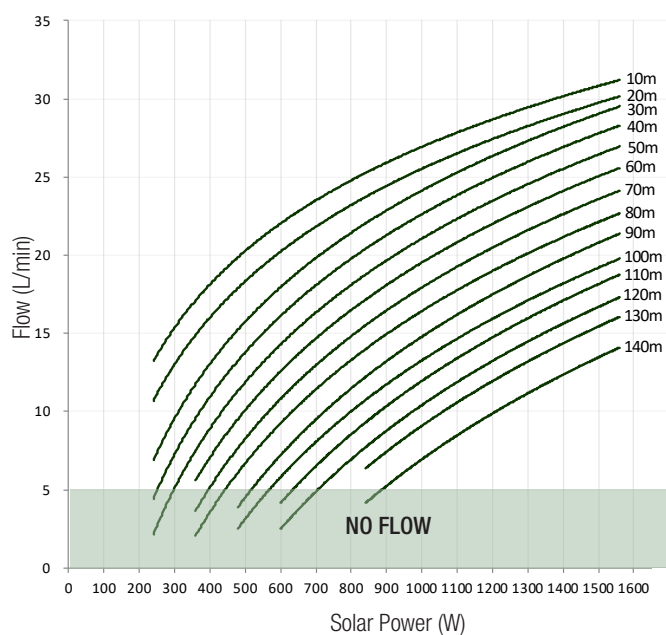


S4-1/37

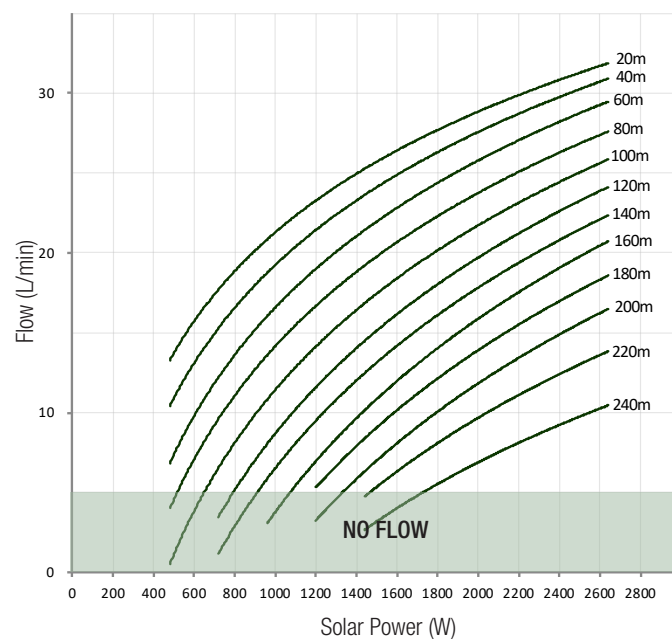


S4-2 SERIES


S4-2/5

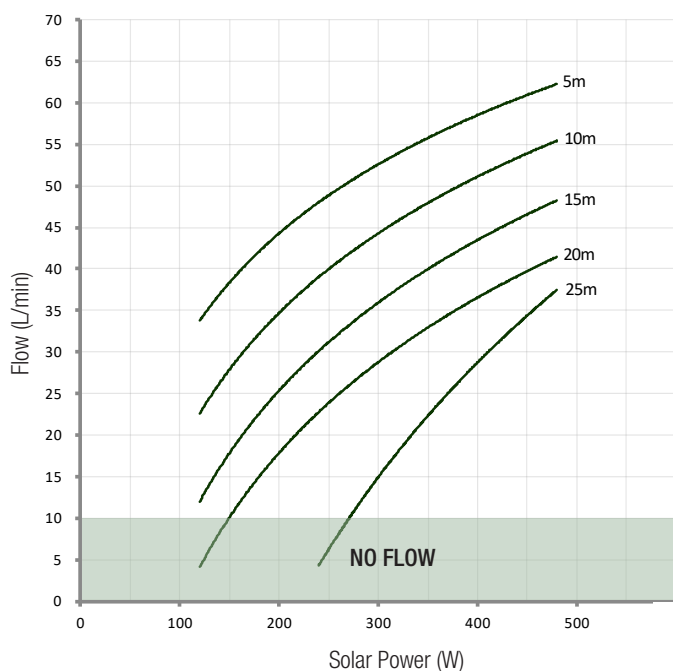


S4-2/7

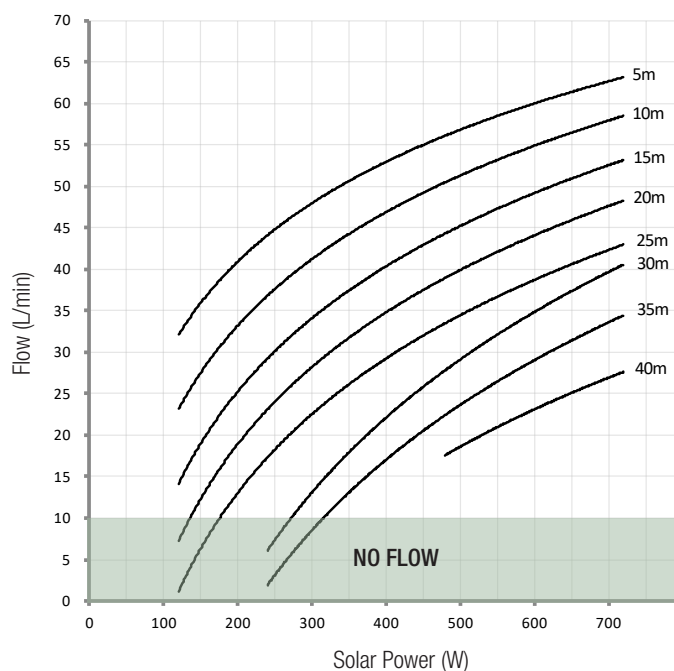

S4-2/10

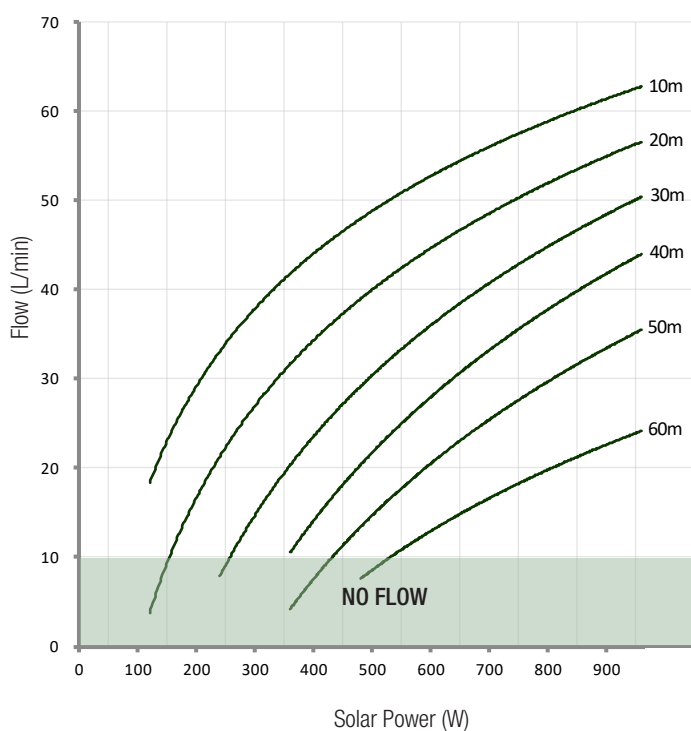


S4-2/14

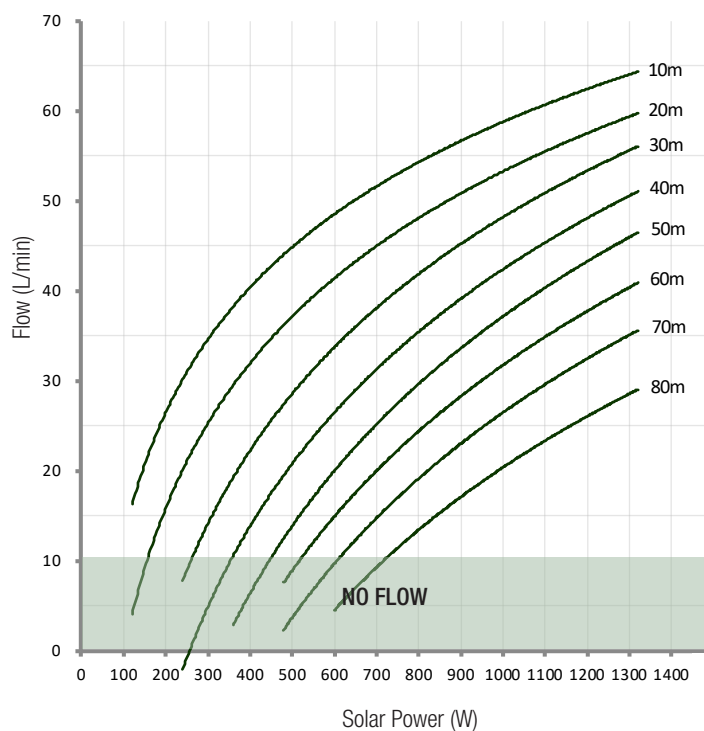


S4-2 SERIES


S4-2/20

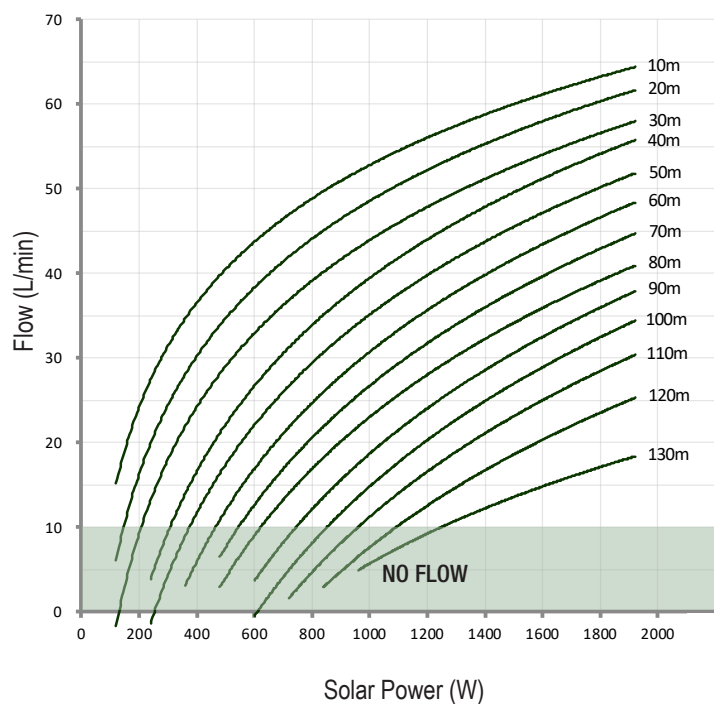

S4-2/28

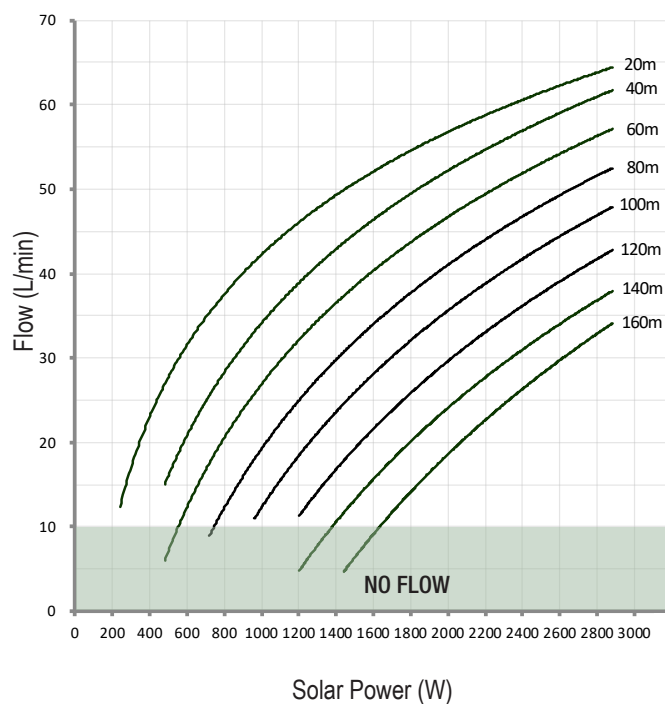


S4-2/40

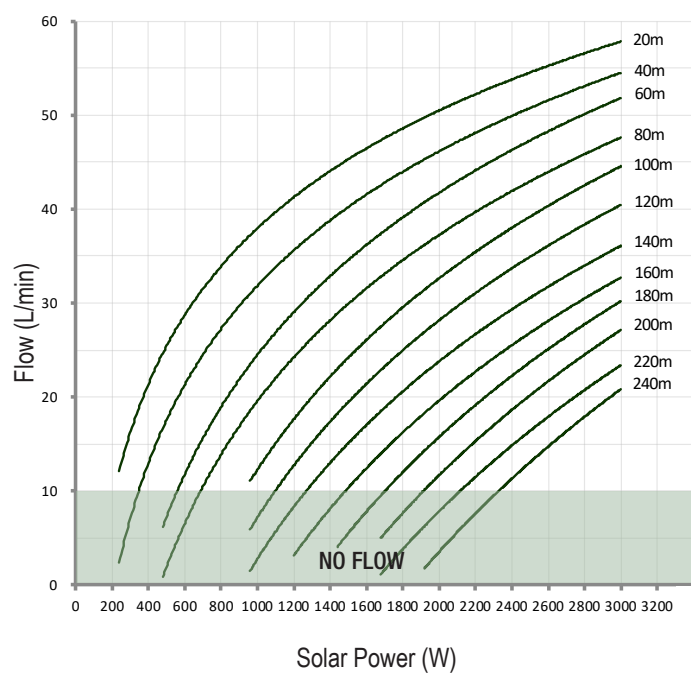


S4-3 SERIES


S4-3/6

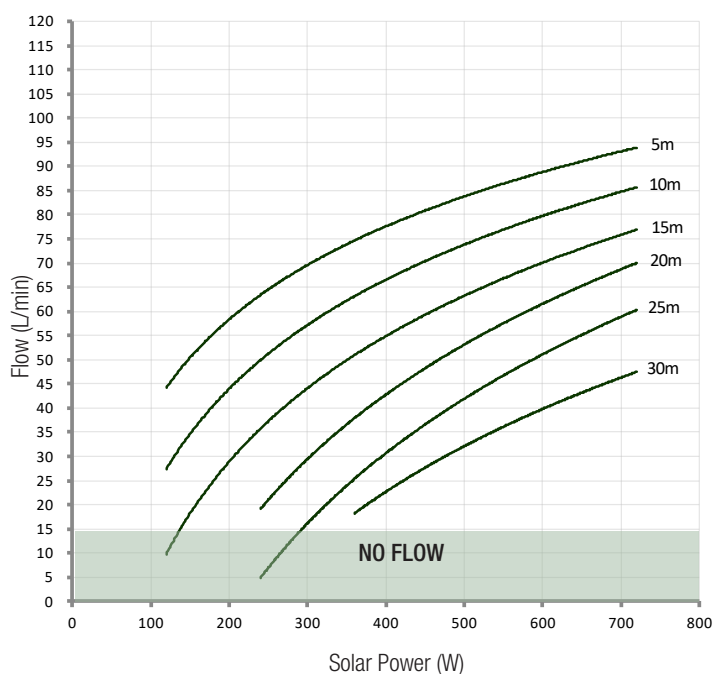


S4-3/9

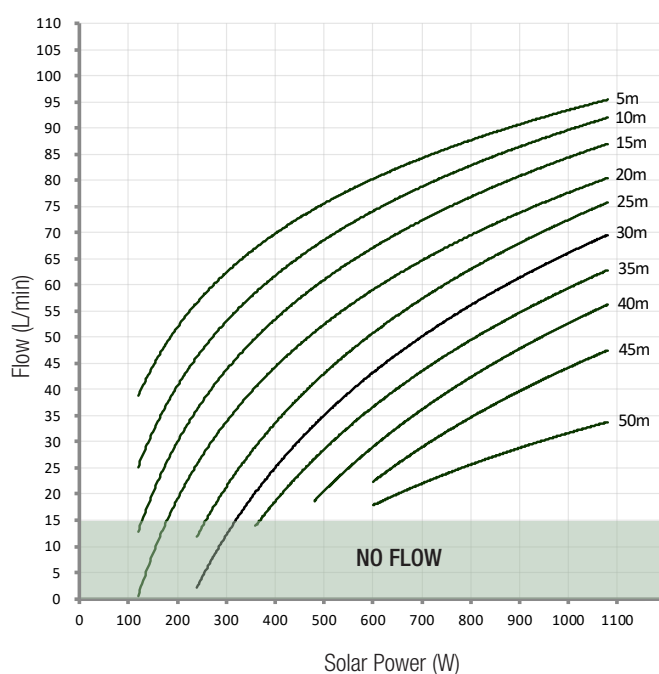

S4-3/13

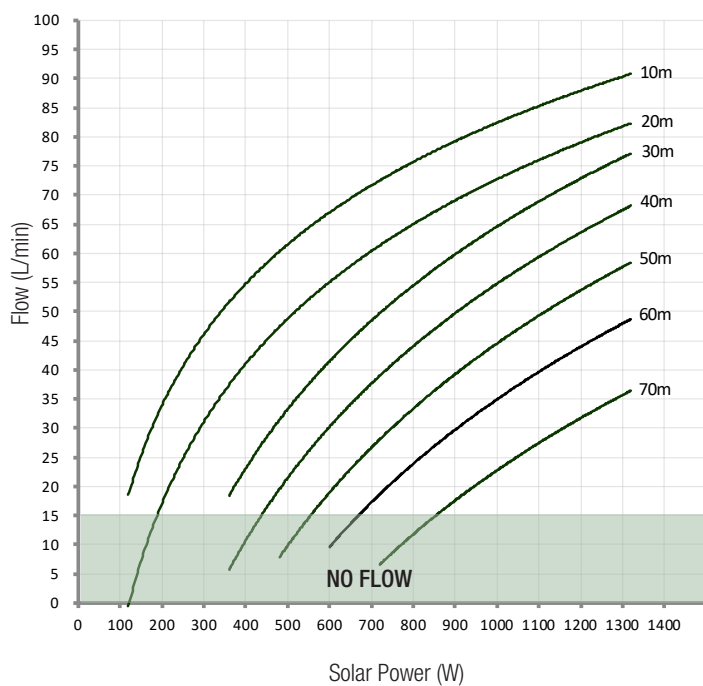


S4-3/19

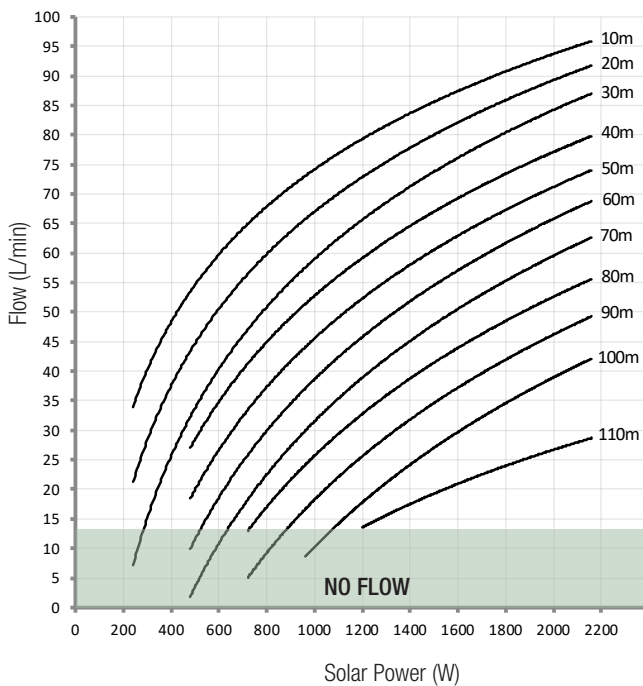


S4-3 SERIES


S4-3/25

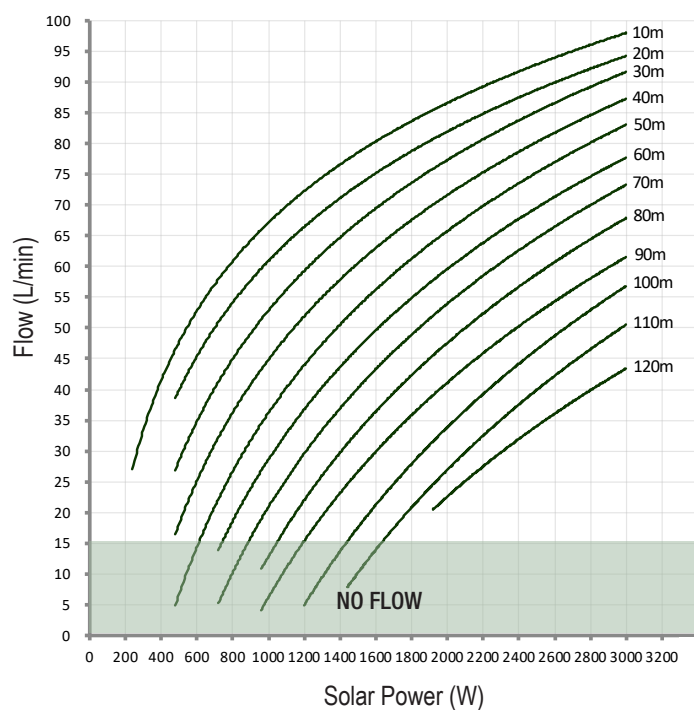

S4-3/32

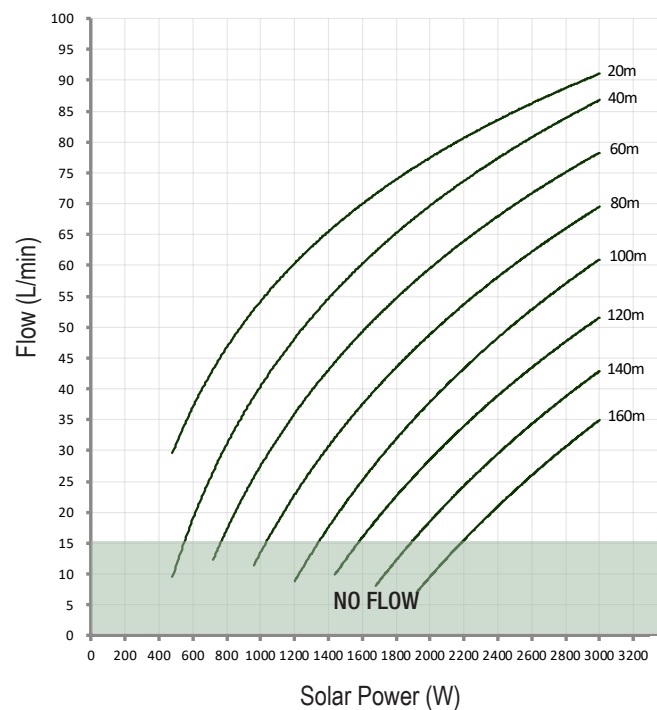


S4-3/39

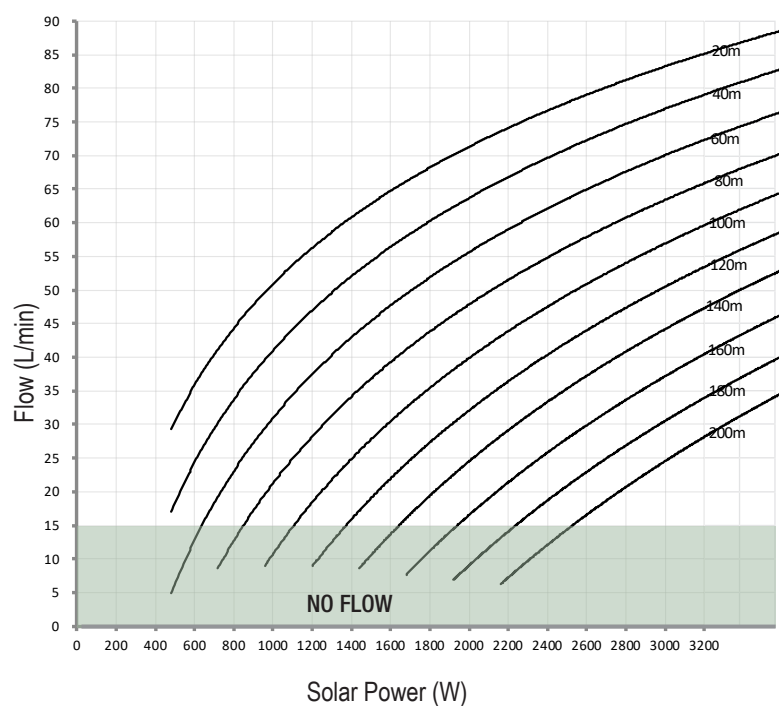


S4-4 SERIES


S4-4/4

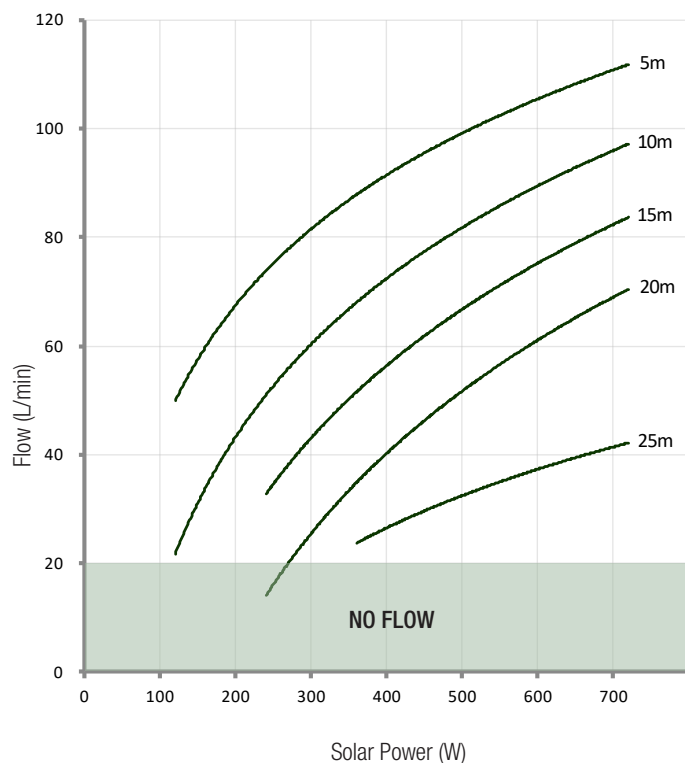


S4-4/7

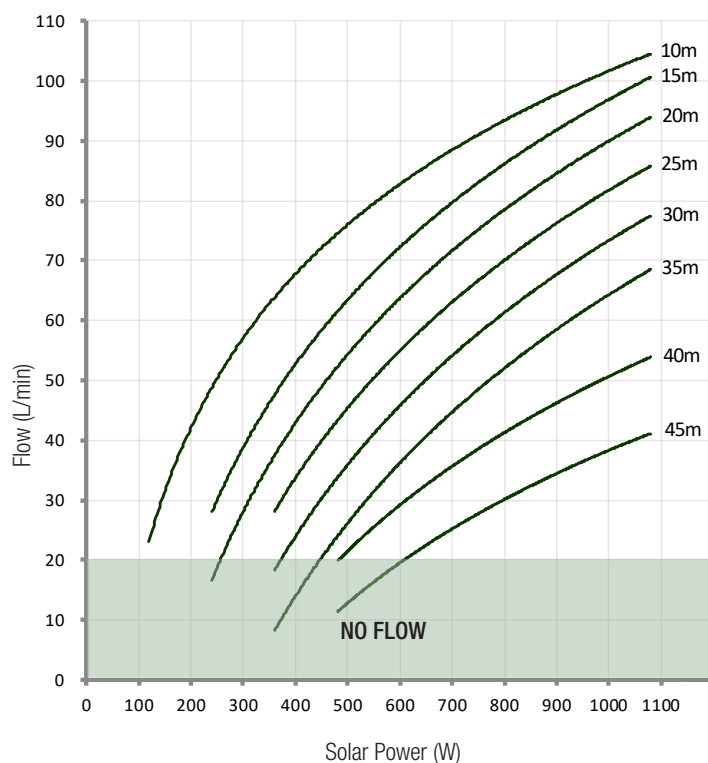

S4-4/9

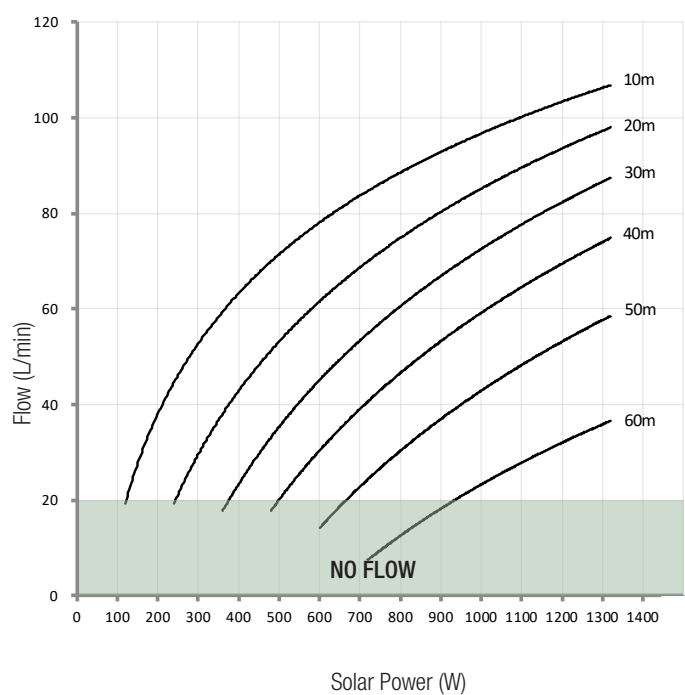


S4-4/14

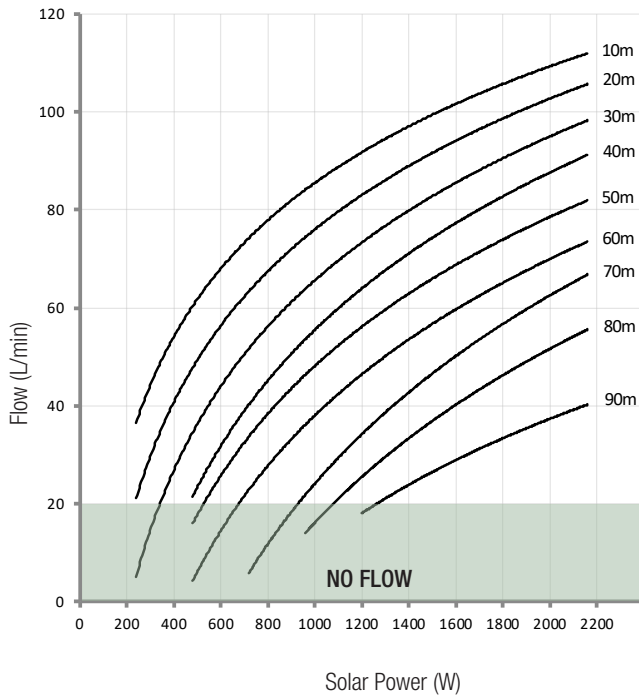


S4-4 SERIES

S4-4/19

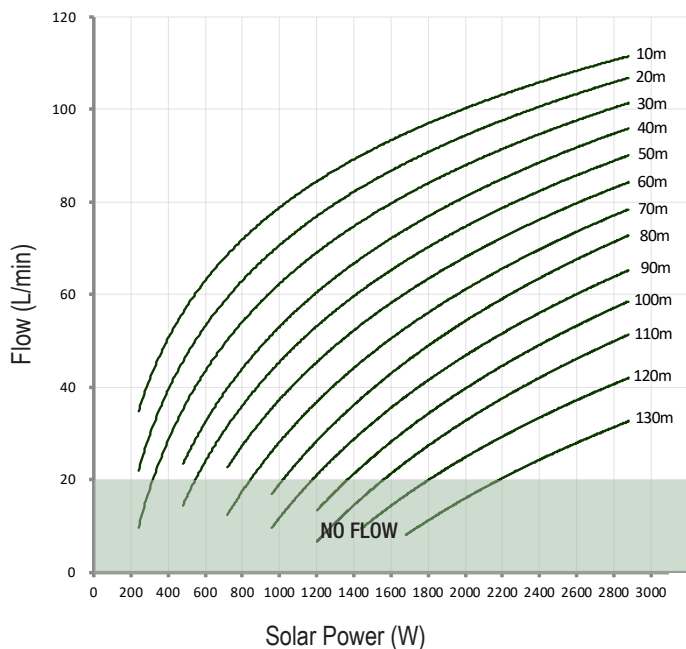


S4-4/27

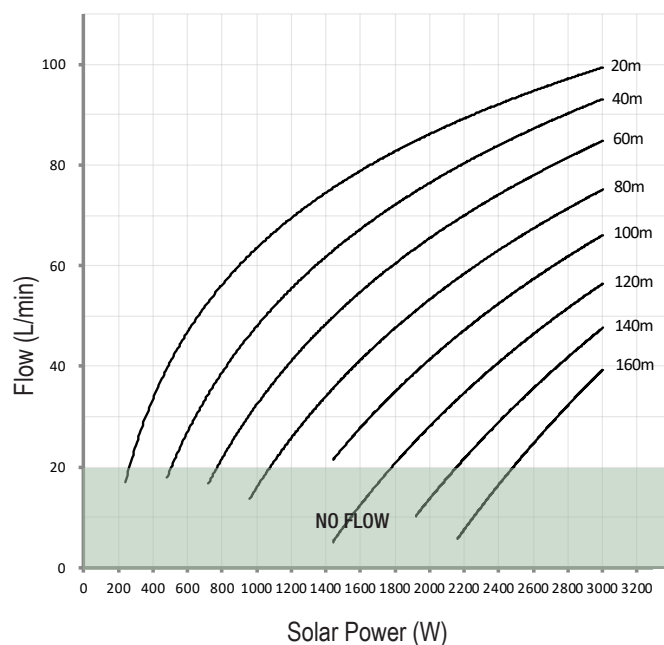


S4-6 SERIES

S4-6/5

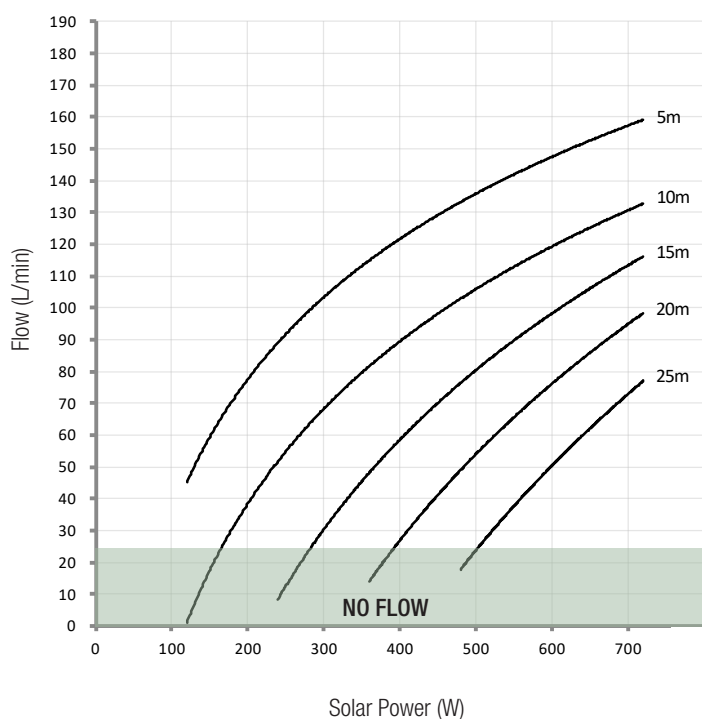


S4-6/7

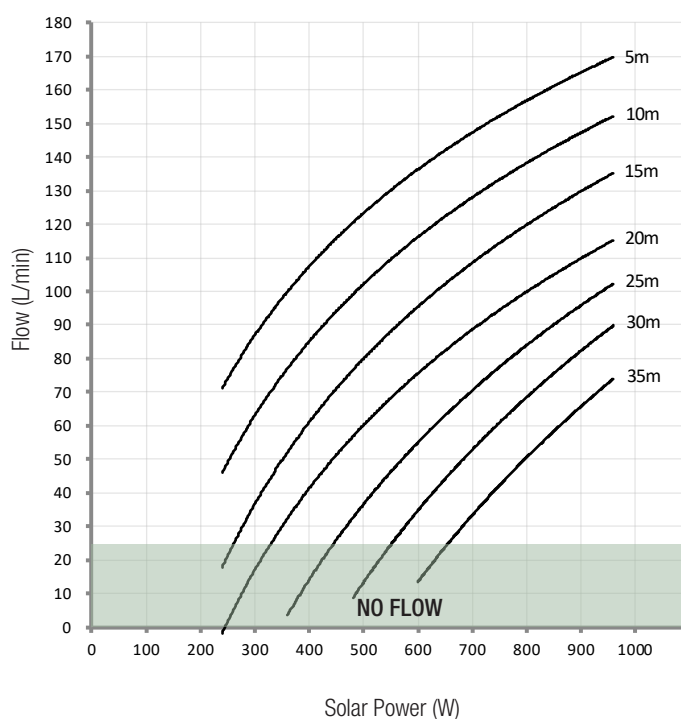


S4-6 SERIES


S4-6/10

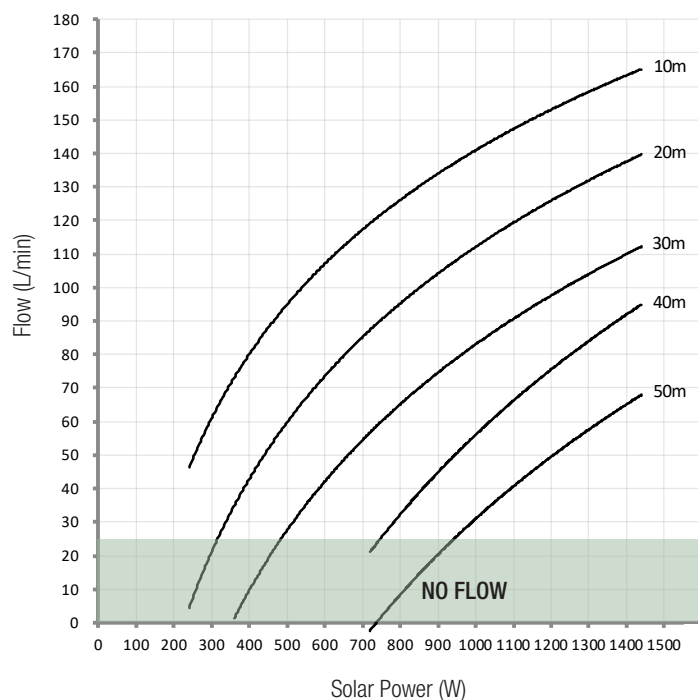

S4-6/14

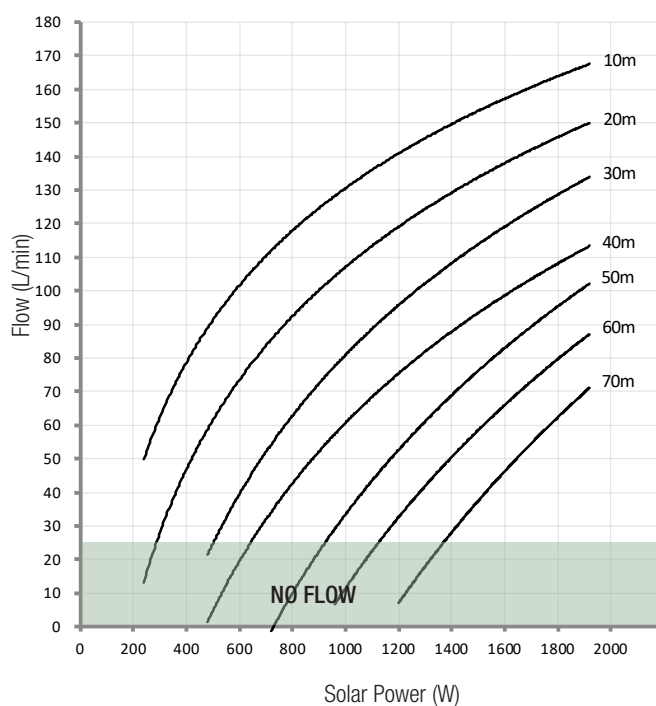


S4-6/21

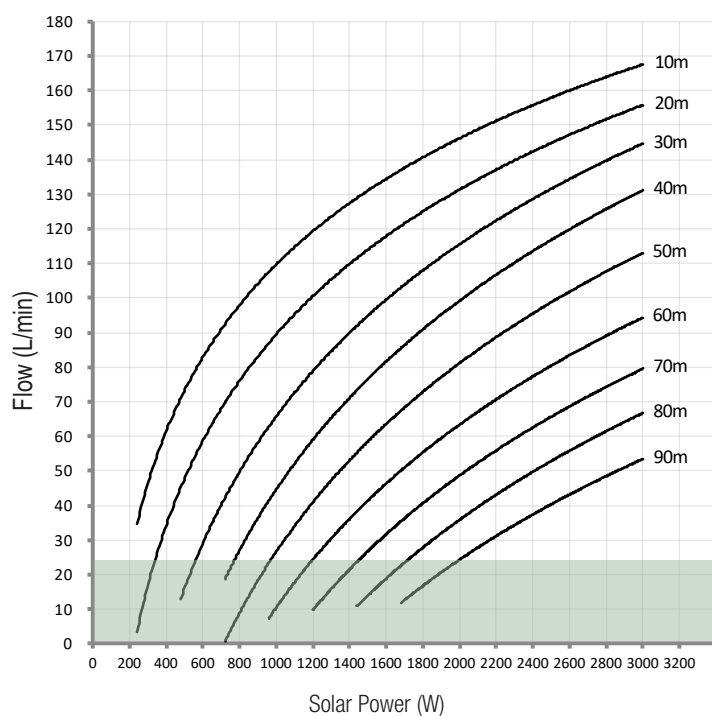


S4-8 SERIES


S4-8/4

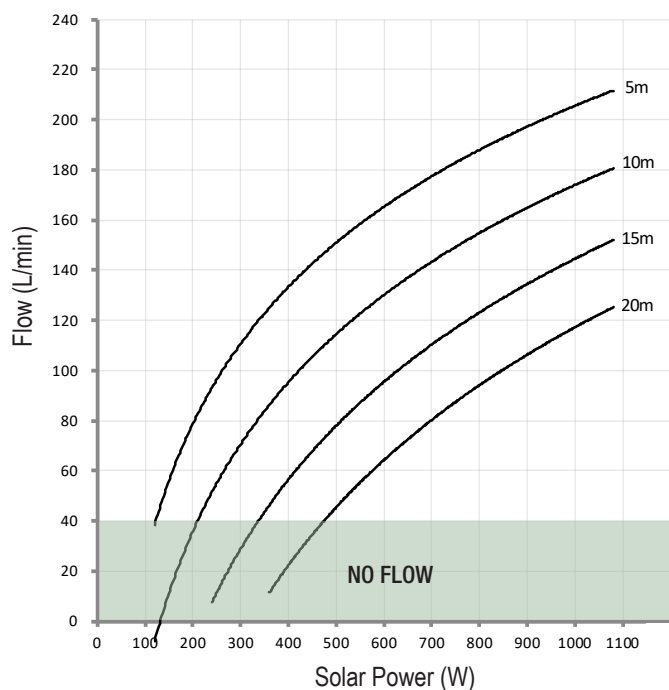


S4-8/6

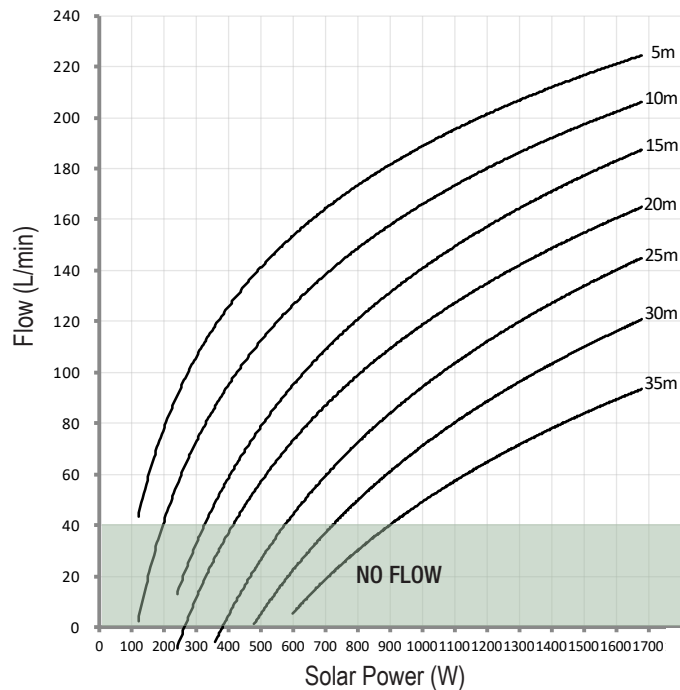

S4-8/8

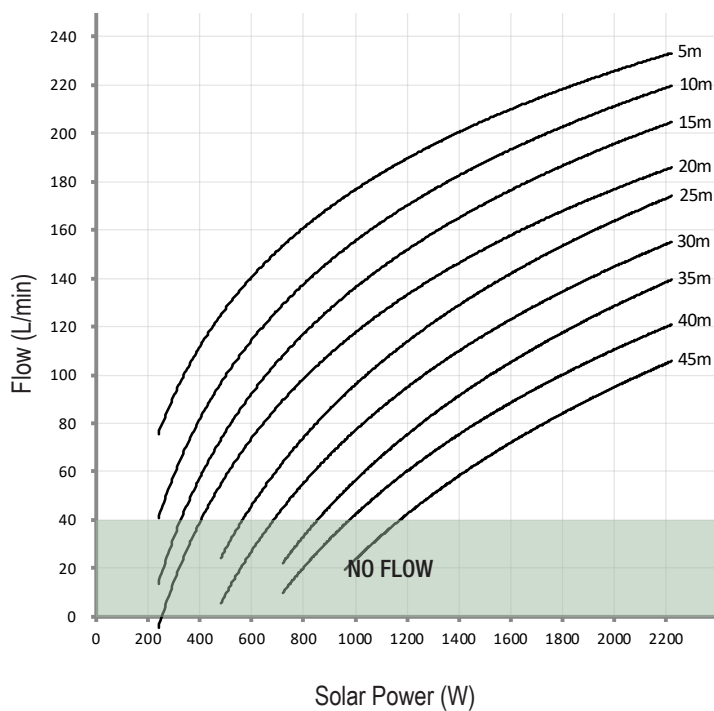


S4-8/13

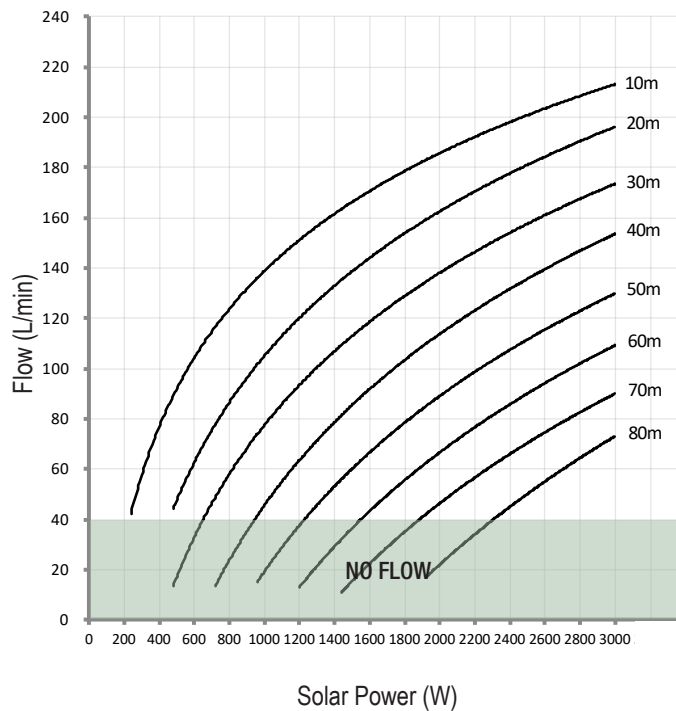


S4-12 SERIES


S4-12/5

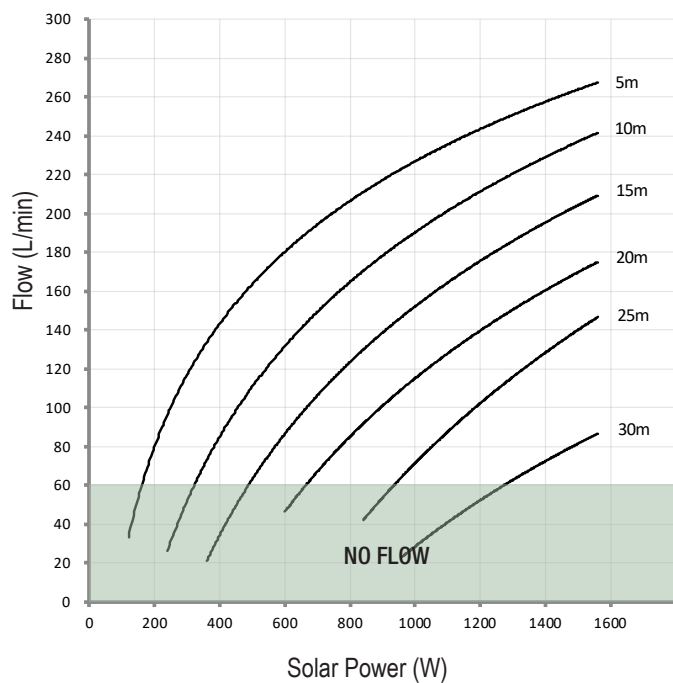

S4-12/8

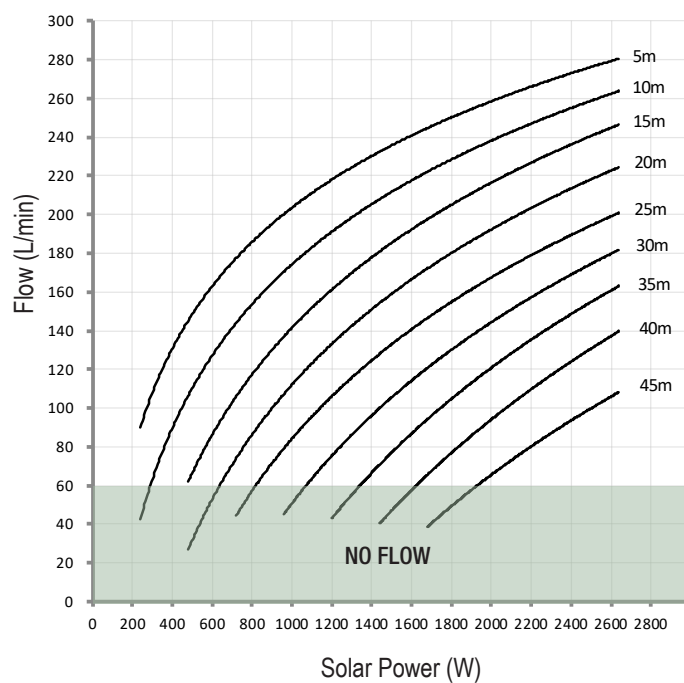


S4-12/11

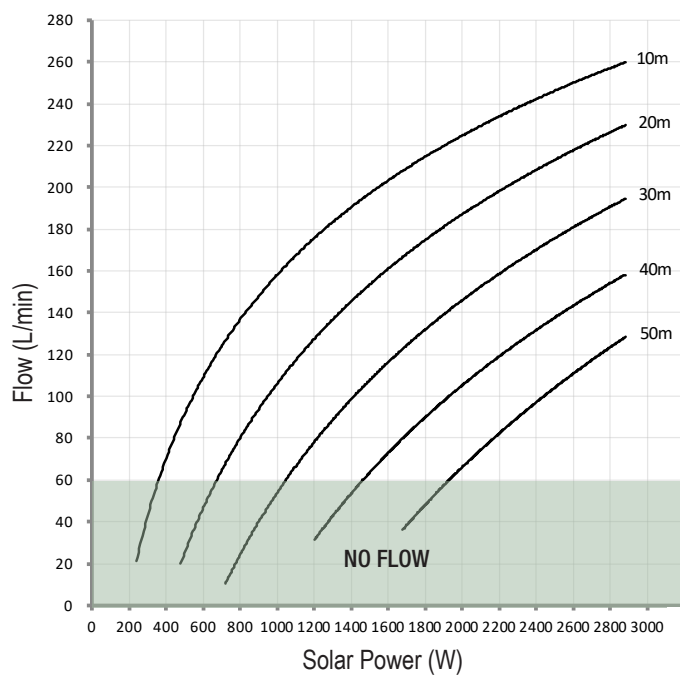


S4-16 SERIES

S4-16/5

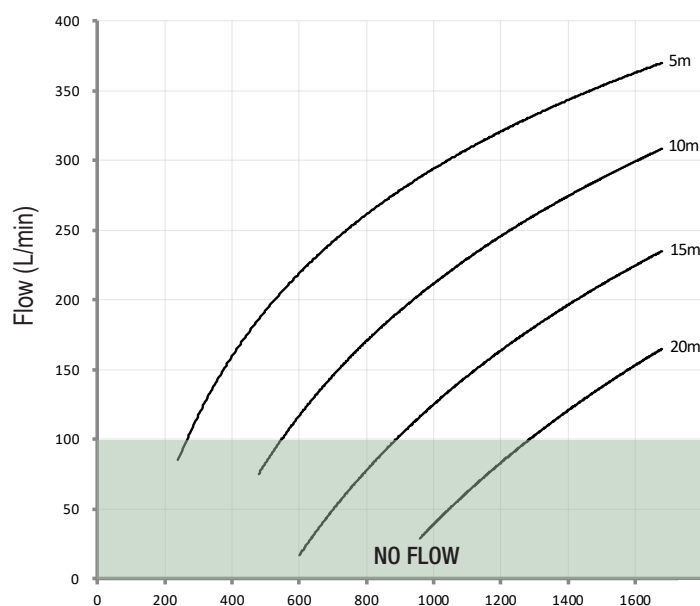

Solar Power (W)

S4-16/8

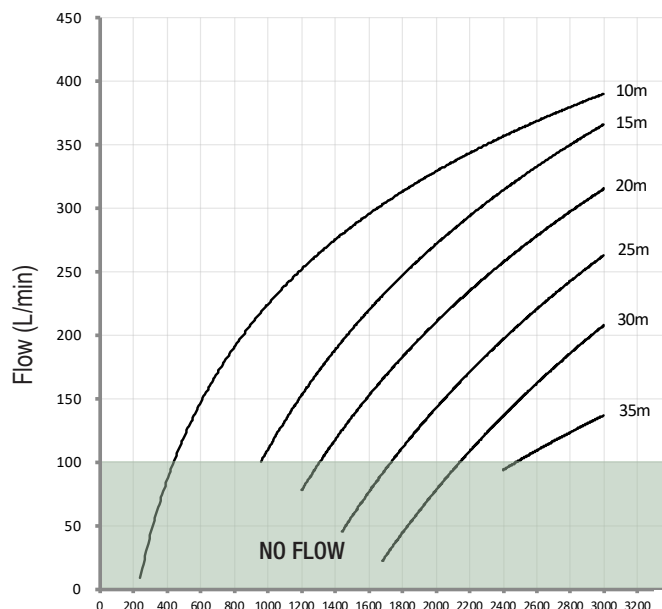

Solar Power (W)

NOTES

NOTES



DAB PUMPS LTD.

Unit 4 and 5, Stortford Hall Industrial Park,
Dunmow Road,
Bishops Stortford,
Herts
CM23 5GZ - UK
salesuk@dwtgroup.com
Tel. +44 1279 652 776
Fax +44 1279 657 727



DAB PUMPS B.V.

Brusselstraat 150
B-1702 Groot-Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353
Fax +32 2 4669218



DAB PUMPS B.V.

Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwtgroup.com
Tel. +31 416 387280
Fax +31 416 387299



DAB PUMPEN DEUTSCHLAND GmbH

Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwtgroup.com
Tel. +49 2151 82136-0
Fax +49 2151 82136-36



DAB PUMPS IBERICA S.L.

Avenida de Castilla nr.1 Local 14
28830 - San Fernando De Henares - Madrid
Spain
info.spain@dwtgroup.com
Tel. +34 91 6569545
Fax: +34 91 6569676



DAB PRODUCTION HUNGARY KFT.

H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS POLAND Sp. z o.o.

Mokotów Marynarska
ul. Postępu 15C
02-676 Warszawa - Poland
Tel. +48 223 81 6085



DAB UKRAINE Representative Office

Regus Horizon Park
4 M. Hrinchenka St, suit 147
03680 Kiev - Ukraine
Tel. +38 044 391 59 43



000 DWT GROUP

Novgorodskaya str, 1, bld G, office 308
127576 Moscow - Russia
info.russia@dwtgroup.com
Tel. +7 495 122 00 35
Fax +7 495 122 00 36



DAB PUMPS INC.

3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1-843-824-6332
Toll Free 1-866-896-4DAB (4322)
Fax 1-843-797-3366



DAB PUMPS SOUTH AFRICA

Twenty One Industrial Estate
16 Purlin Street, Warehouse 4,
Unit B, Olifantsfontein,
South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997
Fax +27 12 361 3137



DAB PUMPS CHINA

No.40 Kaituo Road, Qingdao Economic & Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
info.china@dwtgroup.com
Tel. +8653286812030-6270
Fax +8653286812210



DAB PUMPS DE MÉXICO, S.A. DE C.V.

Av Gral Álvaro Obregón 270, oficina 355
Hipódromo, Cuauhtémoc 06100
México, D.F.
Tel. +52 55 6719 0493