

# esybox DIVER

7" ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS WITH INVERTER






## PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm<sup>2</sup>/s and density equivalent to 1000 kg/m<sup>3</sup>. Curve tolerance according to ISO 9906.

### GRAPHIC SELECTION TABLE

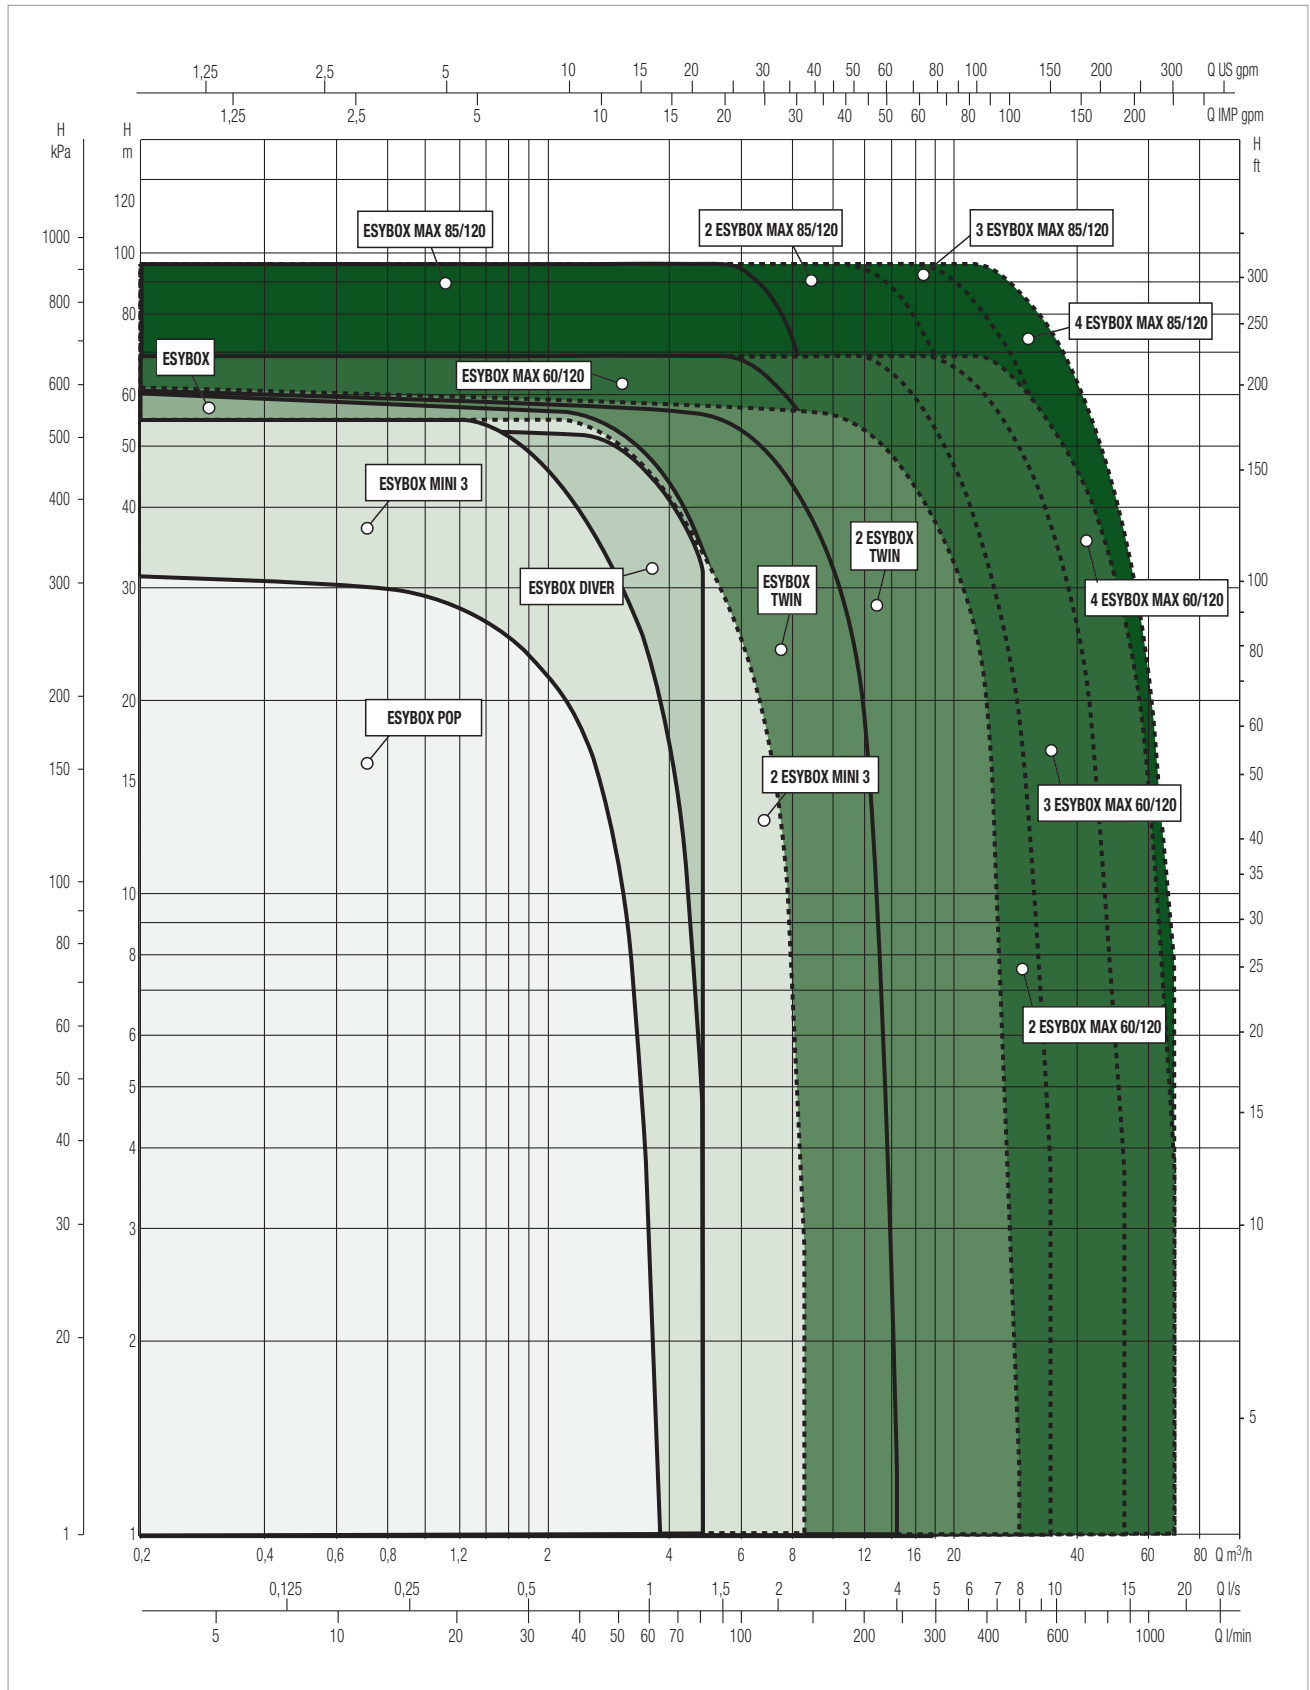

# ESYBOX DIVER

## 7" ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS WITH INVERTER



### TECHNICAL DATA

**Flow rate maximum:** 7,2 m<sup>3</sup>/h

**Head up to:** 55 m

**Maximum immersion depth:** 12 m standard version

**Type of pumped liquid:** Water Clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral

**Free passage:** 2 mm

**Minimum suction depth:** 110 mm

**Minimum level of water:** 35 mm

**Liquid temperature range:** from 0°C to +50°C

**Minimum and maximum ambient temperature:** <0°C / +50°C

**Maximum immersion depth:** 15 m

**Adjustable constant pressure:** pre-set 3 bar, adjustable from 1 to 5,5 bar

**Outlet connection:** Threated 1" 1/4

**Pump maximum diameter:** 185 mm

**Set cut-in:** 2,4 bar (+- 0,2)

**Impeller/s material:**

Technopolymer with ring impeller in AISI 304 stainless steel

**Maximum number of starts:** 60/h

**Protection class:** IP 68

**Non-stop service:** yes

**Motor insulation class:** F

**Power cable (m) and plug:** 15 m with plug

**Single phase power input:** 230 V 50 Hz / 60 Hz

**Possible type of installation:** Fixed, horizontal or vertical. Submerged or semi-submerged. It can be installed on the surface, with positive suction, in a vertical position with the DOC68 accessory (supplied separately).

**Special versions on request:**

X version with suction kit for suction at a higher level.

Version for drinking water WRAS, ACS, NSF.

Surface version (the DOC68 accessory is required).

**Certification:**

WRAS, ACS, NSF (only model for drinking water) are pending approval.

7" multi-stage electronic pump with variable speed drive for clean water designed for use in wells, cisterns or tanks. The pump can be used submerged, partially submerged or on the surface (with the appropriate accessory). It is suitable for pressurization, reuse of rainwater, gardening activities and irrigation in residential building service. The pump can also be installed horizontally. Equipped with PLC (PowerLine Communication) and Wi-Fi technology. DConnect Box 2 supplied as standard. There is an X version with 1" union and kit X which includes 1 meter suction pipe and float to prevent the suction of impurities from the bottom. The entire pump is IP 68 certified. With the DOC68 accessory (supplied separately) the pump becomes an IP 68 surface pump to be used in positive suction. Certified version for drinking water available on request.

### CONSTRUCTION FEATURES OF THE PUMP

Technopolymer pump body to resist corrosion and oxidation. Integrated non-return valve. Integrated debris filter. Overpressure valve, in case of completely submerged installation, with the freezing of the water in the external pipes, the valve prevents the damage to the pump. On the pump body there is an air-vent valve that improves priming during the first installation or in the event of emptying the tank/well, and a stainless steel handle to move the pump. Integrated 0,04 liter expansion vessel sized to prevent the pump from cycling in the event of small leaks and to compensate for water hammer. No maintenance or recharging is required. The coupling between the three impellers in technopolymer, the floating ring and the smoothing disc both in stainless steel allow a limited wear of the hydraulics and a more precise alignment of the components. Suction height can be adjusted using the appropriate accessory (included): 3,5, 4, 6 or 8 cm.

### CONSTRUCTION FEATURES OF THE MOTOR

High efficiency permanent magnet submersible motor cooled by the pumped liquid. hydraulic side of the motor shaft in AISI 303 stainless steel. Double mechanical seal in oil chamber where the seal on the motor side is subjected only to submersible pressure (1 bar), while the other side is subjected to operating pressure (up to 5,5 bar) ensuring that the pump is watertight. Electronically protected motor. Quick coupling/release cable to facilitate installation inside tanks or cisterns. Tear-off power cable connection.

### FEATURES OF THE ELECTRONIC

The electronic operation allows the pump to start and stop autonomously Variable speed drive for operation according to the system requirements. Working pressure adjustable from 1 to 5,5 bar and protects against dry running. NFC (Near Field Communication) pocket for the use of a float sensor (supplied separately) which can be connected without opening the pump maintaining a watertight seal. Thanks to the PLC communication technology, the pump transmits data through the power cable to the DConnect Box 2.

### DCONNECT BOX 2

Thanks to the DConnect Box 2 and the H<sub>2</sub>D service it is possible to check and manage the system pressure, alarms and the amount of residual water in the tank directly from your smartphone or tablet. DConnect Box 2 supplied as standard.

# ESYBOX DIVER

## 7" ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS WITH INVERTER



### PERFORMANCE AT 50 HZ

MODEL	HYDRAULIC DATA													
	Q=m³/h	0	0,6	1,2	1,8	2,4	3	3,6	4,2	4,8	5,4	6	6,6	7,2
	Q=l/min	0	10	20	30	40	50	60	70	80	90	100	110	120
ESYBOX DIVER	H (m)	55	55	55	55	55	55	53	44	34	26	17	7,5	
ESYBOX DIVER X		55	55	55	55	55	55	53	44	34	26	17	7,5	
ESYBOX DIVER + DOC 68		55	55	55	55	55	55	53	44	34	26	17	7,5	

### ELECTRICAL DATA AND DIMENSIONS

MODEL	ELECTRICAL DATA					A	B	H	Ø DNM	DNA	PACKING DIMENSIONS			PACKING VOLUME m³	Q.TY X PALLET	WEIGHT kg
	POWER INPUT 50 Hz	P1 kW	P2 NOMINAL		In A						L/A	L/B	H			
			kW	HP												
ESYBOX DIVER	1 x 220-240 V ~	1,3	0,95	1,3	5,5	185	-	651	1" 1/4	-	740	230	300	0,05106	15	17
ESYBOX DIVER X	1 x 220-240 V ~	1,3	0,95	1,3	5,5	195	32	676	1" 1/4	1"	780	230	300	0,0538	15	17
ESYBOX DIVER + DOC 68	1 x 220-240 V ~	1,3	0,95	1,3	5,5	235	92	658	1" 1/4	1" 1/4	382*	306*	178*	0,0208*	30*	3*

\*Data referred to the DOC68 accessory only

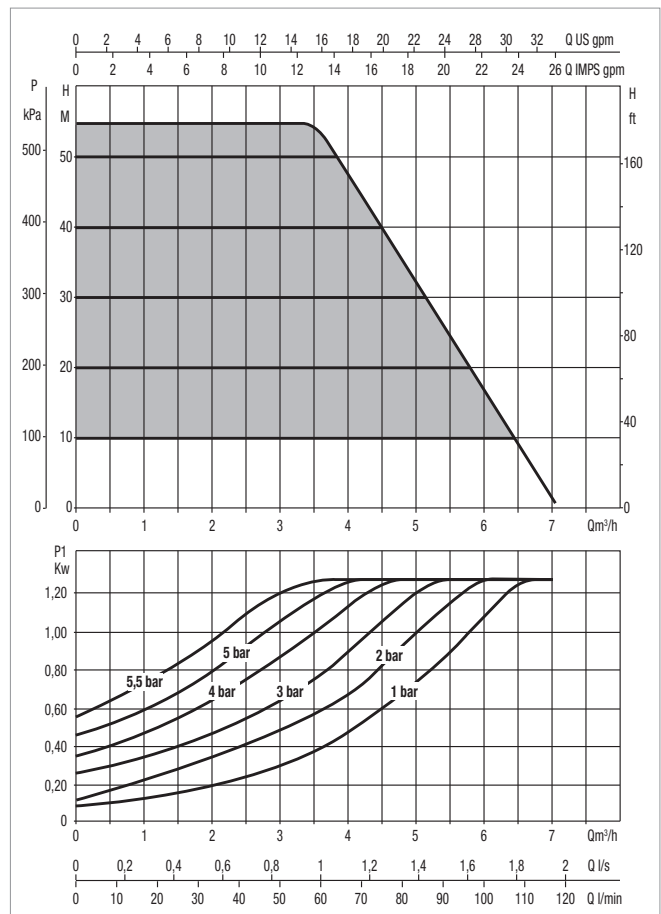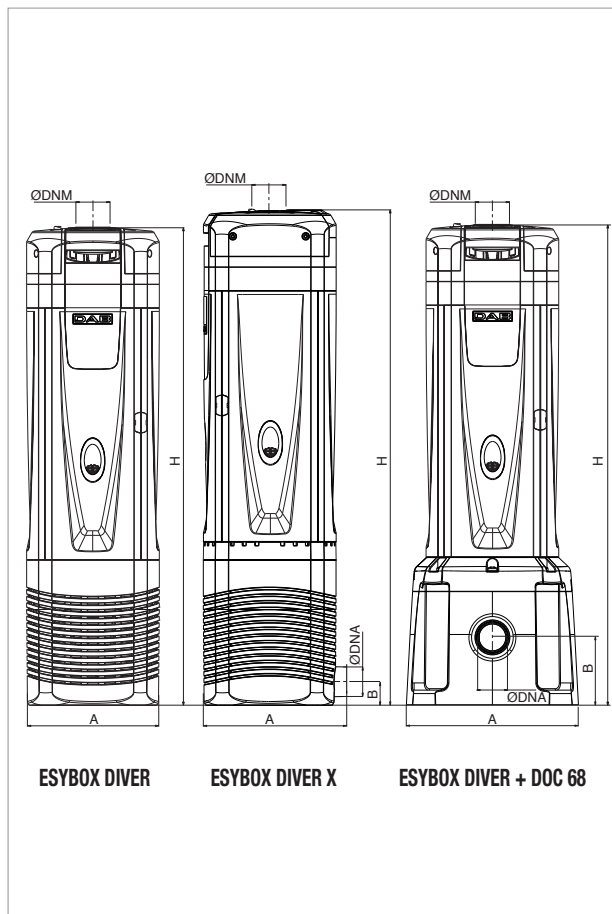

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equivalent to 1000 kg/m³. Curve tolerance according to ISO 9906.


# H<sub>2</sub>D DIGITAL SERVICE

THE SMART PLATFORM FOR MANAGING DAB DEVICES REMOTELY

**H<sub>2</sub>D IS THE DAB PLATFORM - AVAILABLE ON MOBILE AND DESKTOP - THAT PAIRS WITH LATEST-GENERATION DAB DEVICES TO SHOW YOU WHAT'S GOING ON INSIDE YOUR SYSTEMS.**

It allows you to configure your pump and optimise its operation remotely, saving time, resources and money.

Ideal for anyone seeking to future-proof their business with solutions designed to improve processes, offer more service, and be environmentally responsible.

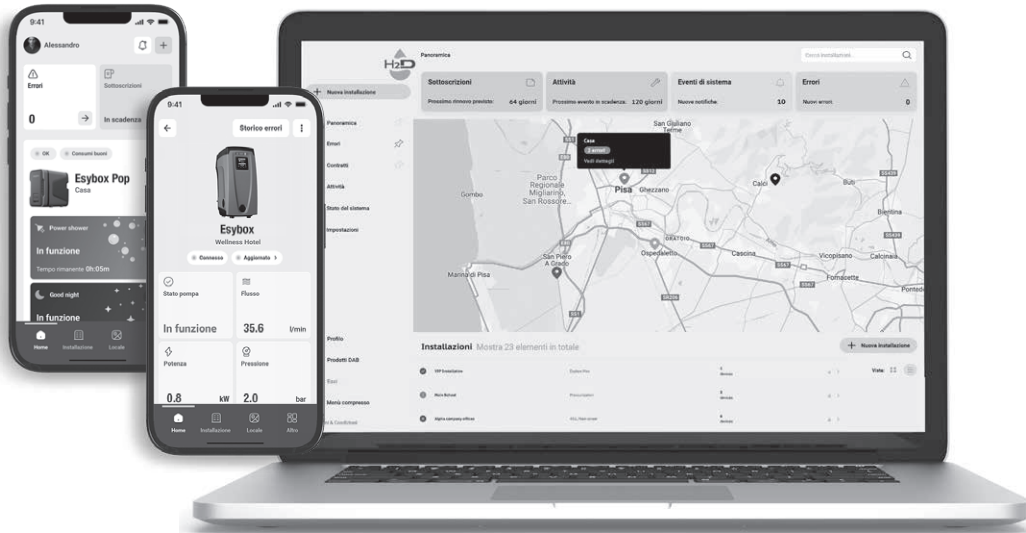

## H<sub>2</sub>D FOR PROFESSIONALS

H<sub>2</sub>D simplifies and streamlines work routines, allowing for precise configuration of all parameters.

## SEE THE FUTURE OF YOUR BUSINESS THROUGH A NEW LENS

Desktop and mobile solutions work together seamlessly. With user-friendly access on your smartphone, it's never been easier to communicate with pumps on site or keep an eye on your systems from anywhere. From your desktop, you can dive deeper into data analysis. You can easily enhance workflow, improve customer service, and grow your business.



### OPTIMISE TIME AND WORK

H<sub>2</sub>D allows systems to be controlled remotely and, where needed, work on site is easier to plan.



### PROBLEM FIXED FIRST TIME, EVERY TIME

H<sub>2</sub>D provides all the info you need to prepare the job beforehand for a quick and permanent fix, so the technician can get everything done in one go.



### LITTLE OR NO DISRUPTION

Remote monitoring allows you to address potential issues and prevent disruptions.



### MORE SERVICE AND LESS URGENT CALLOUTS = INCREASED PROFIT

With remote monitoring, we offer a 24/7 service that includes preventive maintenance services, helping to avoid emergencies.




### SATISFIED CUSTOMERS

With parameters optimised remotely, the system ensures consistently smooth operation.



### FROM DCONNECT TO H<sub>2</sub>D

H<sub>2</sub>D replaces and improves on DConnect. Latest generation DAB products connect effortlessly to H<sub>2</sub>D.

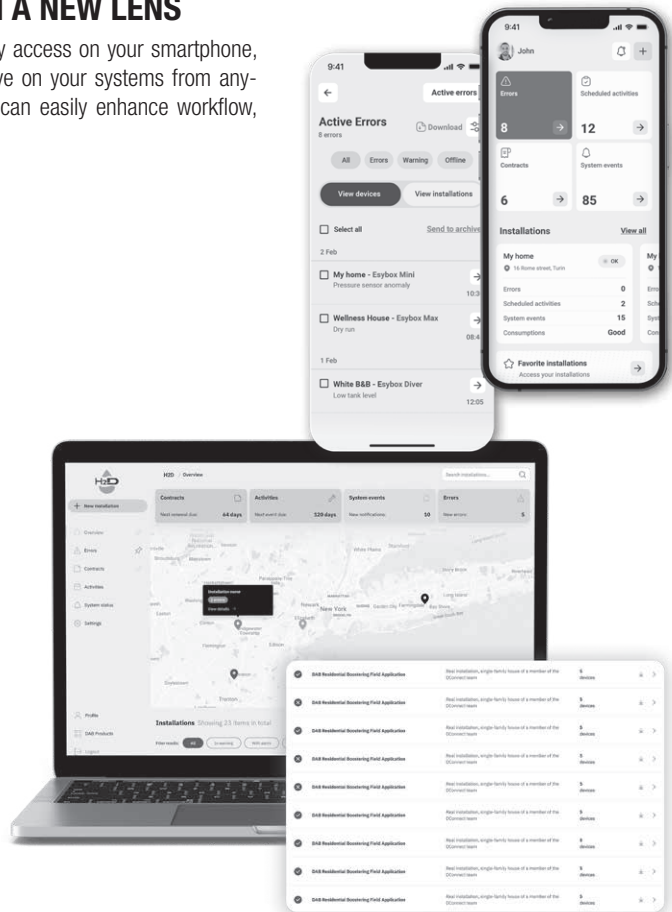

# H<sub>2</sub>D DIGITAL SERVICE

## THE SMART PLATFORM FOR MANAGING DAB DEVICES REMOTELY



### H<sub>2</sub>D FOR HOMEOWNERS AND END USERS

H<sub>2</sub>D is a tool designed to help you manage water use effectively, optimising consumption, costs, and comfort.



#### OVERVIEW

With H<sub>2</sub>D monitoring your water usage and device status in real-time is easy and convenient. If any issues arise, you can contact support immediately, regardless of your location.




#### SMART HOME. TALK TO YOUR ESYBOX!

You can activate comfort modes by speaking to voice assistants like Alexa and Google Home. For example, you can say, "Alexa, activate Power Shower."

## COMFORT FUNCTIONS

You can access these functions through an app, allowing you to customise the system's performance and features to balance comfort and energy consumption.

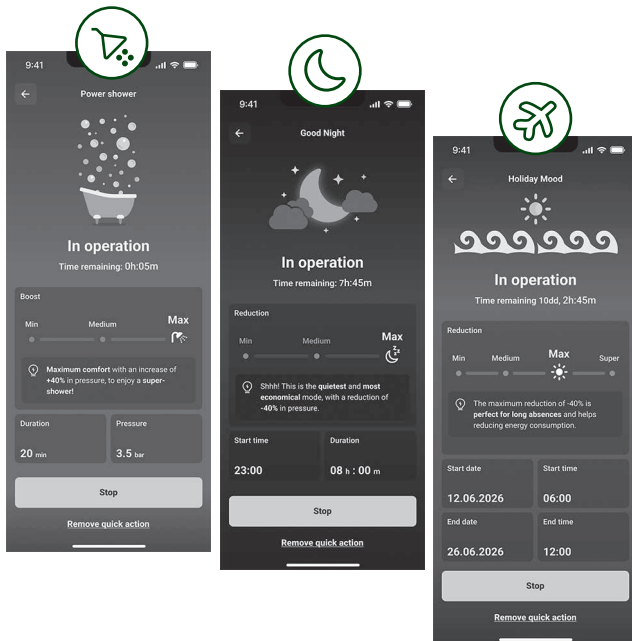

#### POWER SHOWER

Turn a regular shower into a "power shower": this feature increases water pressure just for the time it takes to shower, while reducing usage for the rest of the day.



#### GOOD NIGHT

During the night or for a quick nap, you can activate sleep mode, which switches the already quiet pump to a whisper-quiet operation, further reducing energy usage.



#### HOLIDAY MOOD (Only for Esybox Pop)

This important feature helps minimise device activity, thereby saving energy during vacations or extended periods when you are away.

INSTALL H<sub>2</sub>D NOW!



LEARN MORE  
H2D.COM/EN





HOW TO USE H<sub>2</sub>D




# ACCESSORIES

## ESYBOX DIVER

	DESCRIPTION
	<p><b>NFC LEVEL SENSOR</b></p> <p>Connected to the DConnect Box 2, it monitors the water level in the tank and communicates it to the user via the app.</p>

	DESCRIPTION
	<p><b>NFC FLOAT</b></p> <p>Detects the water level in the tank, preventing the tank from being emptied and the pump from running dry due to too low a water level.</p>

	<p><b>SUCTION KIT FOR X VERSION</b></p> <p>Combined with the X version, it allows water to be drawn up to a level that prevents the pumping of dust and sludge from the bottom of pits and tanks.</p>
---	---

	<p><b>DOC68</b></p> <p>ConWith DOC68, EsyBox Diver can also be installed outdoors as a surface pump. IP68-certified.</p>
---	--







**DAB**  
PUMPS SELECTOR

On-line selection tool



**DAB PUMPS LTD.**  
Unit 6 Gilberd Court  
Newcomen Way, Severalls Park  
CO4 9WN  
Colchester  
ordersuk@dwtgroup.com  
Tel. +44 0333 777 5010



**DAB PUMPS IBERICA S.L.**  
Calle Verano 18-20-22  
28850 - Torrejón de Ardoz - Madrid  
Spain  
Info.spain@dwtgroup.com  
Tel. +34 91 6569545



**DAB PUMPS DE MÉXICO, S.A. DE C.V.**  
Av Amsterdam 101 Local 4  
Col. Hipódromo Condesa,  
Del. Cuauhtémoc CP 06170  
Ciudad de México  
Tel. +52 55 553 2621



**DAB PUMPS BV**  
'tHofveld 6 C1  
1702 Groot Bijgaarden - Belgium  
info.belgium@dwtgroup.com  
Tel. +32 2 4668353



**DAB PUMPS HUNGARY KFT.**  
H-8800  
Nagykanizsa, Buda Ernő u.5  
Hungary  
Tel. +36 93501700



**DAB PUMPS SOUTH AFRICA (PTY) LTD**  
Twenty One industrial Estate,  
16 Purlin Street, Unit B, Warehouse 4  
Olifantsfontein -1667 - South Africa  
info.sa@dwtgroup.com  
Tel. +27 12 361 3997



**DAB PUMPS B.V.**  
Statenlaan, 4  
5223 LA, 's-Hertogenbosch  
Nederland  
info.nl@dabpumps.com  
Tel. +31 416 387280



**DAB PUMPS POLAND Sp. z o.o.**  
Ul. Cieslewskich 35K  
03-017 Warszawa - Poland  
sprzedaz@dabpumps.com.pl



**DAB PUMPS (QINGDAO) CO. LTD.**  
No.10 Xindong Road  
Jiulong Town,  
Jiaozhou City  
266319 Qingdao (Shandong) - China  
sales.cn@dwtgroup.com  
Tel. +86 400 186 8280



**DAB PUMPS FRANCE SAS**  
Tour Ariane, Paris la Défense 9  
5, Place de la Pyramide  
92800 Puteaux - France  
info.fr@dabpumps.com  
Tel. +33 (0)6 79 63 05 46  
+33 (0)7 89 01 53 35



**DAB PUMPS INC.**  
3226 Benchmark Drive  
Ladson, SC 29456 - USA  
info.usa@dwtgroup.com  
Tel. 1- 843-797-5002  
Fax 1-843-797-3366



**DAB PUMPS OCEANIA PTY LTD**  
426 South Gippsland Highway,  
Dandenong South VIC 3175 - Australia  
info.oceania@dwtgroup.com  
Tel. +61 1300 378 677



**DAB PUMPS GMBH**  
Am Nordpark 3  
D - 41069 Mönchengladbach - Germany  
info.germany@dwtgroup.com  
Tel. +49 2161 47388-0  
Fax +49 2161 47388-36



**DAB PUMPS CANADA INC.**  
333 Bay Street, Suite 4600, Toronto,  
Ontario, M5H 2S5, - Canada  
orders@dwtgroup.ca  
Tel. 1-833-322-7867



**PT DAB PUMPS INDONESIA**  
Satrio Tower lantai 26  
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,  
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.  
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia  
Tel. +62 2129222850