



MAKING WATER EASY

EVOSTA 2 EVOSTA 3

ELECTRONIC CIRCULATORS
FOR HEATING AND COOLING SYSTEMS



EVOSTA 2

WET ROTOR ELECTRONIC CIRCULATORS



in line with European Directive
ErP 2009/125/EC (formerly EuP) of 2015



ANTI-CLOGGING TECHNOLOGY
Limescale resistant even after
long downtimes

TECHNICAL DATA

Operating range: 0,4-3,6 m³/h with head up to 6,9 metres.

Pumped liquid temperature range: from -10 °C to +110°C

Working pressure: 10 bar (1000 kPa)

Protection class: IPX5

Insulation class: F

Installation: with horizontal motor axis

Standard power input: single-phase 1x230 V~ 50/60 Hz

Pumped liquid clean, free of solids and mineral oils, non-viscous, chemically neutral, with properties similar to water (glycol max 50%).

APPLICATIONS

Low energy consumption electronic pump for water circulation in all types of domestic heating and cooling systems.

ADVANTAGES

The new range of **EVOSTA 2** circulators by DAB combines the strength of a mechanical circulator with the benefits of the electronic circulator.

Thanks to the permanent magnet synchronous motor, the frequency converter and the energy efficiency of $EEL \leq 0.18$, as well as the protection class IPX5 and the integrated bleeding plug, the **EVOSTA 2** family ranks as one of the best products in the category in terms of performance and reliability. The range of **EVOSTA 2** circulators is the perfect replacement for old three-speed circulators due to its compact size and all-round performance. The product is also extremely user-friendly, with a single button for sequential setting and direct access to the motor shaft for unlocking it when necessary.

CONSTRUCTION FEATURES

Cast iron pump body with cathaphoresis paint coating and wet rotor motor. Steel motor casing, technopolymer impeller. Ceramic motor shaft on ceramic bushings lubricated by the pumped liquid. Stainless steel rotor liner, stator liner and closing flange. Graphite thrust ring.

EPDM seal ring and brass bleeding plug.

Thanks to the internal protection of the motor, the pump does not require any overload protection.

CONTROL PANEL


The settings of the **EVOSTA 2**, **EVOSTA 3** circulators can be modified in the control panel on the fascia of the pump device. The pumps have nine settings that can be selected scrolling the **MODE** button. Three LED lights on the fascia show the current setting.

EVOSTA 3 circulator has a display showing the following data:


- Head of the selected curve
- Instantaneous power consumption in Watt.
- Instantaneous head in m
- Instantaneous flow rate in m³/h

MATERIALS

| N. | PARTS | MATERIALS |
|----|------------------|----------------------------------|
| 1 | ROTOR CAN FLANGE | AISI 316 |
| 2 | IMPELLER | ULTRASON |
| 3 | SHAFT | ALUMINA |
| 4 | ROTOR | Fe |
| 5 | BEARING HOUSING | BRASS |
| 6 | BEARING | ALUMINA |
| 7 | AXIAL BEARING | GRAPHITE |
| 8 | AXIAL HOUSING | EPDM |
| 9 | PLUG | BRASS |
| 10 | O-ring | EPDM |
| 11 | STATOR HOUSING | AISI 304 |
| 12 | ENCLOUSER SHELL | POLYCARBONATE |
| 13 | ENCLOUSER | POLYCARBONATE |
| 14 | ROTOR SLEEV | AISI 304 |
| 15 | SEAL | EPDM |
| 16 | PUMP HOUSING | CAST IRON - BRONZE (SAN VERSION) |
| 17 | NECK RING | AISI 304 |
| 18 | CONNECTOR | POLYCARBONATE |

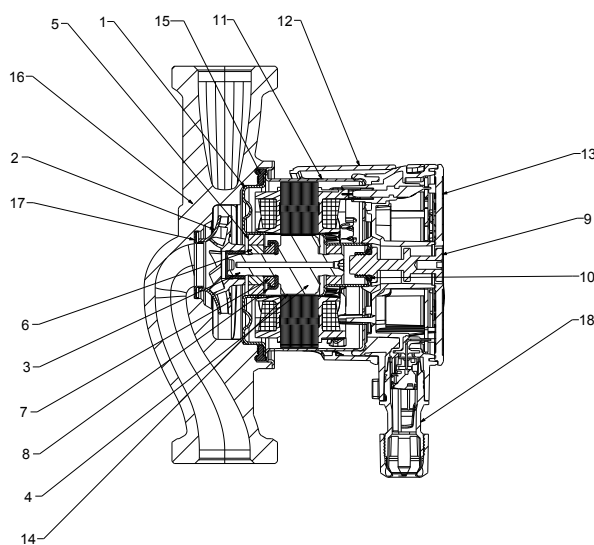

REGULATION MODE

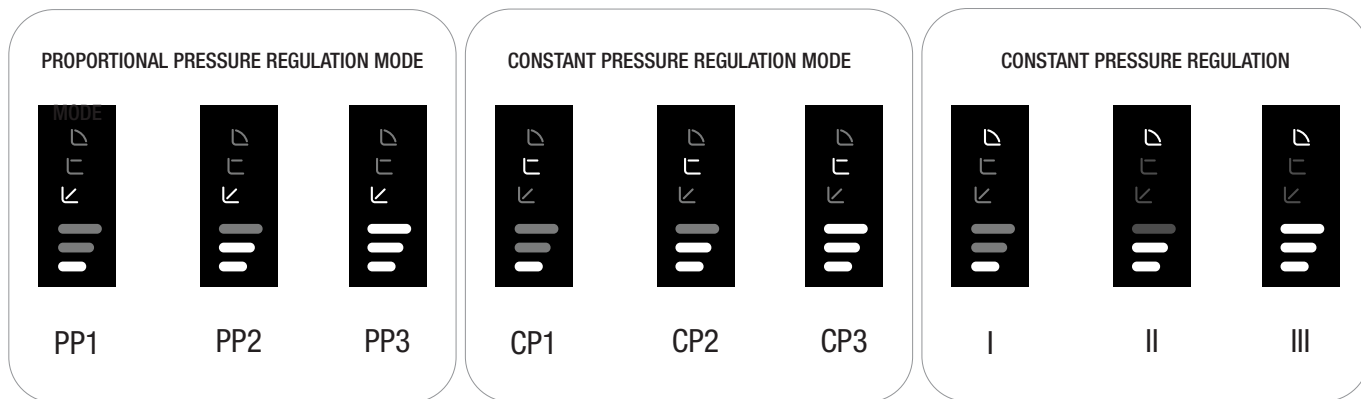

Model Number (example)

EVOSTA 40/70 / 130 X

Threaded connections electronic circulator

Maximum head range (dm)

Centre distance (mm)



Standard (no ref.) = 1" 1/2 threaded connections

1/2" = 1" threaded connections

X = 2" threaded connections

EVOSTA 2 - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from -10 °C to +110 °C - Maximum operating pressure: 10 bar (1000 kPa)

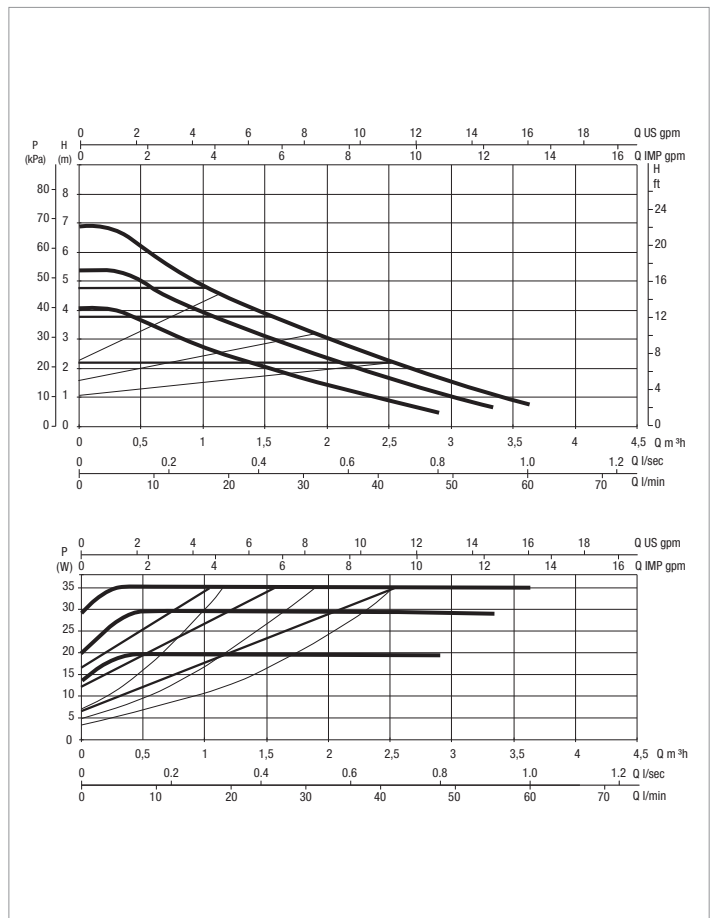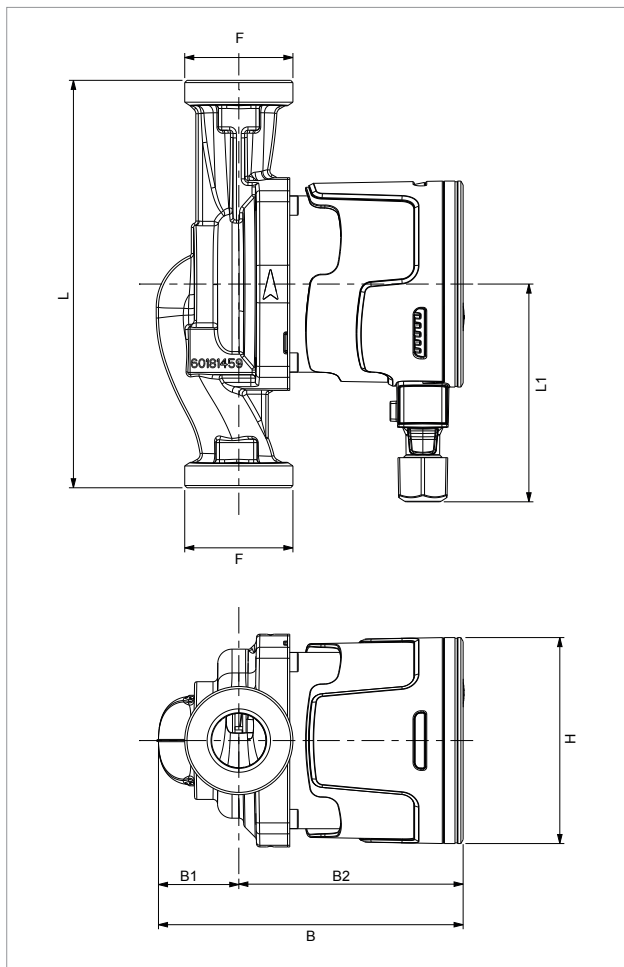

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

| MODEL | Q=m³h | 0,0 | 0,3 | 0,6 | 0,9 | 1,8 | 2,4 | 3,0 | 3,6 |
|---------------------------|----------|-----|-----|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 5 | 10 | 15 | 30 | 40 | 50 | 60 |
| EVOSTA 2 40-70/130 1" | H (m) | 6,9 | 6,9 | 5,8 | 5,1 | 3,4 | 2,4 | 1,6 | 0,8 |
| EVOSTA 2 40-70/130 1/2" | | 6,9 | 6,9 | 5,8 | 5,1 | 3,4 | 2,4 | 1,6 | 0,8 |
| EVOSTA 2 40-70/180 1" | | 6,9 | 6,9 | 5,8 | 5,1 | 3,4 | 2,4 | 1,6 | 0,8 |
| EVOSTA 2 40-70/180X 1"1/4 | | 6,9 | 6,9 | 5,8 | 5,1 | 3,4 | 2,4 | 1,6 | 0,8 |

| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | EEI* | MINIMUM SUCTION PRESSURE | |
|---------------------------|-----------------------|-------------------------|----------------------|-------------|--------------|--------|--------------------------|------|
| | | | | | | | t° | 90 ° |
| EVOSTA 2 40-70/130 1" | 130 | DN25 FILETTATO (G 1" ½) | 1x230 V ~ | 35 | 0,043 - 0,32 | ≤ 0,18 | m.c.a. | 10 |
| EVOSTA 2 40-70/130 1/2" | 130 | DN15 FILETTATO (G 1") | 1x230 V ~ | 35 | 0,043 - 0,32 | ≤ 0,18 | m.c.a. | 10 |
| EVOSTA 2 40-70/180 1" | 180 | DN25 FILETTATO (G 1" ½) | 1x230 V ~ | 35 | 0,043 - 0,32 | ≤ 0,18 | m.c.a. | 10 |
| EVOSTA 2 40-70/180X 1"1/4 | 180 | DN32 FILETTATO (G 2") | 1x230 V ~ | 35 | 0,043 - 0,32 | ≤ 0,18 | m.c.a. | 10 |

The parameter of reference for the more efficient circulators is EEI ≤ 0,18


| MODEL | L | L1 | B | B1 | B2 | H | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|---------------------------|-----|----|-------|------|------|----|------|--------------------|----|-----|--------------|--------------|
| | | | | | | | | L | B | H | | |
| EVOSTA 2 40-70/130 1" | 130 | 65 | 134.6 | 35.5 | 99.1 | 91 | 1" ½ | 142 | 99 | 150 | 0,0021 | 2,02 |
| EVOSTA 2 40-70/130 1/2" | 130 | 65 | 134.6 | 35.5 | 99.1 | 91 | 1" | 142 | 99 | 150 | 0,0021 | 1,86 |
| EVOSTA 2 40-70/180 1" | 180 | 90 | 134.6 | 35.5 | 99.1 | 91 | 1" ½ | 192 | 99 | 150 | 0,0028 | 2,19 |
| EVOSTA 2 40-70/180X 1"1/4 | 180 | 90 | 134.6 | 35.5 | 99.1 | 91 | 2" | 192 | 99 | 150 | 0,0028 | 2,35 |

EVOSTA 3

WET ROTOR ELECTRONIC CIRCULATORS



in line with European Directive
ErP 2009/125/EC (formerly EuP) of 2015



TECHNICAL DATA

Operating range: 0,4-4,2 m³/h with head up to 8+ metres.

Pumped liquid temperature range: from -10 °C to +110°C

Working pressure: 10 bar (1000 kPa)

Protection class: IPX5

Insulation class: F

Installation: with horizontal motor axis.

Standard power input: single-phase 1x230 V~ 50/60 Hz

Pumped liquid clean, free of solids and mineral oils, non-viscous, chemically neutral, with properties similar to water (glycol max 50%).

APPLICATIONS

Low energy consumption electronic pump for water circulation in all types of domestic heating and cooling systems.

ADVANTAGES

The new range of **EVOSTA 3** circulators by DAB combines the strength of a mechanical circulator with the benefits of the electronic circulator.

Thanks to the permanent magnet synchronous motor, the frequency converter and the energy efficiency of $EEL \leq 0.19$, as well as the protection class IPX5 and the integrated bleeding plug, the **EVOSTA 3** family ranks as one of the best products in the category in terms of performance and reliability. The range of **EVOSTA 3** circulators is the perfect replacement for old three-speed circulators due to its compact size and all-round performance. The product is also extremely user-friendly, with a single button for sequential setting and direct access to the motor shaft for unlocking it when necessary.

EVOSTA 3 version has a display showing the instantaneous flow rate, the instantaneous head and the instantaneous power consumption in Watts.

EVOSTA 3 version also offers the new function of automatic degassing.

CONSTRUCTION FEATURES

Cast iron pump body with cathodolysis paint coating and wet rotor motor. Steel motor casing, technopolymer impeller. Ceramic motor shaft on ceramic bushings lubricated by the pumped liquid. Stainless steel rotor liner, stator liner and closing flange. Graphite thrust ring.

EPDM seal ring and brass bleeding plug.

Thanks to the internal protection of the motor, the pump does not require any overload protection.

CONTROL PANEL

The settings of the **EVOSTA 2**, **EVOSTA 3** circulators can be modified in the control panel on the face of the pump device. The pumps have nine settings that can be selected scrolling the **MODE** button. Three LED lights on the face show the current setting.

EVOSTA 3 circulator has a display showing the following data:


- Head of the selected curve
- Instantaneous power consumption in Watts.
- Instantaneous head in m
- Instantaneous flow rate in m³/h

EVOSTA 3

WET ROTOR ELECTRONIC CIRCULATORS




MATERIALS
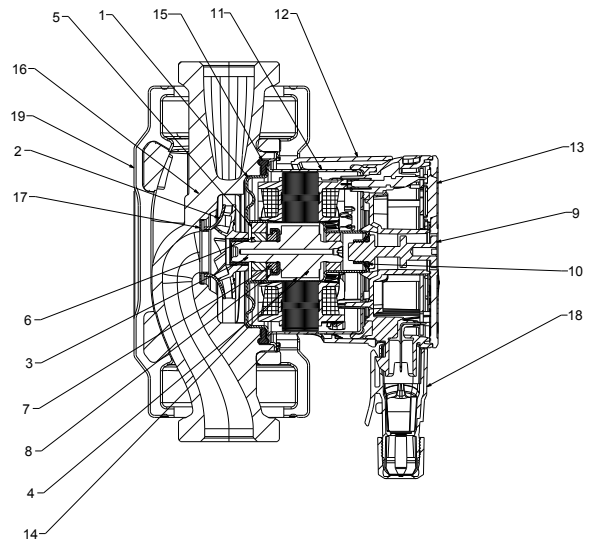
| N° | PARTS | MATERIALS |
|----|------------------|---------------|
| 1 | ROTOR CAN FLANGE | AISI 316 |
| 2 | IMPELLER | ULTRASON |
| 3 | SHAFT | ALUMINA |
| 4 | ROTOR | Fe |
| 5 | BEARING HOUSING | BRASS |
| 6 | BEARING | ALUMINA |
| 7 | AXIAL BEARING | GRAPHITE |
| 8 | AXIAL HOUSING | EPDM |
| 9 | PLUG | BRASS |
| 10 | O-ring | EPDM |
| 11 | STATOR HOUSING | AISI 304 |
| 12 | ENCLOUSER SHELL | POLYCARBONATE |
| 13 | ENCLOUSER | POLYCARBONATE |
| 14 | ROTOR SLEEVE | AISI 304 |
| 15 | SEAL | EPDM |
| 16 | PUMP HOUSING | CAST IRON |
| 17 | NECK RING | AISI 304 |
| 18 | CONNECTOR | POLYCARBONATE |
| 19 | INSULATION SHELL | PPE |






REGULATION MODES

PROPORTIONAL PRESSURE REGULATION MODE




PP1
PP2
PP3

FUNZIONAMENTO A PRESSIONE COSTANTE

CP1
CP2
CP3

FIXED CURVE REGULATION MODE

I
II
III

Model Number (example)

EVOSTA 80 / 130 X

Threaded connections electronic circulator _____

Maximum head range (dm) _____

Centre distance (mm) _____



½" = 1" threaded connections

Standard (no ref.) = 1" ½ threaded connections

X = 2" threaded connections

EVOSTA 3 - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from -10 °C to +110 °C - Maximum operating pressure: 10 bar (1000 kPa)

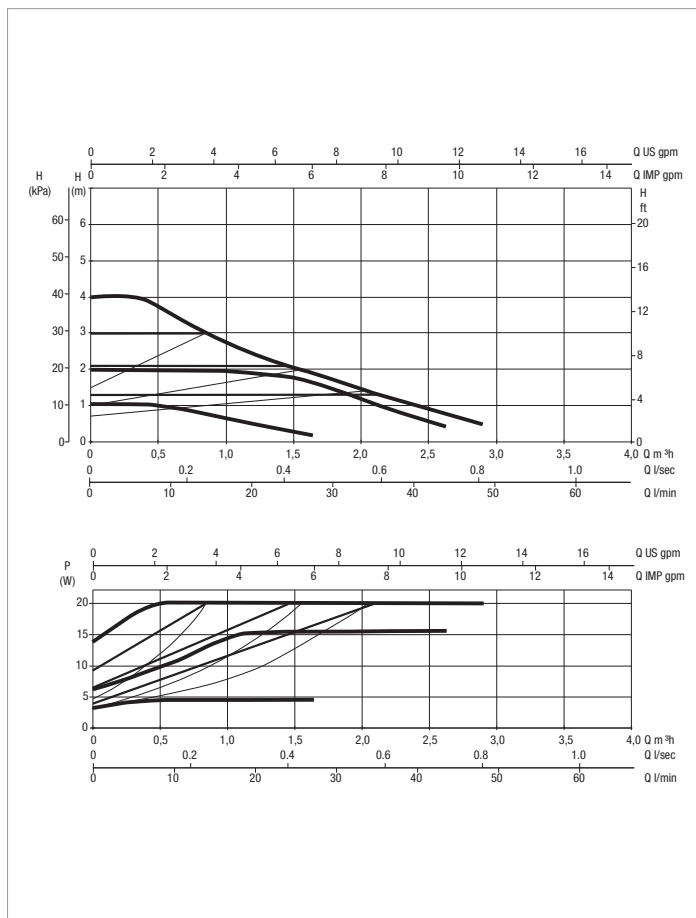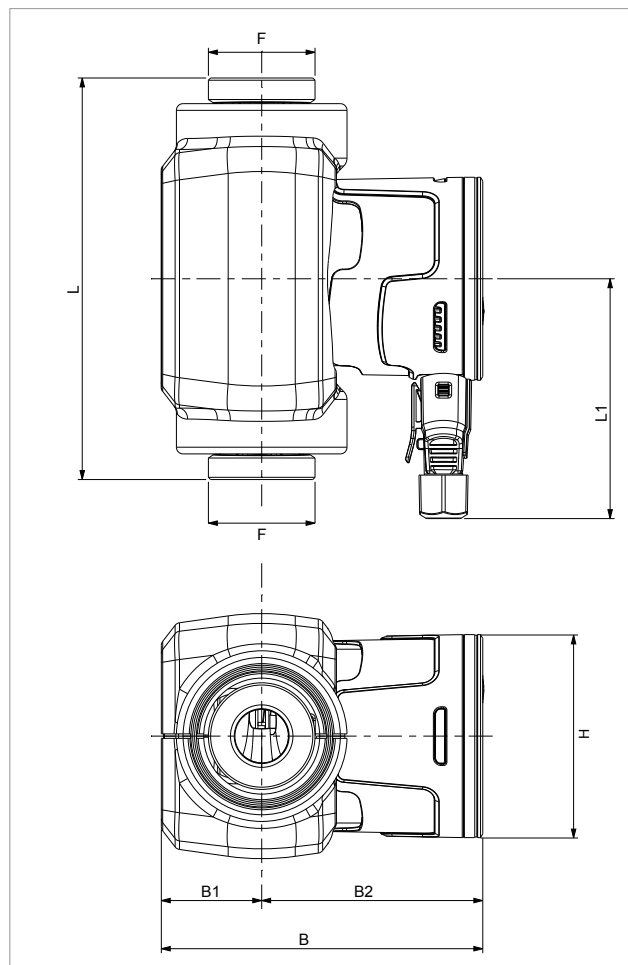

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

| MODEL | Q=m³h | 0 | 0,4 | 0,6 | 0,9 | 1,2 | 1,8 | 2,1 | 2,9 |
|--------------------------|----------|-----|-----|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 6 | 10 | 15 | 20 | 30 | 35 | 48 |
| EVOSTA 3 40/130 1" | H (m) | 4,0 | 4,0 | 3,5 | 2,9 | 2,5 | 1,7 | 1,3 | 0,5 |
| EVOSTA 3 40/130 1/2" | | 4,0 | 4,0 | 3,5 | 2,9 | 2,5 | 1,7 | 1,3 | 0,5 |
| EVOSTA 3 40/180 1" | | 4,0 | 4,0 | 3,5 | 2,9 | 2,5 | 1,7 | 1,3 | 0,5 |
| EVOSTA 3 40/180 X 1" 1/4 | | 4,0 | 4,0 | 3,5 | 2,9 | 2,5 | 1,7 | 1,3 | 0,5 |



| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | EEI * | MINIMUM SUCTION PRESSURE | |
|--------------------------|-----------------------|--------------------------|----------------------|-------------|--------------|--------|--------------------------|------|
| | | | | | | | t° | 90 ° |
| EVOSTA 3 40/130 1" | 130 | DN25 THREADED (G - 1" ½) | 1x230 V ~ | 20 | 0,034 - 0,18 | ≤ 0,17 | m.c.a. | 10 |
| EVOSTA 3 40/130 1/2" | 130 | DN15 THREADED (G - 1") | 1x230 V ~ | 20 | 0,034 - 0,18 | ≤ 0,17 | m.c.a. | 10 |
| EVOSTA 3 40/180 1" | 180 | DN25 THREADED (G - 1" ½) | 1x230 V ~ | 20 | 0,034 - 0,18 | ≤ 0,17 | m.c.a. | 10 |
| EVOSTA 3 40/180 X 1" 1/4 | 180 | DN32 THREADED (G - 2") | 1x230 V ~ | 20 | 0,034 - 0,18 | ≤ 0,17 | m.c.a. | 10 |

*The parameter of reference for the more efficient circulators is EEI ≤ 0,19

| MODEL | L | L1 | B | B1 | B2 | H | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|--------------------------|-----|-------|-------|----|------|----|------|--------------------|-------|-----|--------------|--------------|
| | | | | | | | | L | B | H | | |
| EVOSTA 3 40/130 1" | 130 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1" ½ | 192 | 113,5 | 155 | 0,0034 | 2,05 |
| EVOSTA 3 40/130 1/2" | 130 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1 | 192 | 113,5 | 155 | 0,0034 | 1,9 |
| EVOSTA 3 40/180 1" | 180 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1" ½ | 192 | 113,5 | 155 | 0,0034 | 2,22 |
| EVOSTA 3 40/180 X 1" 1/4 | 180 | 107,5 | 144,1 | 45 | 99,1 | 91 | 2" | 192 | 113,5 | 155 | 0,0034 | 2,38 |

EVOSTA 3 - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from -10 °C to +110 °C - Maximum operating pressure: 10 bar (1000 kPa)

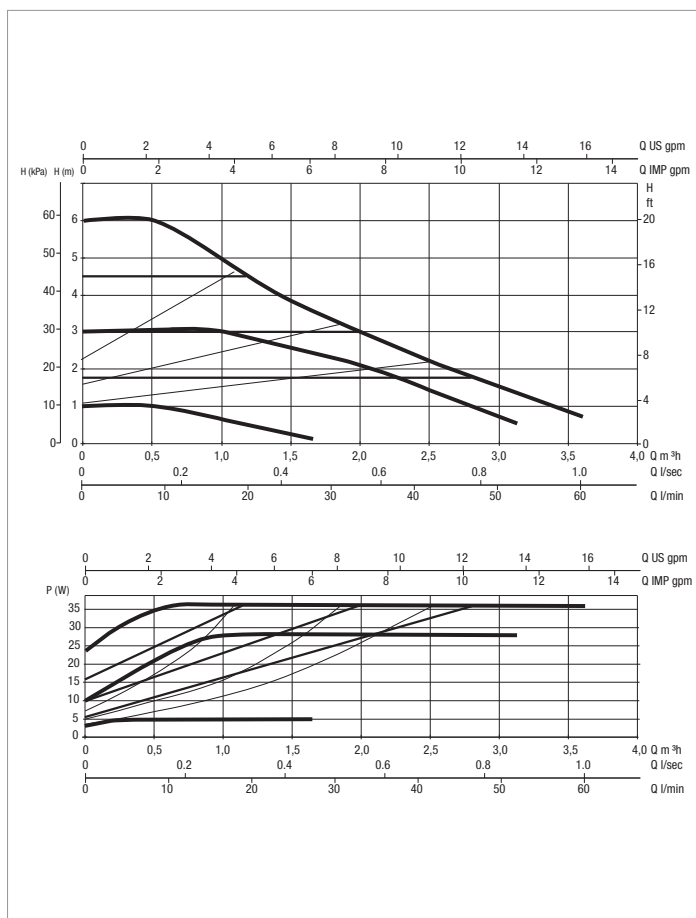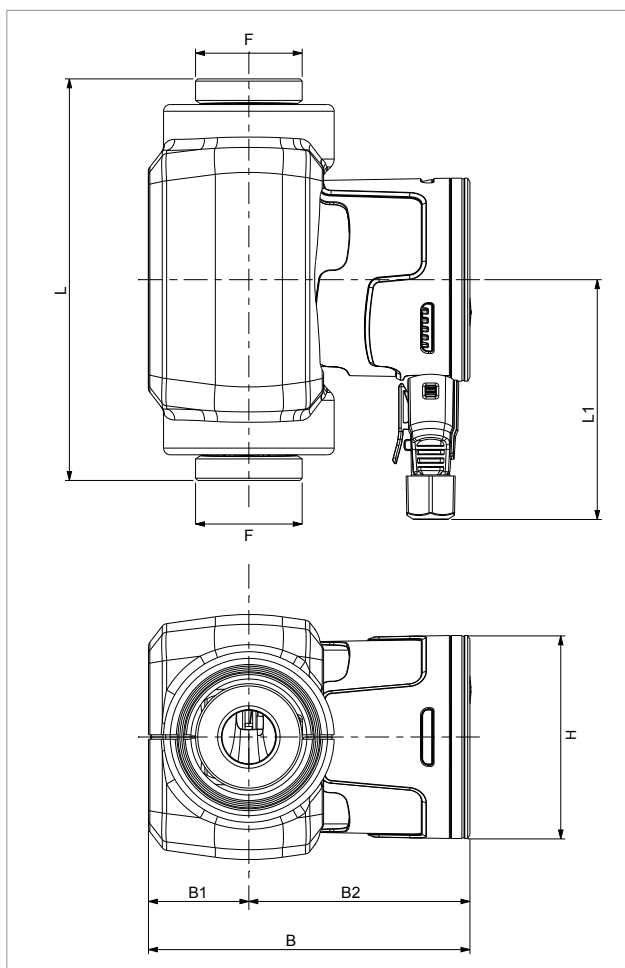

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

| MODEL | Q=m³h | 0 | 0,6 | 1,2 | 1,5 | 2,1 | 2,4 | 3,0 | 3,6 |
|-------------------------|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 9 | 20 | 25 | 35 | 40 | 50 | 60 |
| EVOSTA 3 60/130 1" | H (m) | 6,0 | 6,0 | 4,4 | 3,8 | 2,8 | 2,3 | 1,5 | 0,7 |
| EVOSTA 3 60/130 1/2" | | 6,0 | 6,0 | 4,4 | 3,8 | 2,8 | 2,3 | 1,5 | 0,7 |
| EVOSTA 3 60/180 1" | | 6,0 | 6,0 | 4,4 | 3,8 | 2,8 | 2,3 | 1,5 | 0,7 |
| EVOSTA 3 60/180X 1" 1/4 | | 6,0 | 6,0 | 4,4 | 3,8 | 2,8 | 2,3 | 1,5 | 0,7 |



| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | EEI * | MINIMUM SUCTION PRESSURE | |
|-------------------------|--------------------|------------------------|-------------------|----------|--------------|--------|--------------------------|-----|
| | | | | | | | t° | 90° |
| EVOSTA 3 60/130 1" | 130 | DN25 THREADED (G 1" ½) | 1x230V ~ | 35 | 0,042 - 0,33 | ≤ 0,18 | m.c.a. | 10 |
| EVOSTA 3 60/130 1/2" | 130 | DN15 THREADED (G 1") | 1x230V ~ | 35 | 0,042 - 0,33 | ≤ 0,18 | m.c.a. | 10 |
| EVOSTA 3 60/180 1" | 180 | DN25 THREADED (G 1" ½) | 1x230V ~ | 35 | 0,042 - 0,33 | ≤ 0,18 | m.c.a. | 10 |
| EVOSTA 3 60/180X 1" 1/4 | 180 | DN32 THREADED (G 2") | 1x230V ~ | 35 | 0,042 - 0,33 | ≤ 0,18 | m.c.a. | 10 |

*The parameter of reference for the more efficient circulators is EEI ≤ 0,19

| MODEL | L | L1 | B | B1 | B2 | H | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|-------------------------|-----|-------|-------|----|------|----|------|--------------------|-------|-----|-----------|-----------|
| | | | | | | | | L | B | H | | |
| EVOSTA 3 60/130 1" | 130 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1" ½ | 192 | 113,5 | 155 | 0,0034 | 2,05 |
| EVOSTA 3 60/130 1/2" | 130 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1 | 192 | 113,5 | 155 | 0,0034 | 1,9 |
| EVOSTA 3 60/180 1" | 180 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1" ½ | 192 | 113,5 | 155 | 0,0034 | 2,22 |
| EVOSTA 3 60/180X 1" 1/4 | 180 | 107,5 | 144,1 | 45 | 99,1 | 91 | 2" | 192 | 113,5 | 155 | 0,0034 | 2,38 |

EVOSTA 3 - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from -10 °C to +110 °C - Maximum operating pressure: 10 bar (1000 kPa)

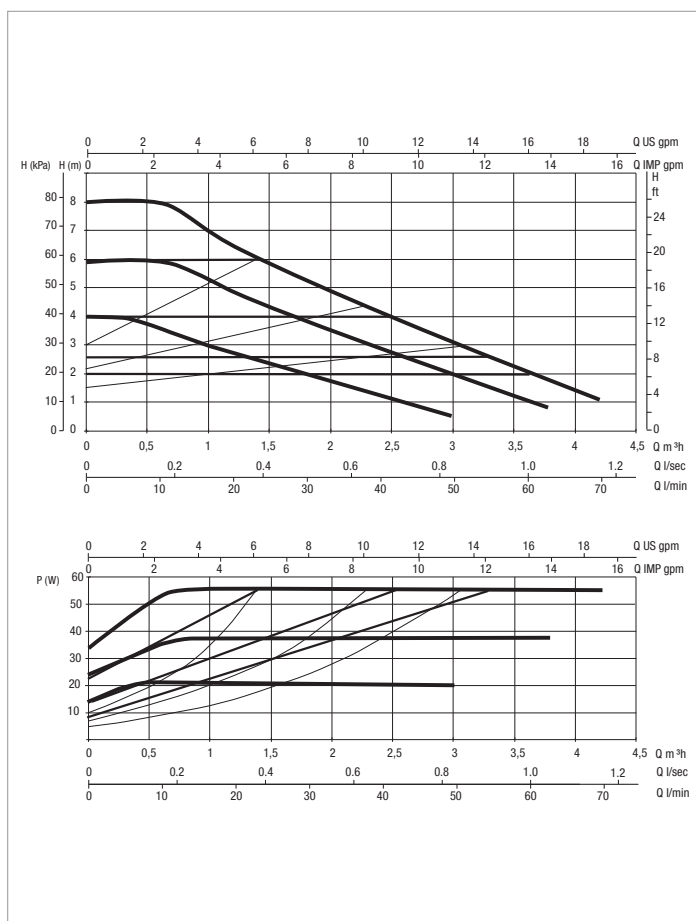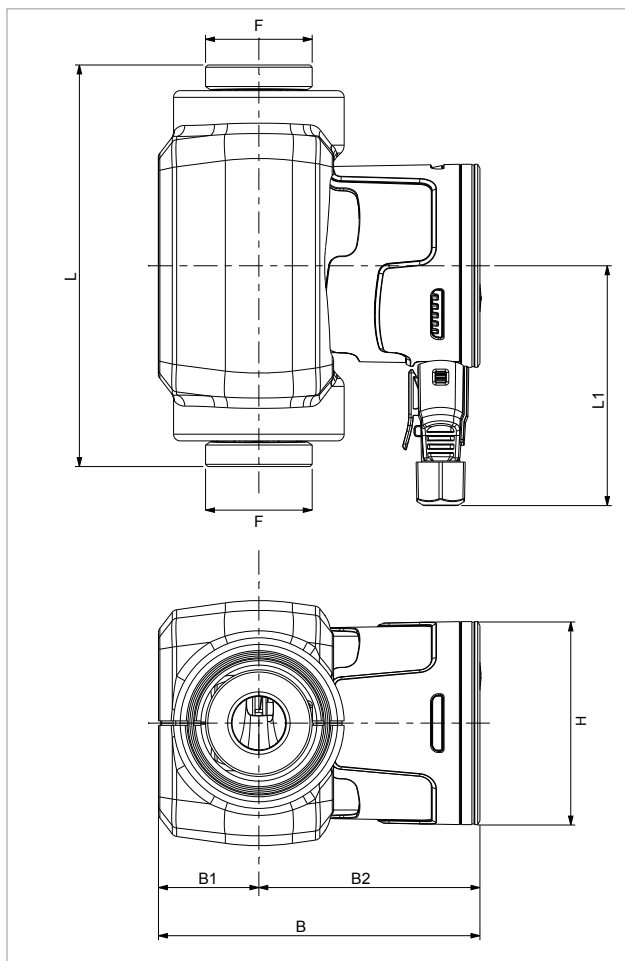

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

| MODEL | Q=m³h | 0 | 0,6 | 0,9 | 1,2 | 2,7 | 3,3 | 3,9 | 4,2 |
|-------------------------|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 10 | 15 | 20 | 45 | 55 | 65 | 70 |
| EVOSTA 3 80/130 1" | H (m) | 8,0 | 8,0 | 7,2 | 6,5 | 3,7 | 2,6 | 1,6 | 1,0 |
| EVOSTA 3 80/130 1/2" | | 8,0 | 8,0 | 7,2 | 6,5 | 3,7 | 2,6 | 1,6 | 1,0 |
| EVOSTA 3 80/180 1" | | 8,0 | 8,0 | 7,2 | 6,5 | 3,7 | 2,6 | 1,6 | 1,0 |
| EVOSTA 3 80/180X 1" 1/4 | | 8,0 | 8,0 | 7,2 | 6,5 | 3,7 | 2,6 | 1,6 | 1,0 |

| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | EEI * | MINIMUM SUCTION PRESSURE | |
|-------------------------|--------------------|------------------------|-------------------|----------|------------|--------|--------------------------|-----|
| | | | | | | | t° | 90° |
| EVOSTA 3 80/130 1" | 130 | DN25 THREADED (G 1" ½) | 1x230V ~ | 55 | 0,053-0,47 | ≤ 0,19 | m.c.a. | 10 |
| EVOSTA 3 80/130 1/2" | 130 | DN15 THREADED (G 1") | 1x230V ~ | 55 | 0,053-0,47 | ≤ 0,19 | m.c.a. | 10 |
| EVOSTA 3 80/180 1" | 180 | DN25 THREADED (G 1" ½) | 1x230V ~ | 55 | 0,053-0,47 | ≤ 0,19 | m.c.a. | 10 |
| EVOSTA 3 80/180X 1" 1/4 | 180 | DN32 THREADED (G 2") | 1x230V ~ | 55 | 0,053-0,47 | ≤ 0,19 | m.c.a. | 10 |

*The parameter of reference for the more efficient circulators is EEI ≤ 0,19

| MODEL | L | L1 | B | B1 | B2 | H | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|-------------------------|-----|-------|-------|----|------|----|------|--------------------|-------|-----|-----------|-----------|
| | | | | | | | | L | B | H | | |
| EVOSTA 3 80/130 1" | 130 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1" ½ | 192 | 113,5 | 155 | 0,0034 | 2,05 |
| EVOSTA 3 80/130 1/2" | 130 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1 | 192 | 113,5 | 155 | 0,0034 | 1,9 |
| EVOSTA 3 80/180 1" | 180 | 107,5 | 144,1 | 45 | 99,1 | 91 | 1" ½ | 192 | 113,5 | 155 | 0,0034 | 2,22 |
| EVOSTA 3 80/180X 1" 1/4 | 180 | 107,5 | 144,1 | 45 | 99,1 | 91 | 2" | 192 | 113,5 | 155 | 0,0034 | 2,38 |

EVOSTA 2 SAN

WET ROTOR ELECTRONIC CIRCULATORS



EVOSTA 2
SAN



ANTI-CLOGGING TECHNOLOGY
Limescale resistant even after long downtimes

TECHNICAL DATA

Operating range: 0,4-4,2 m³/h with head up to 8 metres.

Pumped liquid temperature range: from -10 °C to +110°C

Working pressure: 10 bar (1000 kPa)

Protection class: IPX5

Insulation class: F

Installation: with horizontal motor axis.

Standard power input: single-phase 1x230 V~ 50/60 Hz

Pumped liquid clean, free of solids and mineral oils, non-viscous, chemically neutral, with properties similar to water

APPLICATIONS

Low energy consumption electronic pump for domestic water circulation.

ADVANTAGES

The new range of **EVOSTA 2 SAN** circulators by DAB combines the strength of a mechanical circulator with the benefits of an electronic circulator.

Thanks to the permanent magnet synchronous motor, the frequency converter, as well as the protection class IPX5 and the integrated bleeding plug, **EVOSTA 2 SAN** family ranks as one of the best products in the category in terms of performance and reliability. The range of **EVOSTA 2 SAN** circulators is the perfect replacement for old three-speed circulators due to its compact size and all-round performance. The product is also extremely user-friendly, with a single button for sequential setting and direct access to the motor shaft for unlocking it when necessary.

CONSTRUCTION FEATURES

Bronze pump body and wet rotor motor. Steel motor casing, technopolymer impeller. Ceramic motor shaft on ceramic bushings lubricated by the pumped liquid. Stainless steel rotor liner and closing flange. Graphite thrust ring. EPDM seal ring and brass air bleeding plug.

Thanks to the internal protection of the motor, the pump does not require any overload protection.

CONTROL PANEL


The settings of **EVOSTA 2 SAN** circulators can be modified in the control panel on the face of the pump. The pump has nine settings that can be selected scrolling the **MODE** button. Six illuminated segments on the display indicate the settings of the pump.

EVOSTA 2 SAN

WET ROTOR ELECTRONIC CIRCULATORS

MATERIALS

| N° | PARTS | MATERIALS |
|----|------------------|----------------------------------|
| 1 | ROTOR CAN FLANGE | AISI 316 |
| 2 | IMPELLER | ULTRASON |
| 3 | SHAFT | ALUMINA |
| 4 | ROTOR | Fe |
| 5 | BEARING HOUSING | BRASS |
| 6 | BEARING | ALUMINA |
| 7 | AXIAL BEARING | GRAPHITE |
| 8 | AXIAL HOUSING | EPDM |
| 9 | PLUG | BRASS |
| 10 | O-ring | EPDM |
| 11 | STATOR HOUSING | AISI 304 |
| 12 | ENCLOUSER SHELL | POLYCARBONATE |
| 13 | ENCLOUSER | POLYCARBONATE |
| 14 | ROTOR SLEEVE | AISI 304 |
| 15 | SEAL | EPDM |
| 16 | PUMP HOUSING | CAST IRON - BRONZE (SAN VERSION) |
| 17 | NECK RING | AISI 304 |
| 18 | CONNECTOR | POLYCARBONATE |

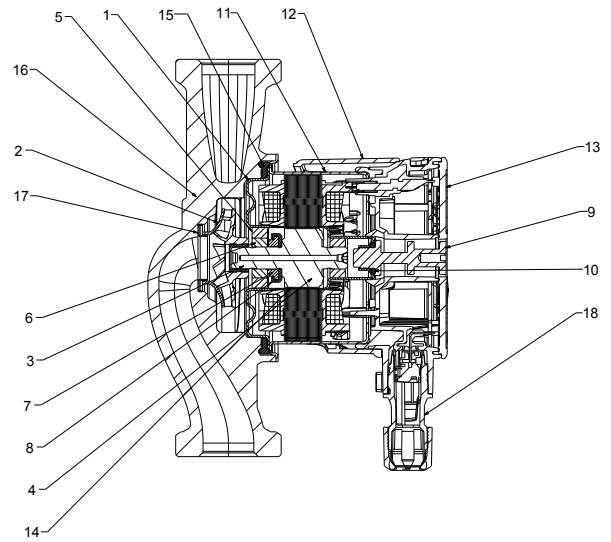

REGULATION MODES

PROPORTIONAL PRESSURE REGULATION MODE

PP1
PP2
PP3

CONSTANT PRESSURE REGULATION MODE

CP1
CP2
CP3

FIXED CURVE REGULATION MODE

I
II
III

Model Number:
(example)

EVOSTA 2 SAN 40-70 / 150



Threaded connection electronic circulator

Maximum head range (dm)

Centre distance (mm)

EVOSTA 2 SAN - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from -10 °C to +110 °C - Maximum operating pressure: 10 bar (1000 kPa)

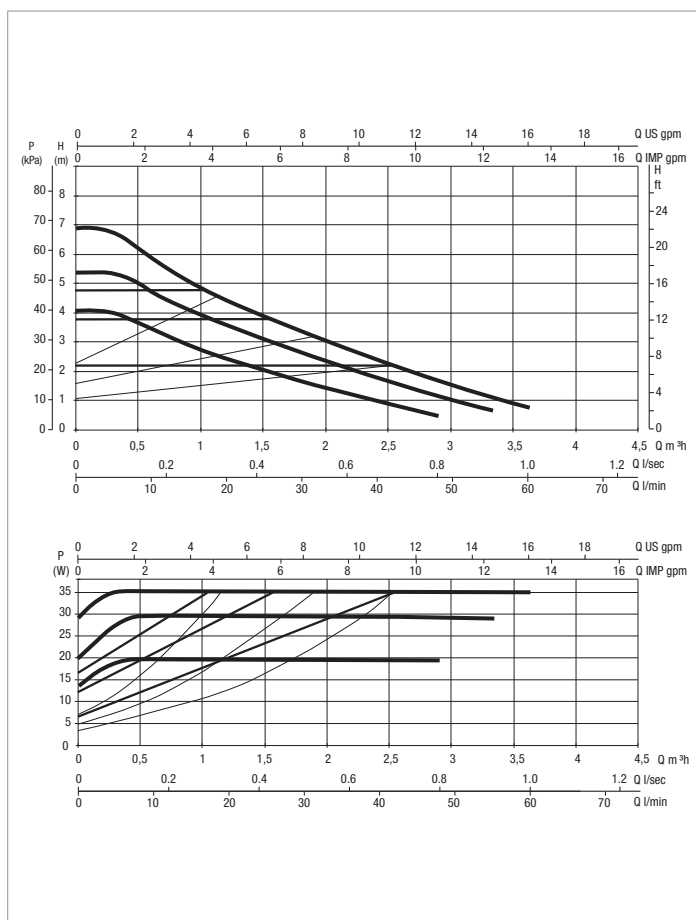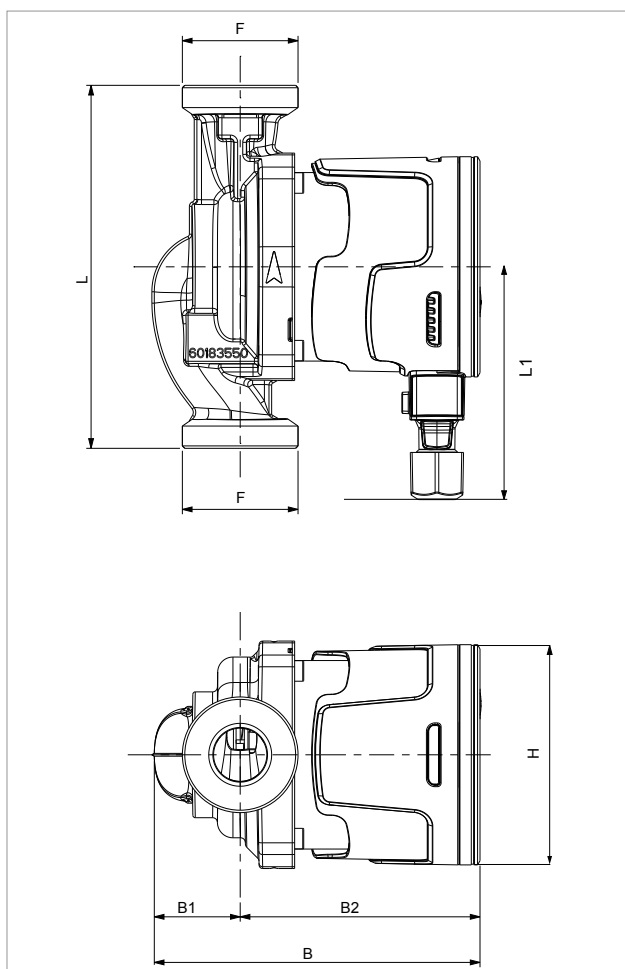

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



| MODEL | Q=m ³ h | 0,0 | 0,9 | 1,8 | 2,4 | 3,0 | 3,6 |
|------------------------|--------------------|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 15 | 30 | 40 | 50 | 60 |
| EVOSTA 2 SAN 40-70/150 | H (m) | 6,9 | 5,1 | 3,4 | 2,4 | 1,6 | 0,8 |

| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | MINIMUM SUCTION PRESSURE | |
|------------------------|--------------------|------------------------|-------------------|----------|--------------|--------------------------|-----|
| | | | | | | t° | 90° |
| EVOSTA 2 SAN 40-70/150 | 150 | DN25 THREADED (G 1" ½) | 1x230V ~ | 35 | 0,043 - 0,32 | m.c.a. | 10 |

| MODEL | L | L1 | B | B1 | B2 | H | F | PACKING DIMENSIONS | | | VOLUME m ³ | WEIGHT kg |
|------------------------|-----|----|-------|------|------|----|------|--------------------|----|-----|-----------------------|-----------|
| | | | | | | | | L | B | H | | |
| EVOSTA 2 SAN 40-70/150 | 150 | 96 | 134,6 | 35,5 | 99,1 | 91 | 1" ½ | 192 | 99 | 150 | 0,0028 | 2,16 |

EVOSTA 2 SAN - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from -10 °C to +110 °C - Maximum operating pressure: 10 bar (1000 kPa)

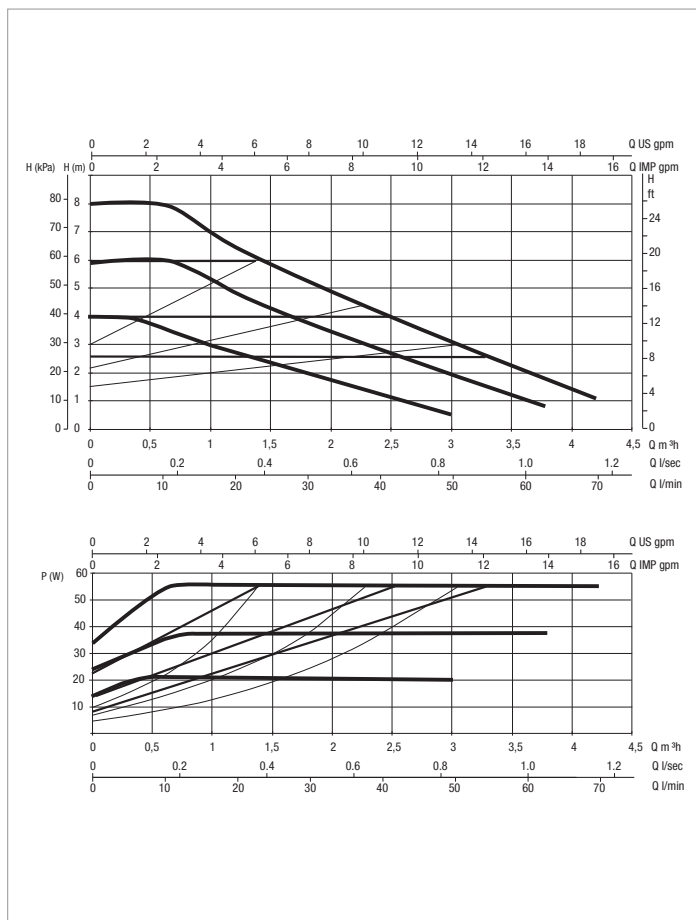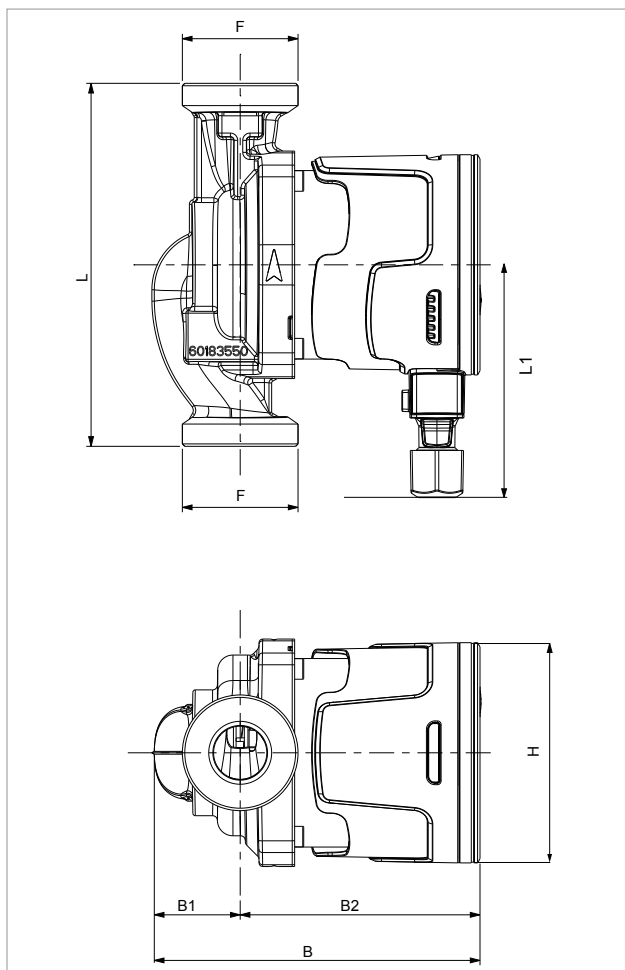

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

| MODEL | Q=m ³ h | 0,0 | 0,9 | 1,8 | 2,4 | 3,0 | 3,6 | 4,2 |
|------------------------|--------------------|-----|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 15 | 30 | 40 | 50 | 60 | 70 |
| EVOSTA 2 SAN 80/150 1" | H (m) | 8 | 7,2 | 5,4 | 4,2 | 3,2 | 2,1 | 1 |

| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | MINIMUM SUCTION PRESSURE | |
|------------------------|--------------------|------------------------|-------------------|----------|-------------|--------------------------|-----|
| | | | | | | t° | 90° |
| EVOSTA 2 SAN 80/150 1" | 150 | DN25 THREADED (G 1" ½) | 1x230 V ~ | 55 | 0,053 -0,47 | m.c.a. | 10 |

| MODEL | L | L1 | B | B1 | B2 | H | F | PACKING DIMENSIONS | | | VOLUME m ³ | WEIGHT kg |
|------------------------|-----|----|-------|------|------|----|------|--------------------|----|-----|-----------------------|-----------|
| | | | | | | | | L | B | H | | |
| EVOSTA 2 SAN 80/150 1" | 150 | 96 | 134.6 | 35.5 | 99.1 | 91 | 1" ½ | 192 | 99 | 150 | 0,0028 | 2,16 |

EVOSTA 2 SAN V, R

WET ROTOR ELECTRONIC CIRCULATORS



EVOSTA 2
SAN V/R



ANTI-CLOGGING TECHNOLOGY
Limescale resistant even after long downtimes

TECHNICAL DATA

Operating range: 0-0,7 m³/h with head up to 1,2 metres
Pumped liquid temperature range: : from +2 °C to +75°C
Working pressure: 10 bar (1000 kPa)
Protection class: IP42
Insulation class: II
Installation: with horizontal motor axis.
Standard power input: single-phase 1x115-230 V~ 50/60 Hz
Pumped liquid: clean, free of solids and mineral oils, non-viscous, chemically neutral.

APPLICATIONS

Low energy consumption electronic pump for domestic hot water circulation.

CONSTRUCTION FEATURES



Self-protected synchronous motor with spherical rotor requiring just one seal ring between the motor and the pump body. Easy to clean or replace.
 Brass pump body with R ½" (G ½") internal thread in the R version, or with check valve and isolation valve supplied as standard in version V for connector with ½" external thread (G 1")

Model Number:
(example)

| | EVOSTA 2 | 11/139 | V | R |
|--------------------------------------|----------|--------|-------|-------|
| Threaded ports electronic circulator | _____ | _____ | _____ | _____ |
| Maximum head range (dm) | _____ | _____ | _____ | _____ |
| External thread: ½" G 1" | _____ | _____ | _____ | _____ |
| Internal thread: R ½" (G ½") | _____ | _____ | _____ | _____ |

EVOSTA 2 SAN V, R - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: from +2 °C to +75°C - Maximum operating pressure: 10 bar (1000 kPa)

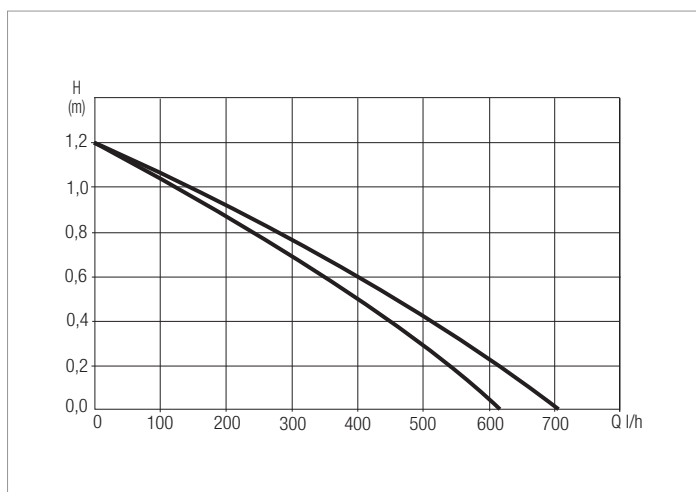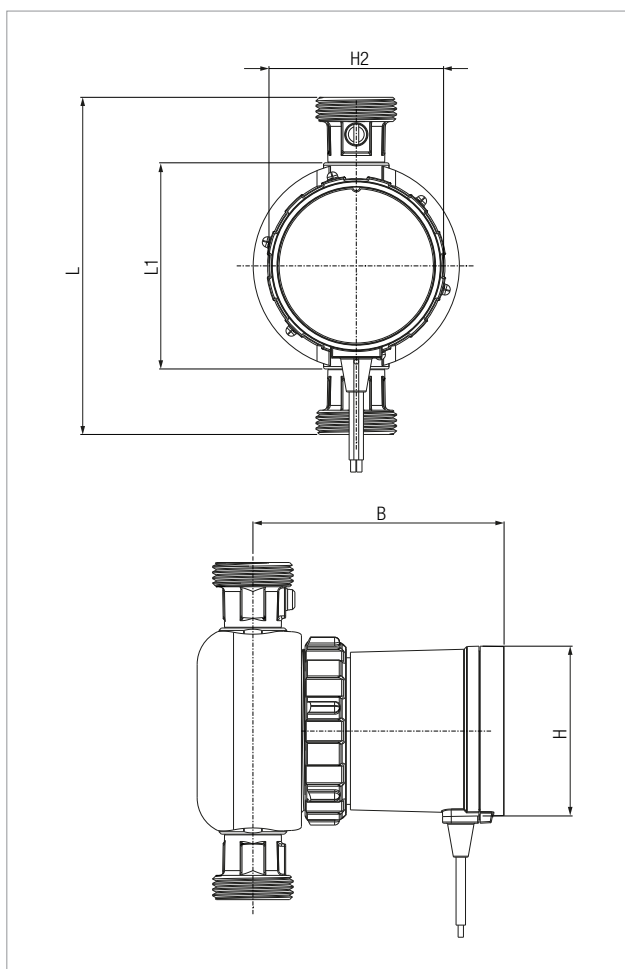

Le curve di prestazione sono basate su valori di viscosità cinematica = 1 mm²/s e densità pari a 1000 kg/m³. Tolleranza delle curve secondo ISO9906.

| MODEL | Q=m ³ h | 0 | 0,1 | 0,2 | 0,3 | 0,4 | 0,5 | 0,6 | 0,7 |
|------------------|--------------------|------|------|------|------|------|------|------|------|
| | Q=l/h | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 |
| EVOSTA2 11/139 V | H (m) | 1,20 | 1,04 | 0,88 | 0,70 | 0,50 | 0,28 | 0,05 | — |
| EVOSTA2 11/85 R | | 1,20 | 1,07 | 0,93 | 0,78 | 0,61 | 0,42 | 0,22 | 0,02 |

| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | POWER INPUT 50 Hz | P1 MAX W | In A | MINIMUM SUCTION PRESSURE | |
|------------------|--------------------|------------------------|-----------------------|----------|--------|--------------------------|-----|
| | | | | | | t° | 90° |
| EVOSTA2 11/139 V | 139 | external thread G 1" | 1x115-230 V- 50/60 Hz | 7 | 0,07 A | m.c.a. | 10 |
| EVOSTA2 11/85 R | 85 | internal thread G 1/2" | 1x115-230 V- 50/60 Hz | 7 | 0,07 A | m.c.a. | 10 |

| MODEL | L | L1 | B | H | H2 | CABLE LENGTH | PACKING DIMENSIONS | | | VOLUME m ³ | WEIGHT kg |
|------------------|-----|----|-----|----|----|--------------|--------------------|-----|-----|-----------------------|-----------|
| | | | | | | | L | B | H | | |
| EVOSTA2 11/139 V | 139 | - | 104 | 70 | 80 | 1,5 m | 170 | 120 | 110 | 0,0023 | 1,06 |
| EVOSTA2 11/85 R | - | 85 | 104 | 70 | 80 | 1,5 m | 170 | 120 | 110 | 0,0023 | 1,26 |

EVOSTA 2 SOL

WET ROTOR ELECTRONIC CIRCULATORS



TECHNICAL DATA

Operating range: 0-4 m³/h with head up to 14,5 metres.
Pumped liquid temperature range: from -10 °C to +110 °C (130 °C for small periods of time)
Maximum ambient temperature: +40°C.
Working pressure: 10 bar (1000 kPa)
Protection class: IPX4
Insulation class: F
Installation: with horizontal motor axis
Standard power input: single-phase 1x115-230 V ~ 50/60 Hz
Power cable: MOLEX plug with 1.5m cable
Pwm signal connector: plug with 1.5m cable (SOL PWM versions only)
Pumped liquid: clean, free of solids and mineral oils, non-viscous, chemically neutral, with properties similar to water (glycol max 50%).

APPLICATIONS

Low energy consumption electronic pump for water circulation in all types of solar heating systems.

ADVANTAGES

EVOSTA 2 SOL is the new range of DAB circulators that combines the strength of the mechanical circulator with the benefits of the electronic circulator. Thanks to the permanent magnet synchronous motor, the frequency converter and the energy efficiency index of $EEL \leq 0.20$, as well as the IPX4 protection class and the integrated breather plug, the **EVOSTA 2 SOL** family ranks as one of the best products in the category in terms of performance and reliability. The range of **EVOSTA 2 SOL** circulators is the perfect substitute for old three-speed circulators due to its compact size and all-round performance. The product is extremely user-friendly, with a single key for sequential setting and direct access to the motor shaft for unlocking this when necessary.

CONSTRUCTION FEATURES

Cast iron pump body with cataphoresis paint coating and wet rotor motor. Steel motor casing, technopolymer impeller. Ceramic motor shaft on ceramic bushings lubricated by the pumped liquid. Stainless steel rotor liner, stator liner and closing flange. Graphite thrust ring. EPDM seal ring and brass air breather plug. Thanks to the internal protection of the motor, the pump does not require overload protection.

CONTROL PANEL

The functions of the **EVOSTA 2 SOL** circulators can be modified at the control panel on the cover of the electronic control device. The pump has nine settings that can be selected using the **MODE** button

Six illuminated segments on the display indicate the settings of the pump. The **EVOSTA SOL PWM** version can be controlled from an external control unit using the PWM (Pulse Width Modulation) digital signal. The setpoint of the adjustment curve can be of the following types:

- Proportional pressure
- Constant speed.

This is set through the PWM signal duty cycle, applied according to the VDMA Einheitsblatt 24244 standard "Wet runner circulating pumps – Specification of PWM control signals".


Moreover, a PWM signal on the output of the board indicates the operating mode of the circulator, as specified below.

EVOSTA 2 SOL

WET ROTOR ELECTRONIC CIRCULATORS

MATERIALS

| N° | PARTS | MATERIALS |
|----|------------------|---------------|
| 1 | ROTOR CAN FLANGE | AISI 316 |
| 2 | IMPELLER | ULTRASON |
| 3 | SHAFT | ALUMINA |
| 4 | ROTOR | NEODYMIUM |
| 5 | BEARING HOUSING | BRASS |
| 6 | BEARING | ALUMINA |
| 7 | AXIAL BEARING | CARBON |
| 8 | AXIAL HOUSING | EPDM |
| 9 | PLUG | BRASS |
| 10 | O-ring | EPDM |
| 11 | STATOR HOUSING | AISI 304 |
| 12 | ENCLOUSER SHELL | POLYCARBONATE |
| 13 | ENCLOUSER | POLYCARBONATE |
| 14 | ROTOR SLEEVE | AISI 304 |
| 15 | SEAL | EPDM |
| 16 | PUMP HOUSING | CAST IRON |
| 17 | NECK RING | AISI 304 |

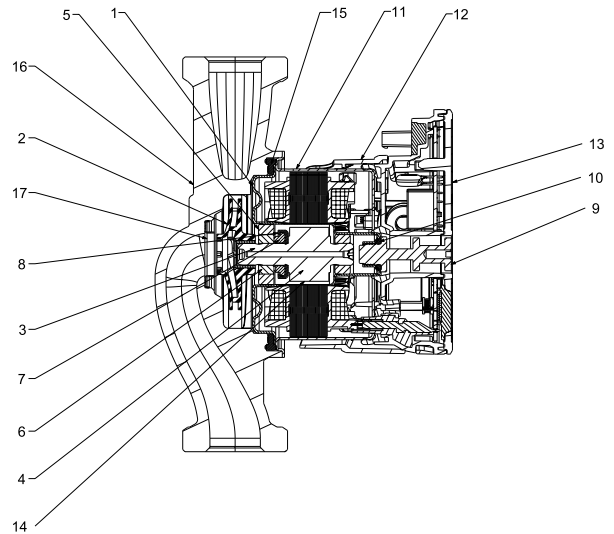

REGULATION MODES

PROPORTIONAL PRESSURE REGULATION MODE

PP1 PP2 PP3

CONSTANT PRESSURE REGULATION

I II III IV V VI

- Model Number
(example)

EVOSTA 2 SOL 75 / 130 X

Threaded connections electronic circulator _____

Maximum head range (dm) _____

Centre distance (mm) _____

Standard (no ref.) = 1" ½ threaded connections
 ½" = 1" threaded connections
 X = 2" threaded connections

EVOSTA 2 SOL



WET ROTOR ELECTRONIC CIRCULATORS

SELECTION TABLE

| MODEL | Q=m ³ h | 0,0 | 0,5 | 1 | 1,5 | 2 | 2,5 | 3 | 3,5 | 4 |
|-------------------------|--------------------|------|------|-----|-----|-----|-----|-----|-----|-----|
| | Q=l/min | 0 | 8 | 16 | 25 | 33 | 40 | 50 | 60 | 66 |
| EVOSTA2 75/130 SOL | H (m) | 7,5 | 7,5 | 6,2 | 5,1 | 4,2 | 3,4 | 2,5 | 1,7 | 0,9 |
| EVOSTA2 75/180 SOL | | 7,5 | 7,5 | 6,2 | 5,1 | 4,2 | 3,4 | 2,5 | 1,7 | 0,9 |
| EVOSTA2 105/130 SOL | | 10,5 | 9 | 6,8 | 5,4 | 4,1 | 3,2 | 2 | 0,8 | |
| EVOSTA2 105/180 SOL | | 10,5 | 9 | 6,8 | 5,4 | 4,1 | 3,2 | 2 | 0,8 | |
| EVOSTA2 145/130 SOL | | 14,3 | 10,2 | 8,2 | 6,2 | 5 | 3,8 | 2,2 | 1,2 | |
| EVOSTA2 145/180 SOL | | 14,3 | 10,2 | 8,2 | 6,2 | 5 | 3,8 | 2,2 | 1,2 | |
| EVOSTA2 75/130 SOL PWM | | 7,5 | 7,5 | 6,2 | 5,1 | 4,2 | 3,4 | 2,5 | 1,7 | 0,9 |
| EVOSTA2 75/180 SOL PWM | | 7,5 | 7,5 | 6,2 | 5,1 | 4,2 | 3,4 | 2,5 | 1,7 | 0,9 |
| EVOSTA2 105/130 SOL PWM | | 10,5 | 9 | 6,8 | 5,4 | 4,1 | 3,2 | 2 | 0,8 | |
| EVOSTA2 105/180 SOL PWM | | 10,5 | 9 | 6,8 | 5,4 | 4,1 | 3,2 | 2 | 0,8 | |
| EVOSTA2 145/130 SOL PWM | | 14,3 | 10,2 | 8,2 | 6,2 | 5 | 3,8 | 2,2 | 1,2 | |
| EVOSTA2 145/180 SOL PWM | | 14,3 | 10,2 | 8,2 | 6,2 | 5 | 3,8 | 2,2 | 1,2 | |

EVOSTA 2 SOL - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: da -10°C a +110°C - Maximum operating pressure: 10 bar (1000 kPa)

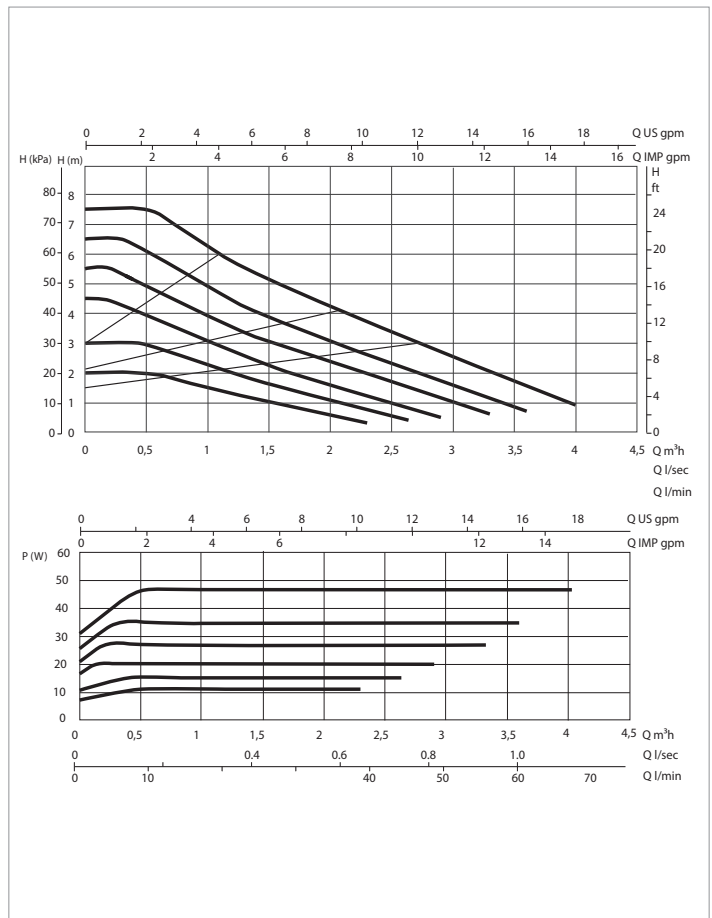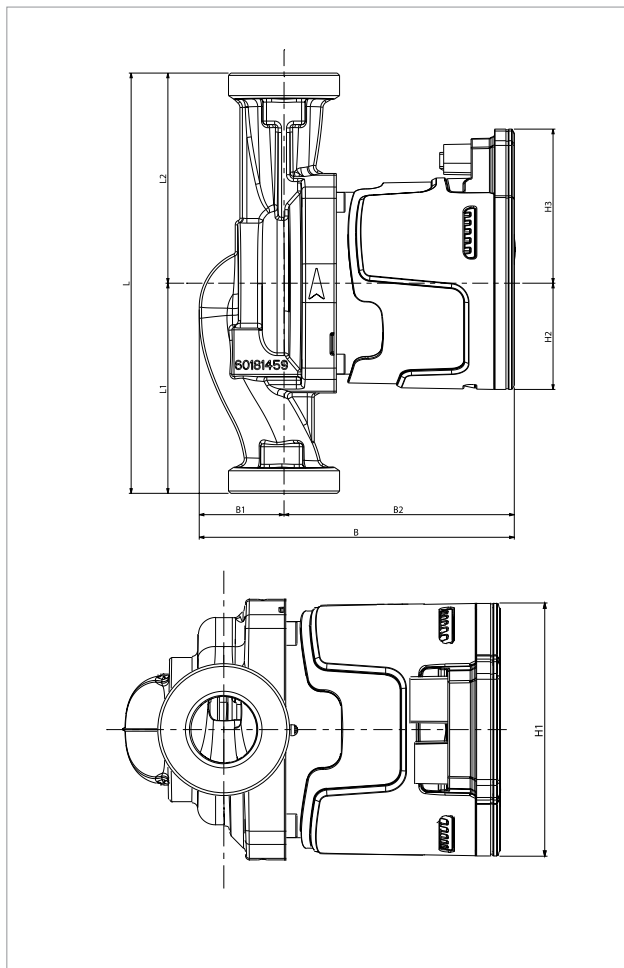

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | SIGNAL PWM | POWER INPUT 50 Hz | P1 MAX W | In A | EEI* | MINIMUM SUCTION PRESSURE | |
|----------------------------|-----------------------|-------------------------|---------------|----------------------|-------------|----------|--------|-----------------------------|-----|
| | | | | | | | | t° | 90° |
| EVOSTA2 75/130 SOL | 130 | DN25 THREADED (G 1" ½) | NO | 1x230 V ~ | 47 | 0,07-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 75/180 SOL | 180 | DN25 THREADED (G 1" ½) | NO | 1x230 V ~ | 47 | 0,07-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 75/130 SOL 1/2 | 130 | DN15 THREADED (G 1") | NO | 1x230 V ~ | 47 | 0,07-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 75/130 SOL PWM | 130 | DN25 THREADED (G 1" ½) | SI | 1x230 V ~ | 47 | 0,07-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 75/130 SOL PWM 1/2 | 130 | DN15 THREADED (G 1") | SI | 1x230 V ~ | 47 | 0,07-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 75/180 SOL PWM | 180 | DN25 THREADED (G 1" ½) | SI | 1x230 V ~ | 47 | 0,07-0,4 | ≤ 0,20 | m.c.a | 10 |

*The parameter of reference for the more efficient circulators is EEI ≤ 0,19

| MODEL | L | L1 | L2 | B | B1 | B2 | H | H1 | H2 | H3 | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|----------------------------|-----|----|----|-----|----|----|----|----|------|----|-------|--------------------|-----|-----|--------------|--------------|
| | | | | | | | | | | | | L | B | H | | |
| EVOSTA2 75/130 SOL | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,07 |
| EVOSTA2 75/180 SOL | 180 | 90 | 90 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,24 |
| EVOSTA2 75/130 SOL 1/2 | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1" | 192 | 100 | 150 | 0,028 | 1,91 |
| EVOSTA2 75/130 SOL PWM | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,12 |
| EVOSTA2 75/130 SOL PWM 1/2 | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1" | 192 | 100 | 150 | 0,028 | 1,96 |
| EVOSTA2 75/180 SOL PWM | 180 | 90 | 90 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,29 |

EVOSTA 2 SOL - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: da -10°C a +110°C - Maximum operating pressure: 10 bar (1000 kPa)

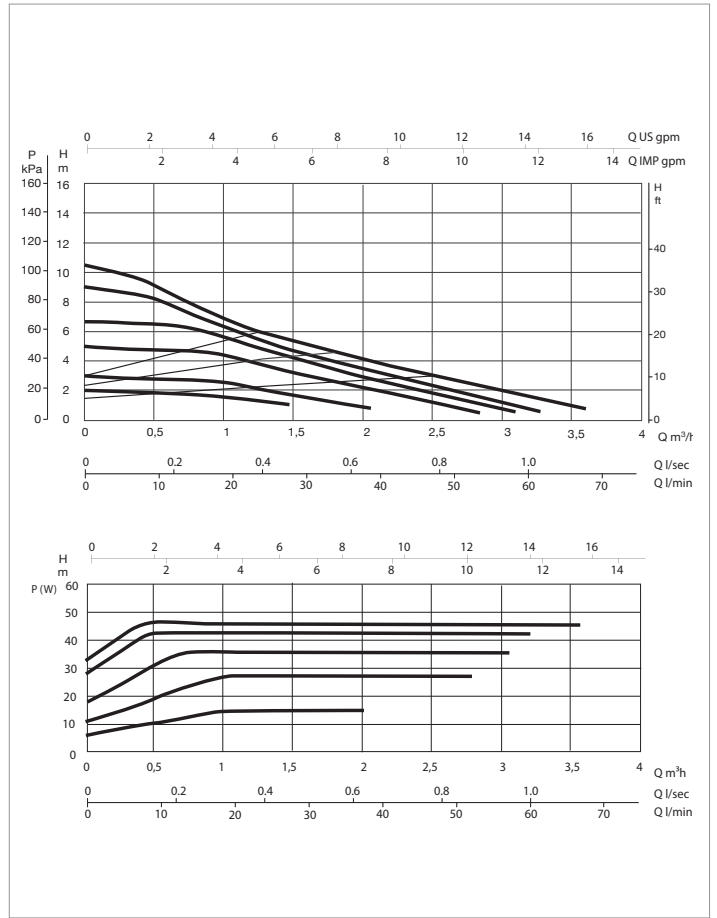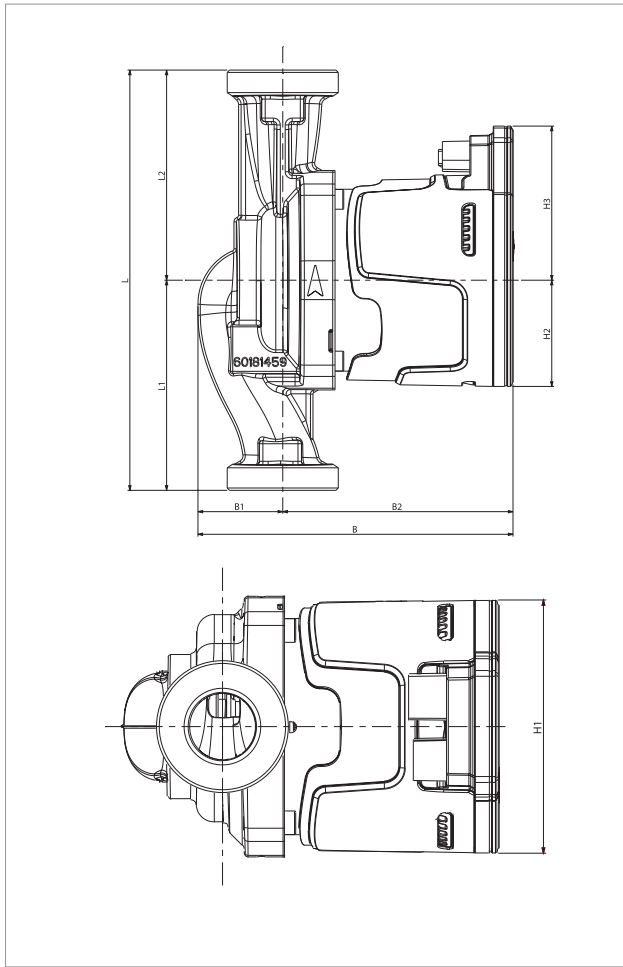

Le curve di prestazione sono basate su dati cinematici con densità di 1000 kg/m³. Tolleranza di fabbricazione: ±0,19.



| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | SIGNAL PWM | POWER INPUT 50 Hz | P1 MAX W | In A | EEI* | MINIMUM SUCTION PRESSURE | |
|-----------------------------|-----------------------|------------------------|---------------|----------------------|-------------|-----------|--------|-----------------------------|-----|
| | | | | | | | | t° | 90° |
| EVOSTA2 105/130 SOL | 130 | DN25 THREADED (G 1" ½) | NO | 1x230 V ~ | 48 | 0,055-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 105/180 SOL | 180 | DN25 THREADED (G 1" ½) | NO | 1x230 V ~ | 48 | 0,055-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 105/130 SOL 1/2 | 130 | DN15 THREADED (G 1") | NO | 1x230 V ~ | 48 | 0,055-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 105/130 SOL PWM | 130 | DN25 THREADED (G 1" ½) | SI | 1x230 V ~ | 48 | 0,055-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 105/130 SOL PWM 1/2 | 130 | DN15 THREADED (G 1") | SI | 1x230 V ~ | 48 | 0,055-0,4 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 105/180 SOL PWM | 180 | DN25 THREADED (G 1" ½) | SI | 1x230 V ~ | 48 | 0,055-0,4 | ≤ 0,20 | m.c.a | 10 |

*The parameter of reference for the more efficient circulators is EEI ≤ 0,19

| MODEL | L | L1 | L2 | B | B1 | B2 | H | H1 | H2 | H3 | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|-----------------------------|-----|----|----|-----|----|----|----|----|------|----|-------|--------------------|-----|-----|--------------|--------------|
| | | | | | | | | | | | | L | B | H | | |
| EVOSTA2 105/130 SOL | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,07 |
| EVOSTA2 105/180 SOL | 180 | 90 | 90 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,24 |
| EVOSTA2 105/130 SOL 1/2 | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1" | 192 | 100 | 150 | 0,028 | 1,91 |
| EVOSTA2 105/130 SOL PWM | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,12 |
| EVOSTA2 105/130 SOL PWM 1/2 | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1" | 192 | 100 | 150 | 0,028 | 1,96 |
| EVOSTA2 105/180 SOL PWM | 180 | 90 | 90 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,29 |

EVOSTA 2 SOL - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: da -10°C a +110°C - Maximum operating pressure: 10 bar (1000 kPa)

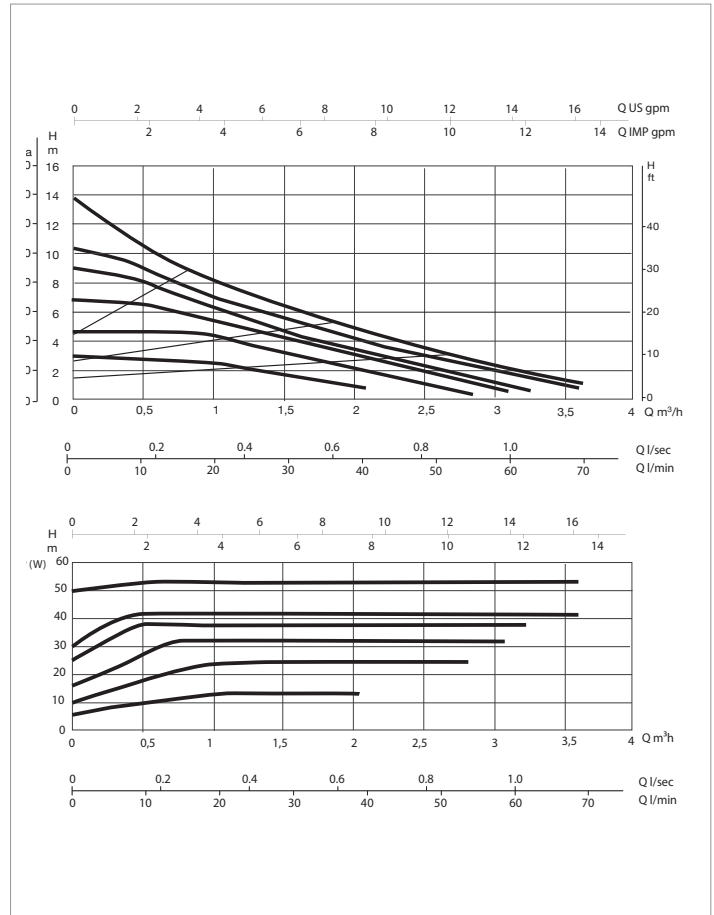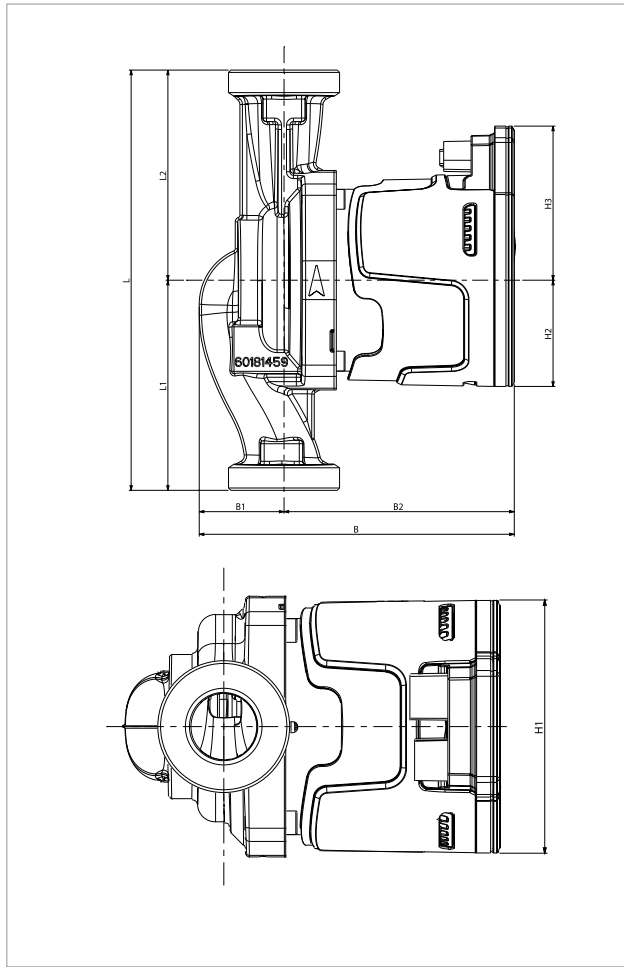

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



| MODEL | CENTRE DISTANCE mm | PUMP CONNECTIONS | SIGNAL PWM | POWER INPUT 50 Hz | P1 MAX W | In A | EEI* | MINIMUM SUCTION PRESSURE | |
|-----------------------------|-----------------------|-------------------------|---------------|----------------------|-------------|----------|--------|-----------------------------|-----|
| | | | | | | | | t° | 90° |
| EVOSTA2 145/130 SOL | 130 | DN25 THREADED (G 1" ½) | NO | 1x230 V ~ | 59 | 0,07-0,5 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 145/180 SOL | 180 | DN25 THREADED (G 1" ½) | NO | 1x230 V ~ | 59 | 0,07-0,5 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 145/130 SOL 1/2 | 130 | DN15 THREADED (G 1") | NO | 1x230 V ~ | 59 | 0,07-0,5 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 145/130 SOL PWM | 130 | DN25 THREADED (G 1" ½) | SI | 1x230 V ~ | 59 | 0,07-0,5 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 145/130 SOL PWM 1/2 | 130 | DN15 THREADED (G 1") | SI | 1x230 V ~ | 59 | 0,07-0,5 | ≤ 0,20 | m.c.a | 10 |
| EVOSTA2 145/180 SOL PWM | 180 | DN25 THREADED (G 1" ½) | SI | 1x230 V ~ | 59 | 0,07-0,5 | ≤ 0,20 | m.c.a | 10 |

*The parameter of reference for the more efficient circulators is EEI ≤ 0,19

| MODEL | L | L1 | L2 | B | B1 | B2 | H | H1 | H2 | H3 | F | PACKING DIMENSIONS | | | VOLUME m³ | WEIGHT kg |
|-----------------------------|-----|----|----|-----|----|----|----|----|------|----|-------|--------------------|-----|-----|--------------|--------------|
| | | | | | | | | | | | | L | B | H | | |
| EVOSTA2 145/130 SOL | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,07 |
| EVOSTA2 145/180 SOL | 180 | 90 | 90 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,24 |
| EVOSTA2 145/130 SOL 1/2 | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1" | 192 | 100 | 150 | 0,028 | 1,91 |
| EVOSTA2 145/130 SOL PWM | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,12 |
| EVOSTA2 145/130 SOL PWM 1/2 | 130 | 65 | 65 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1" | 192 | 100 | 150 | 0,028 | 1,96 |
| EVOSTA2 145/180 SOL PWM | 180 | 90 | 90 | 135 | 36 | 99 | 94 | 91 | 45,5 | 66 | 1"1/2 | 192 | 100 | 150 | 0,028 | 2,29 |

EVOSTA 2 SOL - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: da -10°C a +110°C - Maximum operating pressure: 10 bar (1000 kPa)

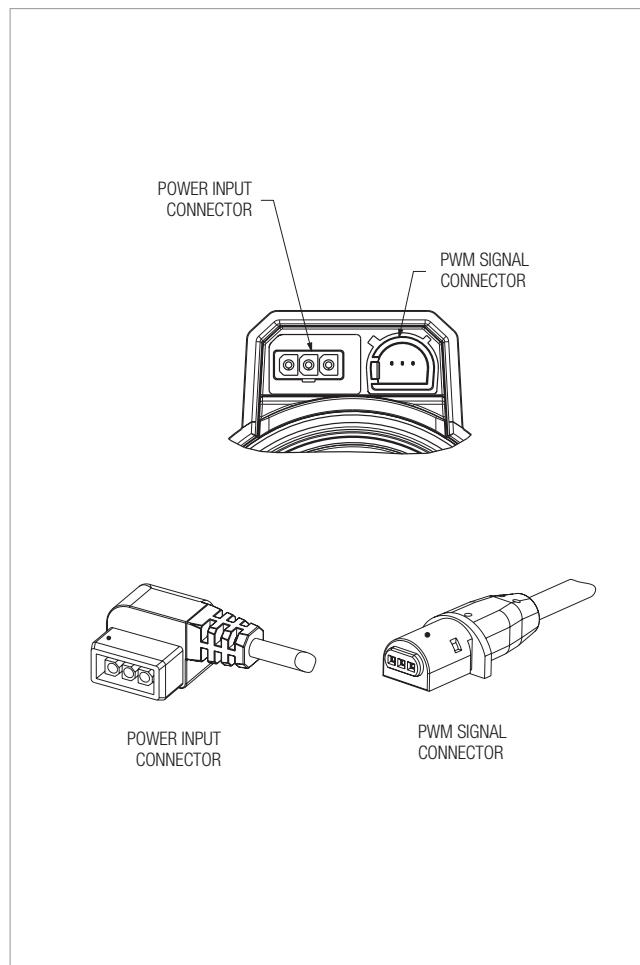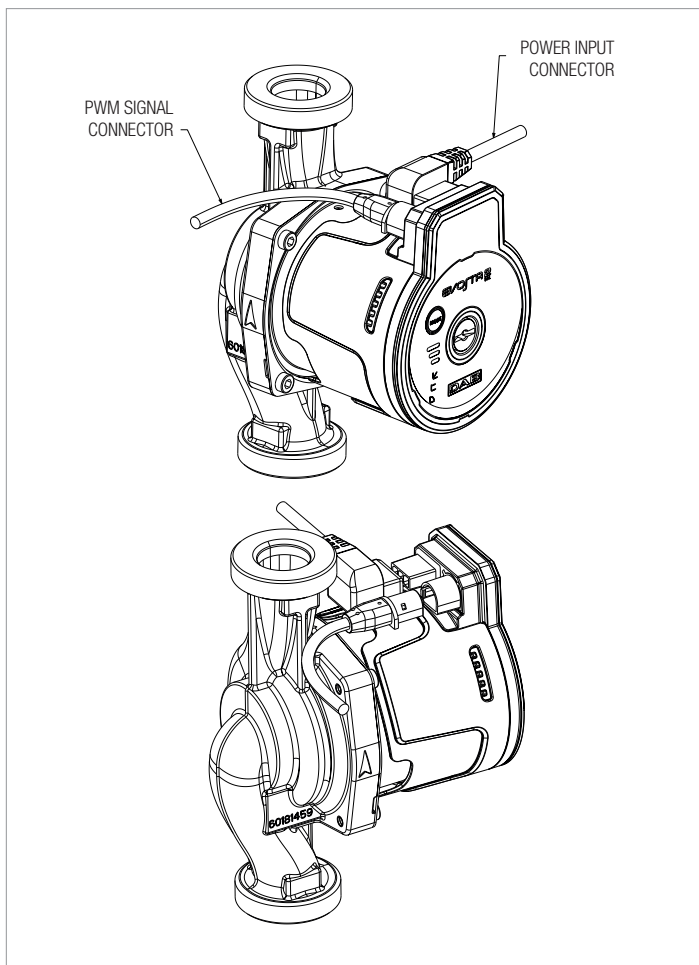

| MODEL | CABLE LENGTH |
|-----------------------|--------------|
| POWER INPUT CONNECTOR | 1,5 m |
| PWM SIGNAL CONNECTOR | 1,5 m |

EVOSTA 2 SOL - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: da -10°C a +110°C - Maximum operating pressure: 10 bar (1000 kPa)

INPUT PWM SIGNAL

Inactive level: 0V


Active level: 4V-24V

Active level minimum current: 5 mA

Frequency: 100Hz - 5 kHz

Protection class: Class 2

ESD class: Compliance with IEC 61000-4-2 (ESD)

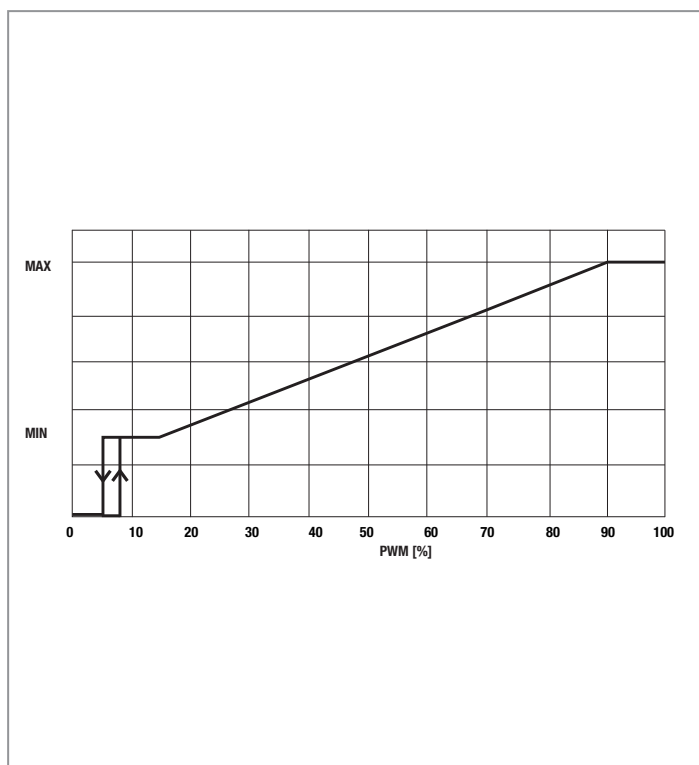

| WORKING AREA | DUTY CYCLE PWM |
|-------------------|------------------|
| STANDBY MODE | < 5% |
| HYSTERESIS AREA | ≥ 5 % / < 9 % |
| MINIMUM SET POINT | ≥ 9 % / < 16 % |
| VARIABLE SETPOINT | ≥ 16 % / ≤ 90 % |
| MAXIMUM SETPOINT | ≥ 90 % / ≤ 100 % |

EVOSTA 2 SOL - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING AND COOLING SYSTEMS - SINGLE, WITH UNIONS

Pumped liquid temperature range: da -10°C a +110°C - Maximum operating pressure: 10 bar (1000 kPa)

OUTPUT PWM SIGNAL

Type: Open collector

Inactive level: 0V

Active level: 4V-24V

Maximum current on output transistor: 50 mA


Maximum power on output resistor: 125 mW

Maximum power on output zener 36 V: 300 mW

Frequency: 75 Hz +/- 2%

Protection class: Class 2

ESD class: Compliance with IEC 61000-4-2 (ESD)

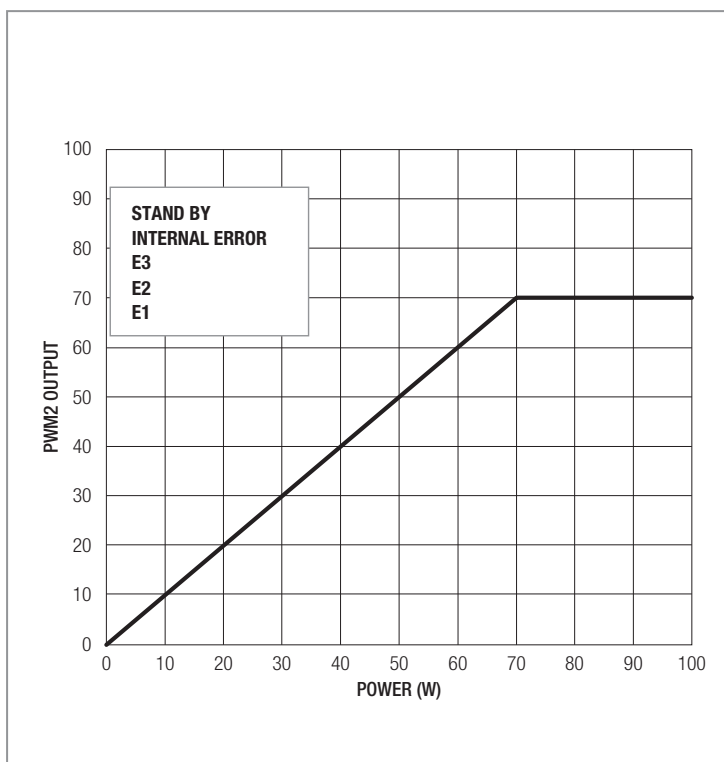

| WORKING AREA | DUTY CYCLE PWM |
|-------------------------------------|----------------|
| RUNNING PUMP | 1%-70% |
| ERROR 1 DRY RUN | 75% |
| ERROR 2 LOCKED ROTOR | 80% |
| ERROR 3 SHORT CIRCUIT | 85% |
| INTERNAL ERROR | 90% |
| STANDBY (STOP) BY PWM INPUT SIGNAL | 95% |

DWA

PUMPS SELECTOR

On-line product selection



DAB PUMPS LTD.
Unit 6 Gilberd Court
Newcomen Way, Severalls Park
CO4 9WN
Colchester
ordersuk@dwtgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.
Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545



DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 553 2621



DAB PUMPS BV
'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS SOUTH AFRICA (PTY) LTD
Twenty One industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1667 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997



DAB PUMPS B.V.
Statenlaan, 4
5223 LA, 's-Hertogenbosch
Nederland
info.nl@dabpumps.com
Tel. +31 416 387280



DAB PUMPS POLAND Sp. z o.o.
Ul. Cieslewskich 35K
03-017 Warszawa - Poland
sprzedaz@dabpumps.com.pl



DAB PUMPS (QINGDAO) CO. LTD.
No.10 Xindong Road
Jiulong Town,
Jiaozhou City
266319 Qingdao (Shandong) - China
sales.cn@dwtgroup.com
Tel. +86 400 186 8280



DAB PUMPS FRANCE SAS
Tour Ariane, Paris la Défense 9
5, Place de la Pyramide
92800 Puteaux - France
info.fr@dabpumps.com
Tel. +33 (0)6 79 63 05 46
+33 (0)7 89 01 53 35



DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1- 843-797-5002
Fax 1-843-797-3366



DAB PUMPS OCEANIA PTY LTD
426 South Gippsland Highway,
Dandenong South VIC 3175 - Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677



DAB PUMPS GMBH
Am Nordpark 3
D - 41069 Mönchengladbach - Germany
info.germany@dwtgroup.com
Tel. +49 2161 47388-0
Fax +49 2161 47388-36



DAB PUMPS CANADA INC.
333 Bay Street, Suite 4600, Toronto,
Ontario, M5H 2S5, - Canada
orders@dwtgroup.ca
Tel. 1-833-322-7867



PT DAB PUMPS INDONESIA
Satrio Tower lantai 26
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia
Tel. +62 2129222850